





HUADE
AMÉRICA

Catálogo de Produtos

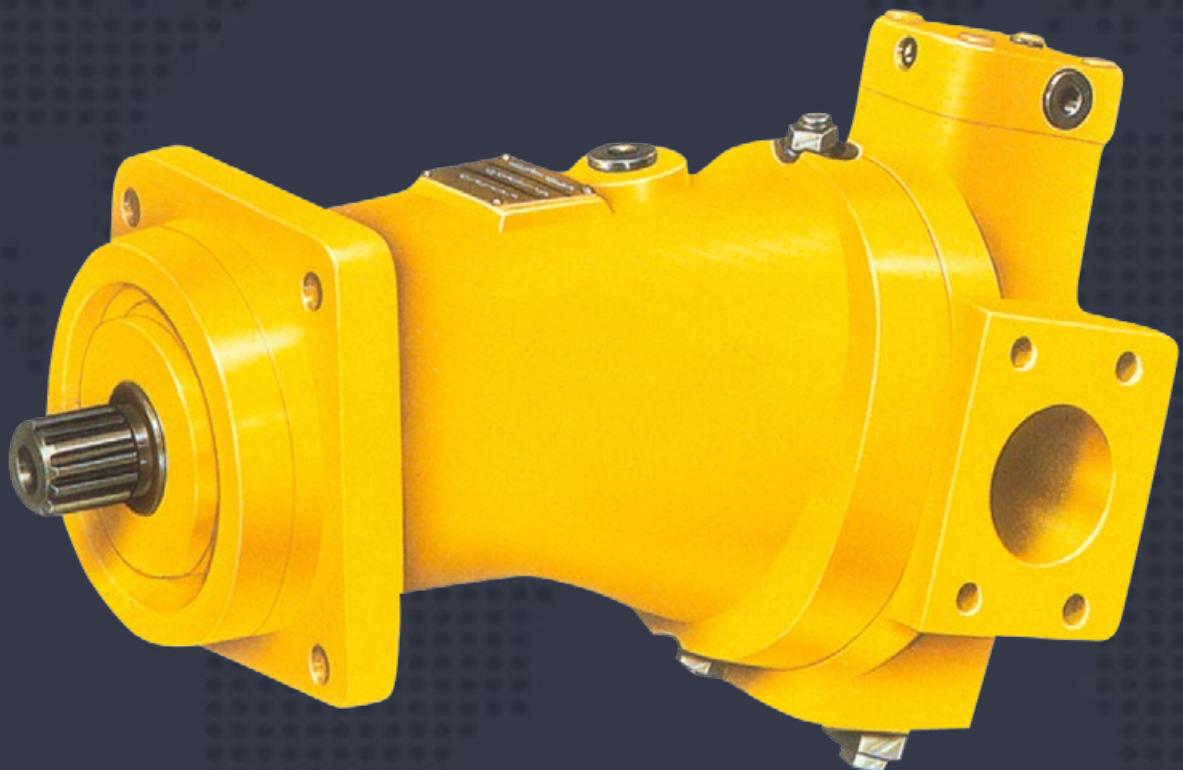

Variable Displacement Pump - A7V

北京华德液压工业 集团有限责任公司 BEIJING HUADE HYDRAULIC INDUSTRIAL GROUP CO.,LTD.	A7V 变量泵 Variable Displacement Pump A7V 用于开式回路 For open circuits 规格 Size 20-500	斜轴式轴向柱塞结构 axial tapered piston,bent axis design 高压范围 Peak pressure 至 up to 40MPa	RC92100/12.2004 替代: Replace RC92100/09.2003
--	---	--	--

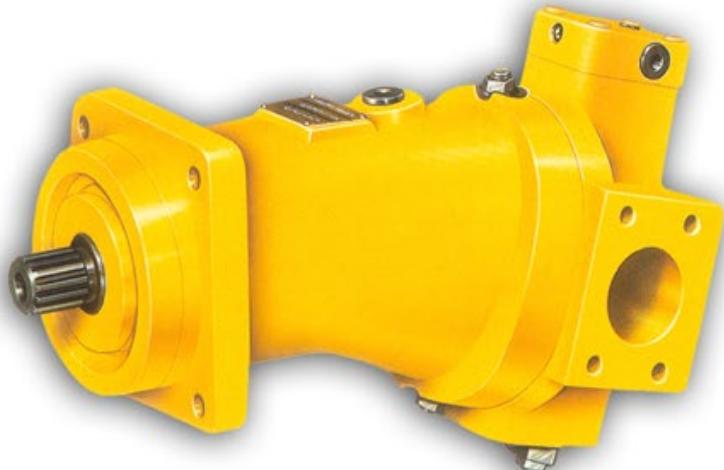

说明:

- 斜轴式轴向柱塞泵，用于开式回路静液压传动中。
- 流量与驱动转速及排量成正比，在恒定驱动转速下，可以无级变化。
- 控制装置品种齐全，用于每种控制和调节功能。
- 用矿物油和抗燃液体工作。

结构特点:

结构1

- 高性能的旋转组件及球面配油盘，可实现自动对中，低周速，高效率。
- 驱动轴能承受径向载荷。
- 长寿命。
- 低噪声级。

结构5.1

- 具有提高技术数据后的新型高性能
旋转组件及经过考验的球面配油
盘。
- 结构紧凑。

Description


Variable displacement pump, axial piston, bent axis design, for hydrostatic transmissions in open circuits.
The flow is proportional to the drive speed and the displacement and is steplessly variable at constant drive speed.
comprehensive programme of control devices for every control and regulation function.
operation of both mineral, and fire-resistant fluids.

Special Features

series 1


High performance rotary group with well-proven spherical control area offering the following advantages :self-centering, low peripheral speed, high efficiency.
Long service life robust rolling bearing.
Drive shaft will support radial loads.
Low noise level.
High duty roller bearing for inter-mittent high pressure operation.
For continuous duty hydrostatic bearing are available.

剖视图

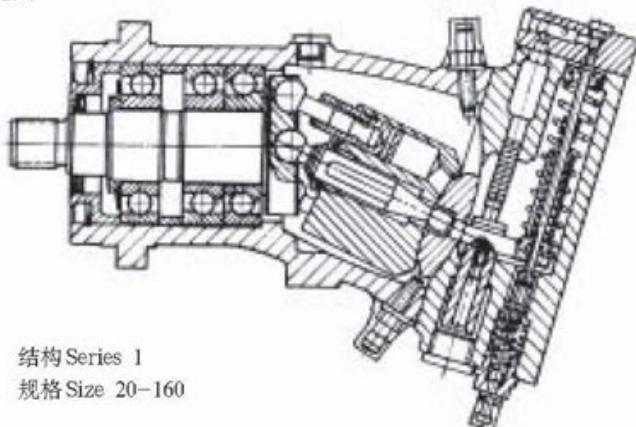

结构 Series 1
规格 Size 20-160

Section

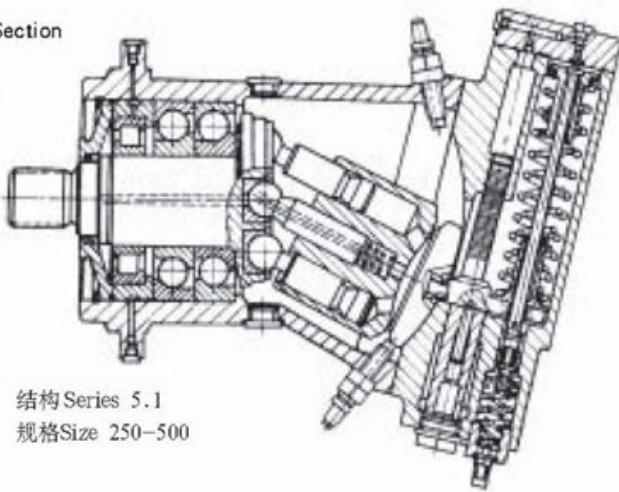

结构 Series 5.1
规格 Size 250-500

A7V变量泵 Variable Displacement Pump A7V

型号说明 Type Code

A7V 55 LV 1 L Z F O O													
泵型号 Pump Type				辅助元件 Auxiliary Equipment									
变量泵 Axial piston variable displacement pump				没有 none <input type="checkbox"/> O									
规格 Size				行程限位 Stroke Limiter									
0~20.5				没有 none <input type="checkbox"/> O									
8.1~28.1				机械行程限位 Stroke limiter <input type="checkbox"/> M									
0~40.1				(用于 LV 和 DR) mechanically adjustable (for LV and DR) <input type="checkbox"/>									
15.8~54.8				液压行程限位 Stroke Limiter, hydraulic (用于 LV) (for LV) <input type="checkbox"/> H									
0~58				油口连接 Pipe Connections									
23.1~80				压力油口: Pressure port: <input type="checkbox"/>									
0~78				SAE法兰; 在侧面 SAE flange, on side <input type="checkbox"/> F									
30.8~107				吸油口: Suction port: <input type="checkbox"/>									
0~117				SAE法兰; 在侧面 SAE flange, on side <input type="checkbox"/>									
46.2~160				压力油口: Pressure port: <input type="checkbox"/> G									
0~250				螺纹连接, 在侧面 threaded, on side <input type="checkbox"/>									
0~355				吸油口: Suction port: <input type="checkbox"/>									
0~500				SAE法兰; 在侧面 SAE flange, on side <input type="checkbox"/>									
(排量 Displacement V _{min} ~V _{max} ml/r)													
变量方式 Control Device													
恒功率变量		Constant horsepower control		轴伸 Shaft End									
		LV		花键 splined shaft DIN 5480 <input type="checkbox"/> Z									
恒压变量		Constant pressure control		花键 splined shaft GB 3478.1~83 <input type="checkbox"/> S									
		DR		平键 keyed shaft GB1096~79 <input type="checkbox"/> P									
电控比例变量		Electrical control (with prop.solenoid)		转向(从轴端看) Direction of Rotation(Viewed of shaft end)									
		EP		顺时针 clockwise <input type="checkbox"/> R									
液控变量		Hydraulic control pressure related		逆时针 anti-clockwise <input type="checkbox"/> L									
		HD											
手动变量(带手轮)		Manual control (with handwheel)											
		MA											
刹车变量		Brake control											
		SC											
数字变量		Numerical control											
		NC											
结构型式		Series											
见剖视图		see section											
		1											
		5.1											
订货示例: A7V.55.LV.1.L.Z.F.O.O Ordering Example: A7V.55.LV.1.L.Z.F.O.O													
轴向柱塞变量泵 A7V, 规格 55, size 55. With constant horsepower control, series 1.													
恒功率控制, 结构 1 逆时针旋转, 花键, SAE法兰连接, 没有行程限位器和辅助元件。 anti-clockwise rotation, splined shaft SAE side flange connections, without auxiliary equipment.													

A7V变量泵 Variable Displacement Pump A7V


技术参数表		Technical Data														
(理论值, 未考虑机械效率和容积效率)		(theoretical values, without considering mech-hyd. and volumetric efficiency)														
规格	Size		20	28	40	55	58	80	78	107	117	160	250	355	500	
变量方式	control Device															
LV 恒功率变量	Constant HP control		•	•	•	•	•	•	•	•	•	•	•	•		
LVS 恒功率负荷传感变量	Constant HP control with load sending										•					
DR 恒压变量	Constant pressure control		•	•	•	•	•	•	•	•	•	•	•	•		
DRS 恒压负荷传感变量	Constant pressure control with load sending										•					
HD 液控变量	Hydraulic control		•	•	•	•	•	•	•	•	•	•	•			
EP 电控比便变量	Electric control(Proportional)		•	•	•	•	•	•	•	•	•	•	•			
MA 手动变量	Manual control		•	•	•	•	•	•	•	•	•	•	•			
SC 刹车变量	Brake control									•	•	•	•			
NC 数字变量	Numerical control								•	•						
排量	Displacement		V _{gmax}	mi/r	20.5	28.1	40.1	54.8	58.8	80	78	107	117	160	250	
355	500															
		V _{gmin}	mi/r	0	8.1	0	15.8	0	23.1	0	30.8	0	46.2	0	0	0
最高转速 Max.speed ³	在 0.09MPa ¹	n _{max} 0.09	r/min	3800	2800	3200	2360	2850	2120	2540	1900	2240	1650	1400	1250	1120
	在 0.1MPa ¹	n _{max} 0.1	r/min	4100	3000	3400	2500	3000	2240	2700	2000	2360	1750	1500	1320	1200
	在 0.15MPa ¹	n _{max} 0.15	r/min	4750	3600	3750	3000	3350	2750	3000	2450	2650	2100	1850	1650	1500
	在 n _{max} 0.09	Q _{max} 0.09	L/min	76	76	124	125	161	164	192	197	254	256	340	430	543
最大流量 Max.flow ²	在 Q _{max} 0.1	Q _{max} 0.1	L/min	82	82	132	133	170	174	204	208	267	271	364	455	582
	在 n _{max} 0.15	Q _{max} 0.15	L/min	94	98	146	160	190	213	227	254	300	326	449	568	728
	在 Q _{max} 0.09	P _{max} 0.09	KW	45	46	75	75	97	99	116	119	153	154	204	259	326
	在 Q _{max} 0.1	P _{max} 0.1	KW	49	49	80	80	102	105	123	125	161	163	218	273	350
(△p=35MPa)	在 Q _{max} 0.15	P _{max} 0.15	KW	57	59	88	96	114	128	136	153	181	196	270	342	437
	流量 Flow Q ²	在 NE=1450r/min	L/min	28.8	39.5	56.4	77.1	82.3	112.5	109.7	150.5	164.6	225	—	—	—
功率 Power																
P(△p=35MPa)	在 NE=1450r/min	KW	17	24	34	46	50	68	66	91	99	135	—	—	—	—
扭矩 Torque	在 V _{gmax}	Nm/10MPa	32.6	44.6	63.7	87	93.2	127.5	124	169.7	186	254	397.5	564.5	795	
M(△p=10MPa)	在 V _{gmin}	Nm/10MPa	—	12.9	—	25.1	—	36.8	—	49	—	73.5	—	—	—	—
最大扭矩 (△p=35MPa)	在 V _{gmax}	Nm	114	156	223	305	326	446	431	594	651	889	1391	1975	2782	
Max.torque M _{max}	在 V _{gmin}	Nm	—	45	—	88	—	129	—	171	—	257	—	—	—	—
惯性矩 Moment	J	kgm ²	0.0017	0.00170	0.00520	0.00520	0.01090	0.0109	0.0167	0.0167	0.03220	0.0322	0.0880	0.16000	0.270	
重量 Weight	kg	19	19	28	28	44	44	53	53	76	76	105	165	245		

1)所示值为吸油口S的绝对压力,且在V_{gmax}用矿物油工作。
 2)以容积效率97%算出。
 3)即使在更高的负载下,最高转速不得超过0.15MPa时的数值,但对于V_{gmin}>0的那些规格:28-20,55-40,80-85,107-78,160-117,通过减少排量(V_g<V_{gmax})和维持最大流量,最高转速可提高到V_{gmin}=0的那些规格的值。

1)The values shown are valid for V_{gmax},with an absolute pressure at suction inlet S and when operated on mineral oil.
 2)Calculated with a volumetric efficiency of 97%.
 3)The maximum speeds at 0.15MPa shown must not be exceeded ,even with higher loading. On those sizes with V_{gmin}>0,however the maximum speeds can be increased to the values for those sizes with V_{gmin}=0 by reducing the displacement(V_g<V_{gmax}) and maintaining max.flow.The relevant sizes are 28-20,55-40,80-85,107-78,160-117.

允许转速N_{perm}和吸油口压力P_{abs}可由诺模图确定,不过必须考虑最高转速(见参数表)及最低和最高吸油压力。

Permissible speed n_{perm} and suction pressure P_{abs} can be read from the nomograph. However, the max. speeds (see table) and min. and max. suction pressure must be taken into account.

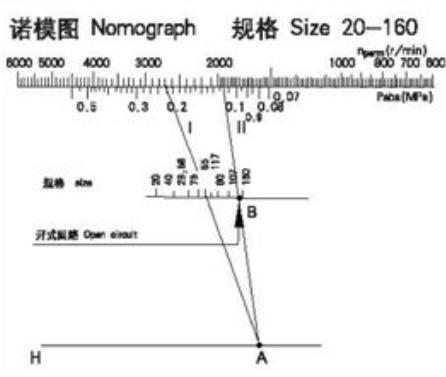

例:
 给定: 规格 55, 驱动转速 2700r/min.
 求: 吸油口S处的绝对压力, P_{abs}.
 解: 从n_{perm}刻度向规格联直线与线H相交于A点,再从A点向B点连直线I得到P_{abs}=0.117MPa.

Example: Given: size 55D rive speed 2700r/min Required: pressure P_{abs} at the suction inlet.

Solution: Line I on scale n_{perm} drawn towards size 55 crosses line H at port A . Line II from point A to point B(open circuit) gives the result P_{abs}=0.117MPa.

A7V 变量泵 Variable Displacement Pump A7V

技术参数 Technical Data

进口工作压力(S口绝对压力)Inlet Operation Pressure

Absolute pressure at port S

$P_{abs\ min}$ 0.08MPa

$P_{abs\ max}$ 0.2MPa

出口工作压力范围 Operating Pressure Range—Outlet Side

额定压力 Nominal pressure $p_N = 35\text{ MPa}$

最高压力 Peak pressure $p_{max} = 40\text{ MPa}$

油温范围: Fluid Temperature Range

t_{min} -25°C

t_{max} +80°C

粘度范围: Viscosity Range:

V_{min} 10mm²/s

V_{max} (短时)(for short periods)1000mm²/s

最佳工作粘度:Optimum Operating Viscosity:

V_{opt} 16—36mm²/s

油液选择: Fluid Recommendation

工作温度 推荐粘度等级符合DIN51519

Operating Recommended Viscosity grade

temperature to DIN 51519

range ISO(VG) (在 40°C 时, at 40°C)

30—40°C VG22 . 22mm²/s

40—50°C VG32 . 32mm²/s

50—60°C VG46 . 46mm²/s

60—70°C VG68 . 68mm²/s

70—80°C VG100 . 100mm²/s




图 Fig.1
Mounting on Top of Tank

when mounting outside a tank, the pump must be bled at port U1 or U2 prior to commissioning.

Mounting on Top of Tank

Mounting of the A7Vvariable pump above tank must be considered as a special pump

installation and should only be realized under specific conditions.

When ordering pumps for mounting on top of tank, state in clear text: "To Be Used for Above Tank Mounting"

This installation requires that the suction port be at the top and the suction pipe be kept as short as possible and the end of the pipe be at least 200mm below minimum oil level, see Fig2.

The cross-cut of the suction pump should be so dimensioned to ensure that the flow velocity of the pressure fluid lies between 0.8 and 1m/s.

灌油和排气



图 Fig. 2

液压油的过滤:

推荐过滤精度为 10μm。亦可使用 25—40μm 的, 但使用 25μm 的可以延长使用寿命, 元件磨损减少。

安装位置

任选。泵壳内必须始终充满油液。当装于油箱内时, 油口 R 的螺塞必须取下, 此油口必须在顶部, 并拧上一个 90° 的弯头(以减少噪音)。驱动轴朝上垂直安装:

对此必须定货带有油口 U₁ 和 U₂ 的型号 (用文字说明带油口 U₁ 和 U₂)。最低液面不低于 “A” 线, 如图 1 所示。

该泵装于油箱内时油口 U₁ 和 U₂ 和 R 的螺塞必须取下, 当装于油箱外时, 泵在启动前必须在油口 U₁ 或 U₂ 排气。

泵装于油箱顶部:

A7V 变量泵装于油箱顶部应看作特殊安装, 只能在特定的条件下实现订货时请注明: 用于油箱顶部安装。

这种安装要求吸油口位于上方, 吸油管尽可能短, 管端至少低于最低液面 200mm 见图 2。

吸油管的内径应保证油的流速在 0.8 至 1m/s 之间。

Filtration of Hydraulic Fluid

Recommended filtration 10μm Coarser filtration of 25—40μm is possible, but longer component life, will be achieved using 10μm filtration due to lowest component wear.

Mounting Position

Optional, The pump housing must always be filled with oil. When mounting within a tank the plug must be removed from port R and this port must be at the top. 90°C pipe bend to be screwed in (noise reduction).

Note:

Vertical mounting with drive shaft pointing upwards: for this case a model with ports U₁ and U₂ must be ordered (indicate in clear text: "with ports U₁ and U₂"). The minimum oil level must not fall below the "A" line, as shown in Fig1.

规格 规格 最高转速 1) 吸油管最大长度

Size	Max speed	Max length of suction	吸油管最大长度	Calculated suction pipe I.D. (mm) at flow velocity V=0.9m/s and V_{max} . n _{max} (r/min) n _E =1450(r/min)
	n _{max} r/min	L _{max} (mm)	speed 转速	转速
20	3610	600	41.8	26.5
28	2660	600	42	31
40	3040	750	53.6	37
55	2240	750	53.8	43.3
58	2700	750	61.3	45
80	2015	750	61.6	52.3
78	2410	750	66.6	51.6
107	1800	750	67.5	60.5
117	2125	850	76.6	63.3
160	1565	850	77	74

1)此数值仅适用于吸油口绝对压力为 0.09MPa, 排量为 V_{max} 及用矿物油工作时。

注:

A7V 泵只能在泵处于最大摆角 (V_{max}) 时启动, 对于调节从 V_{min} 开始的泵, Q_{min} 限位螺钉必须调到最小流量 $\geq V_{max} \cdot 5\%$ 处, 以免在零位工作时吸油管放空。

在流速 V=0.9m/s 和下 V_{max} 下算出的吸油管内径(mm)

Calculated suction pipe I.D. (mm) at flow velocity V=0.9m/s and V_{max} .

1)The values shown are valid for V_{max} , with 0.09MPa absolute pressure at suction inlet S and when operated on mineral oil.


Note:

Start-up of the pump with all controls is only possible when the pump is at its full swivel angle (V_{max}). For pumps with minimum flow of $\geq 5\% \text{ of } V_{max}$ in order to avoid emptying of the suction line during zero position operation.

A7V变量泵 Variable Displacement Pump A7V

规格 Size 250–500

吸油口 S 处的绝对压力和转速增加时排量减少值的计算。
Calculation of Inlet Pressure Pabs at Suction Inlet S and of Reduction in Displacement at Increased Speeds.

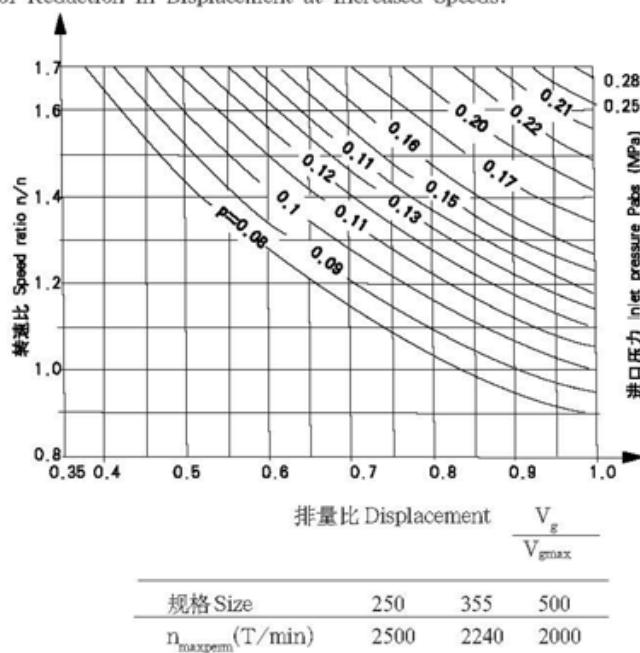

示例

给定：规格 500，驱动转速 1320r/min

求：吸油口 S 的压力 Pabs

$$\text{解：转速比 } \frac{n}{n_{\text{max},1}} = \frac{1320}{1200} = 1.1$$

在最大摆角下给出 $P_{\text{abs}} = 0.12 \text{ MPa}$

如果对本例说仅在 $P_{\text{abs}} = 0.1 \text{ MPa}$ 时能自流，则排量须减小到 87.6%。

Example:

Given:

Size 500

Drive speed 1320rpm

Required:

pressure P_{abs} at suction inlet S

Solution: speed ration

$$\frac{n}{n_{\text{max},1}} = \frac{1320}{1200} = 1.1$$

gives an inlet pressure of $P_{\text{abs}} = 0.12 \text{ MPa}$

at full swivel for example free flow is only possible with $P_{\text{abs}} = 0.12 \text{ MPa}$, the displacement must be reduced to 87.6%.

n_{max} = 最高允许转速 Max, perm speed.

规格计算 Calculation of Size

$$\text{流量 Flow } Q = \frac{V_g \cdot n \cdot \eta_v}{1000} \quad [\text{L}/\text{min}]$$

$$\text{驱动扭矩 Drive Torque } M = \frac{1.59 \cdot V_g \cdot \Delta P}{10 \cdot \eta_{\text{mh}}} \quad [\text{Nm}]$$

$$\text{驱动功率 Drive Power } P = \frac{M \cdot n}{9549} = \frac{Q \cdot \Delta P}{60 \eta_t} \quad [\text{kW}]$$

V_g = 排量 geom. displacement per rev(mL/r)

ΔP = 压差 differential pressure(MPa)

n = 转速 speed(r/min)

η_v = 容积效率 volumetric efficiency

η_{mh} = 机械效率 mech. hyd. efficiency



η_t = 总效率 overall efficiency

[$\eta_t = \eta_v \cdot \eta_{\text{mh}}$]

行程限位器 Stroke Limiter:

通过机械行程限位器可无极的改变或限制最大排量，调节范围从 V_{gmax} 到 V_{gmin} 。

By means of a mechanical or hydraulic stroke limiter, the max. displacement can be infinitely varied or limited. Adjustment range from V_{gmax} to V_{gmin} .

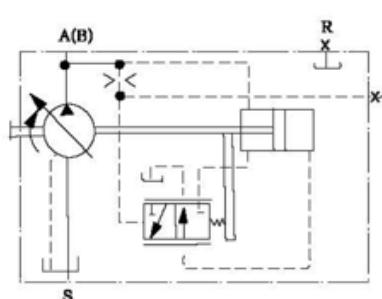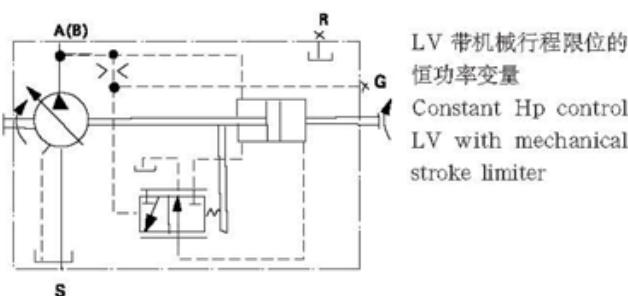

LV 恒功率变量
Constant Hp control LV

规格	20	40	58	78	117	250	355	500
Size	28	55	80	107	160	21.25	24	25
螺杆转数	23	21	28	31	26	21.25	24	25
Spindle Revolutions								
所需扭矩	80	140	500	630	—	—	—	—
Required Torque (approx.) Ncm								


A7V 变量泵 Variable Displacement Pump A7V

液压行程限位器需要不小于工作压力10%的先导压力(X1油口)。油口X1的最高允许压力=20MPa(对所有规格),如果需要限制工作压力<5MPa时的流量,则需在油口X2施加不低于5MPa的供油压力(油口X1压力为5.10%=0.5MPa)。

A Pilot pressure(port X1)of at least 10% of the operating pressure is required for the hydraulic stroke limiter Max. permissible pressure at port X1=20MPa(for all sizes)

if it is required to limit the flow at an operating pressure <5MPa then a boost pressure of min 5MPa must be applied at port X2(at port X1 then,min10% =0.5MPa

LV带液压行程限位的恒功率变量Constant HP control LV with hydraulic stroke limiter

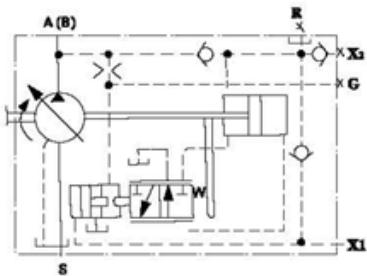

辅助元件：压力切断 Auxiliary Equipment; Pressure Cut-Off

适用于 $V_{gmin}=0$ 的所有规格。

压力切断是叠加在恒功率控制的恒压控制,它借助于顺序阀,当达到设定的最高压力时(调节范围到31.5MPa),该阀打开,流量自动减小至Q=0.顺序阀与泵分开安装,可装于任何适当位置(遥控)的底板上。其连接管长(单管)不得大于5m,顺序阀与底板需要独订货。

当采用带压力切斷的恒功率变量时,泵变量时间将比恒压变量泵DR的长3倍。


注意:顺序阀油口T和先导回油口T1必须直接通回油箱。

在零位连续工作见DR 恒压变量。


LV 的 Q-P 特性曲线 Characteristics

不带压力切断

without Pressure Cut-off

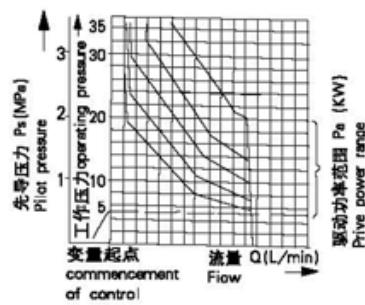

带压力切断
with Pressure Cut-Off
驱动功率范围 Pa(KW)



规格 Size	20	28	40	55	58	80	78	107	117	160	250	355	500
转速 Speed	n no r/min	1450	1450	1450	1450	1450	1450	1450	1450	1450	1450	980	980
最大流量 Max. Flow Q at no	L/min	28	39	57	77	81	110.5	110	150	165	225	237	337 475
驱动率范围不带压力切断	P _{omin}	3	4	5.5	7.5	7.5	11	11	15	15	22	22	30 45
Drive without pressure	P _{omax}	11	15	18.5	30	30	37	37	45	55	75	90	132 200
cut-off power 带压力切断 range	P _{omin}	3	—	5.5	—	7.5	—	11	—	15	—	22	30 45
P.(KW) with pressure cut-off	P _{omax}	10	—	18.5	—	27	—	37	—	55	—	90	132 200

当转速为n时换算如下 Conversion to speeds n(rpm) other than n.

$$\text{驱动功率 Drive power } P = P_0 \cdot \frac{n}{n_0}$$

For all sizes with $V_{gmin}=0$

The pressure cut-off is a constant pressure control superposed on the constant HP control and is carried out by means of a sequence valve. When the set maximum pressure is reached (adjustment range up to 31.5MPa), the valve opens and the flow is automatically reduced (to Q=0).


The sequence valve is mounted separately from the pump in any suitable location one subplate (remote control).

The max./single pipe length must not exceed 5 m. order sequence valve and subplate separately.

When using the constant HP control with pressure cut-off, the pump control times will be approximately 3 times longer than those obtained with the constant pressure control DR. Important : Port T from the sequence valve and pilot oil return line T1 must be piped direct to tank(cooler). Continuous operation in zero position see constant pressure control DR.

LV 带压力切断 (遥控) 和液压行程限位的恒功率变量

Constant HP control LV with pressure cutoff(remote controlled)and hydraulic stroke limiter

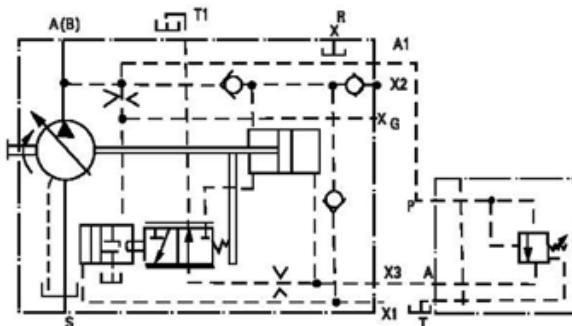

接口 connections

A,B 工作油口 service lines

S 吸油口 suction-line

G 总功率控制油口 port for summation HP control line

X1 先导压力口 pilot pressure

X2 遥控口 remote contr.pressure

A1、X3 遥控阀油口 ports for remote control valve

T1 先导回油口 pilot oil return

R 排气口 air bleed

1)以容积效率 97% 算出。

Calculated with a volumetric efficiency of 97%

A7V变量泵 Variable Displacement Pump A7V

改变型：恒功率负荷传感变量(LVS)

负荷传感阀是个流量控制阀，它工作时作为负载压力的函数来调节泵的排量以使之与负载的需求相匹配。在低于功率曲线的整个范围内，泵的流量受装在泵与负载之间的外部节流孔(控制块，节流阀)的影响，而不受负载压力的影响。该阀比较节流孔前后的压力并用节流孔压降(压差 ΔP)把泵流量保持恒定。如果压差增大，则泵向 V_{gmin} 变化，如果压差减小，则泵向 V_{gmax} 变化，直到在阀中恢复平衡。

$$\Delta P = P_{pump} - P_{serviced\ unit}$$

ΔP 可设定成 14–25bar, 标准设定 18bar(请用文字说明所需设定值)。零行程工作(节流阀关闭)时的启动压力比 ΔP 设定值高出 2bar。


恒功率控制和压力切断越权于负荷传感阀，既负荷传感功能能在低于设定功率曲线设定压力时工作。节流阀不包括在标准供货中。

Variation: Constant HP Control with Load Sensing


The load sensing valve is a flow control valve which operates as function of the load pressure to regulate the pump displacement in order to match the requirement of the consumer unit. The pump flow is influenced by the external orifice(control block, throttle) fitted between pump and serviced unit, ber curve. The valve compares pressure before and after the orifice and maintains the pressure before and after the orifice and maintains the pressure drop (differential pressure ΔP) across the orifice—and therefore the pump flow—constant. if differential pressure ΔP increases, the pump is swivelled back towards V_{gmin} , and if ΔP decreases the pump is swivelled out towards V_{gmax} , until a balance is restored within the valve.

$$\Delta P = P_{serviced\ unit}$$

ΔP may be set with the range 14 bar to 25 bar. The standard setting is 18 bar (please state required setting in clear text). The stand by pressure for zero stroke operation(orifice close)is approx. 2 bar above the ΔP setting. The constant power control and the pressure cut-off are super imposed on the load sensing valve, for example the set power hyperbola and set pressure the orifice is not included in the standard in the standard supply.

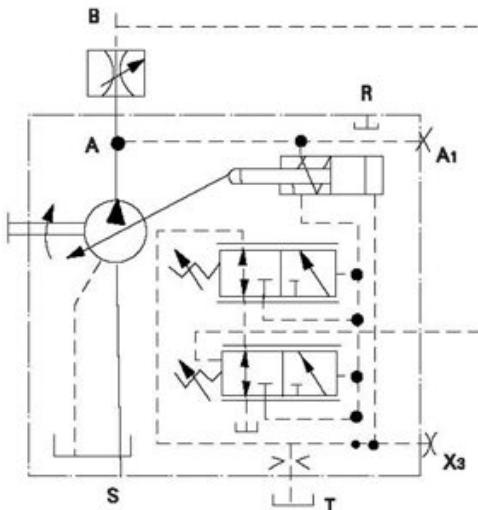

LVS 恒功率负荷传感变量
Constant HP control with load Sensing

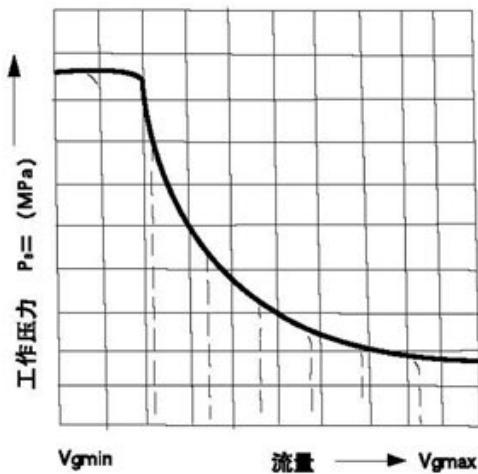

DR 恒压变量

恒压变量在其变量范围内保持系统压力恒定不受泵流量变化的影响，变量泵仅供应工作必须的油液体积。如果压力超过设定值，则泵自动摆回小角度。

所需压力可直接在泵上设定(阀内装，标准型)，也可在用于带遥控型单独的顺序阀上设定。设定范围 5–35MPa。


遥控的设定范围 5–35MPa。

Constant Pressure Control

The constant pressure control maintains the pressure in a hydraulic system constant within its control range in spite of changing pump flow requirements. The variable pump supplies only the volume of fluid required by the services, Should operating pressure exceed the set pressure, the pump is automatically swivelled back to a smaller angle. The required pressure is set either direct at the pump(valve built in standard model) or at the separate sequence valve for the model with remote control.



Setting range from 5 to 35MPa.

Setting range for remote control 5 to 31.5MPa.

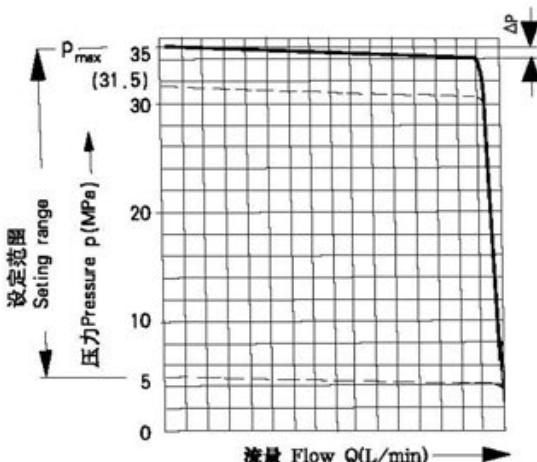

规格 Size	20–17	250–500
ΔP Max (MPa)	1	1.4

A7V 变量泵 Variable Displacement Pump A7V

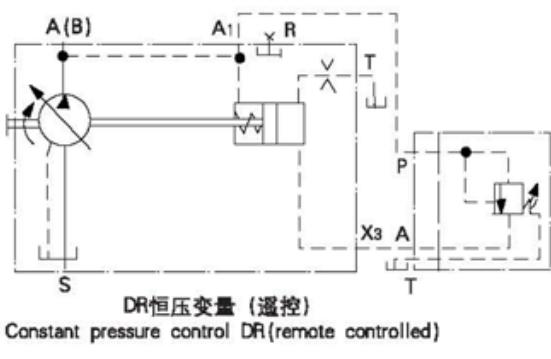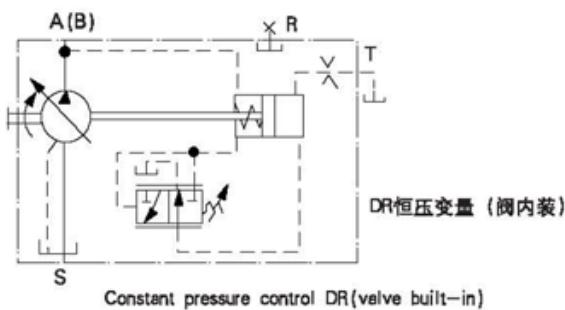

注:
顺序阀和底板须单独定货。
最大遥控管单根长度不超过5m。
顺序阀油口T须单独接回油箱。
装于系统中用于压力保护的安全
阀,其压力设定必须比恒压变量
的压力设定值高2MPa。

Note:
Order sequence valve subplate
separately. The max.single pipe
length should not exceed 5m. Port
T from the sequence valve must
be piped separately to tank. A
pressure relief valve installed in
the system for protection of the
max.pressure must be set 2MPa
above the setting of the constant
pressure control.

调节时间 Adjustment times					
规格 Size	20	40	58	78	117
V _{gmin} -V _{gmax}	te(S)	0.16	0.2	0.25	0.25
卸压 35-5MPa					
Pressure unloading	V _{gmax} -V _{gmin}	ta(S)	0.03	0.04	0.05
升压 5-35MPa			0.05	0.06	
Pressure built-up					

对于遥控,表中数值增大3倍。
The values in the table are
increased by 3 times for re-
mote control.

并联工作 Parallel Operation

几台A7V恒压变量泵并联工作时,其恒压曲线较陡。在订货时
请注明“并联工作”。

并联工作时每台泵需要各自的顺
序阀。

For parallel operation of several
A7V pumps with constant pres-
sure control, a steeper curve is
used for the constant pressure
control.

Please indicate this requirement in
text after the type code when or-
der in ("parallel operation").
For parallel operation each indi-
vidual pump requires its own se-
quence valve.

行程限位 Stroke Limiter

借助于机械行程限位器可把最
大排量无级地限制在V_{gmax}与
V_{gmin}之间,详见LV变量。

在零位连续工作 Continuous Operation in Zero Position

不带体冲洗的零行程工作

Stroke Limiter

The max. displacement can be
steplessly limited between V_{gmax}
to V_{gmin} by means of a mechanical
stroke limiter.


For details see control device LV.
Continuous Operation in Zero Position
Zero stroke operation without
flushing of housing.

短期 short periods <10min
(~50%ED)

最高允许压力 max.perm pressure	最高允许温度 max.perm tank temper- ature	最高允许压力 max.perm pressure	最高允许温度 max.perm tank temper- ature
p _{max} (MPa) 31.5	t _{max} (°C) 50	p _{max} (MPa) 20	t _{max} (°C) 50

带壳体冲洗的零行程工作

Zero stroke operation with flushing of housing



长期 long periods

最高允许压力 max.perm pressure	最高允许温度 max.perm tank temper- ature
p _{max} (MPa) 31.5	t _{max} (°C) 50

冲洗流量 Flushing flow

规格 Size	20	40	58	78	117	250	355	500
流量 flow Qsp 1/min	2	4	6	8	12	12.5	16	25


冲洗液温度 ≤油箱温度

注:当所A7V泵装于油箱顶部
在Pmax为31.5MPa下长时间
零行程工作时,必须提供≥上
表对应规格的冲洗流量对壳体
冲洗。

Temperature of flushing fluid ≤ tank temperature

Note: When mounting the A7V on
top of tank and at zero stroke op-
eration for longer periods of time
at pressures up to P_{max} 31.5MPa a
minimum flow ≥ corresponding to
flushing flow as indicated for each
size in the above table must be set
instead of case flushing.

零行程时的功率 Power at Zero Stroke



规格 Size

在转速 n=1450r/min 油温
t=50°C 时的典型曲线

Typical values at speed
n=1450rpm
fluid temperature=50°C

零行程时的功率(KW)

Power at zero stroke(KW)

改变型：恒压负荷传感变量(DRS)

负荷传感阀是个流量控制阀,它工作时作为负载压力的函数来调节泵的排量以使之与负载的要求相匹配。在低于设定压力的整个范围内,泵的流量受装在泵与负载之间的外部节流孔(控制块,节流阀)的影响,该阀比较节流孔前后的压力并用节流孔压降(压差) ΔP 使泵流量保持恒定。

如果压差 ΔP 加大,则泵向 V_{min} 变量,而如果 ΔP 减小,则泵向 V_{max} 变量,直到在阀中恢复平衡。

$$\Delta P = P_{\text{pump}} - P_{\text{serviced unit}}$$

ΔP 可设定为14–25bar,标准设定为18bar(请用文字注明所需设定值)。

零行程工作时(节流阀关闭),启动压力约比 ΔP 设定值高出2bar。恒压力控制越权于负荷传感阀,即负荷传感功能在低于设定压力时工作。


节流阀不包抱在标准供货中。

Variation: Constant Pressure control with Load sensing


The load sensing valve is a flow control valve which operates as function of the load pressure to regulate the pump displacement in order to match the requirement of the consumer unit. The pump flow is influenced by the external orifice(control block, throttle) fitted between pump and serviced unit, but is not affected by load pressure throughout the range below the power curve. The valve compares pressure before and after the orifice and maintains the pressure before and after the orifice and maintains the pressure drop(differential pressure ΔP)across the orifice—and therefore the pump flow—constant. if differential pressure ΔP increases, the pump is swivelled back towards V_{min} , and if ΔP decreases the pump is swivelled out towards V_{max} , until a balance is restored with in the valve.

$$\Delta P = P_{\text{pump}} - P_{\text{serviced unit}}$$

ΔP may be set with the range 14 bar to 25 bar. The standard setting is 18 bar (please state required setting in clear text). The stand by pressure for zero stroke operation(orifice close)is approx.2 bar above the ΔP setting. The constant pressure control is superimposed on the load sensing valve, i.e., the load sensing function operates below the set pressure. The orifice is not included in the standard supply.

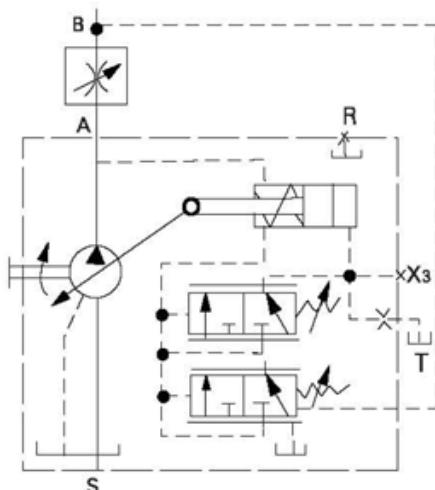

DRS 恒压带负荷传感变量
Constant pressure control with load sensing valve.

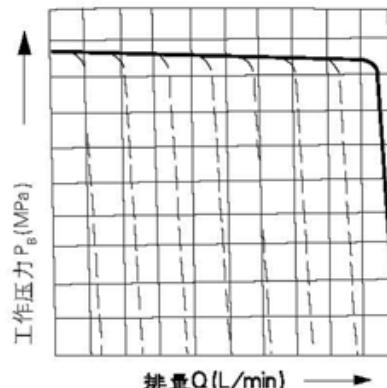

A7V 变量泵 Variable Displacement Pump A7V

EP 电控比例变量

电控比例变量可以无级地按程序控制泵的排量。泵排量与电磁铁吸力成正比，即与电磁铁的电流成正比。变量活塞上的控制力由比例电磁铁产生。比例电磁铁需要一个电流为300~630mA(600~1260mA)的24V(12V)，直流电源。

变量起点约在300mA(600mA). 变量终点约在630mA(1260mA)。调节从 $V_{g\min}$ 至 $V_{g\max}$. 如果需要反向控制($V_{g\max}$ 至 $V_{g\min}$)请询问我厂。

如果泵在零位启动或工作压力 <4 Mpa, 则油口G须接入4Mpa的先导压力。

Electric Proportional control

The electric control permits stepless and programmable adjustment of the solenoid force i.e. the strength of solenoid current. The control force on the control piston is generated by a proportional solenoid. The proportional solenoid need a 24V(12V)DC power supply that the current is 300~630mA(600~1260mA). commencement of control at approx. 300mA(600mA). End of control at approx. 630 mA (1260mA). Adjustment is from $V_{g\min}$ to $V_{g\max}$. please consult us if control in the opposite direction ($V_{g\max}$ to $V_{g\min}$)is required.
if the pump is to be moved out of the zero position ($V_g=0$) or if the operating pressure <4 Mpa, a pilot pressure of 4Mpa is necessary at port G.

调节时间 Adjustment Times

规格 Size	20	40	58	78	117
	28	55	80	107	160
$V_{g\min}-V_{g\max}$ t _{min} s(s)	0.16	0.2	0.25	0.25	0.3
$V_{g\max}-V_{g\min}$ t _{min} s(s)	0.12	0.16	0.2	0.2	0.25

*所示值仅适用于工作压力 $P_b=20$ Mpa时。

*The values shown are valid for operating pressure
 $P_b=20$ Mpa.

滞环

由于电气/液压控制(对于 $V_{g\min}$ 至 $V_{g\max}$ 的整个调节范围内), 在控制中约有2.5~4%的滞环。当从同一方向启动时泵位置的重复精度约为2~4%。

Hysteresis

A hysteresis of ± 2.5 to 4% (approx.) is present in the control because of the electric/hydraulic control(referred to the complete adjustment, range $V_{g\min}$ to $V_{g\max}$). The repeatability of the pump position, when starting from the same direction, is around 2~4%.

注:

只有当使用矿物油箱内最高油温不大于80°C时才能把EP变量泵装在油箱内。(如果把泵浸在油中, 请在订货时说明)。

Note:


Mounting of the pump with EP. control inside the oil tank is possible. only when using mineral hydraulic oils and with a max.oil temperature in the tank of 80°C.if the pump is to be submerged in oil ,please indicate in clear text when ordering). Auxiliary Equipment:Pressure Cut-Off

辅助元件: 压力切断


用于 $V_{g\min}=0$ 的所有规格。说明见HD变量。顺序阀和底板需单独订货。

For all sizes with $V_{g\min}=0$.

For description see control device HD. Order sequence valve and subplate separately

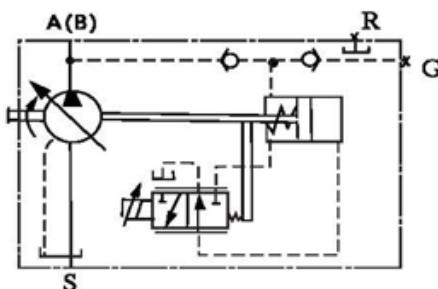


EP 电控比例变量 Electric pro. Control

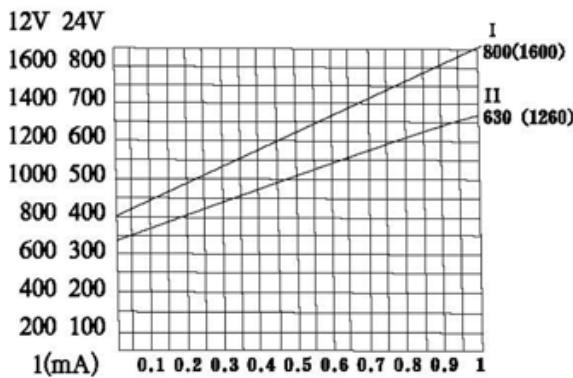

变量起点在 Commencement of control at $V_{g\min}$ $\frac{V_g}{V_{g\max}}$
注:

曲线I适用于 $V_{g\max} \geq 250$ ml/r; 曲线II适用于 $V_{g\max} < 250$ ml/r.
Line I adapts for $V_{g\max} \geq 250$ ml/r, Line II adapts for $V_{g\max} < 250$ ml/r.

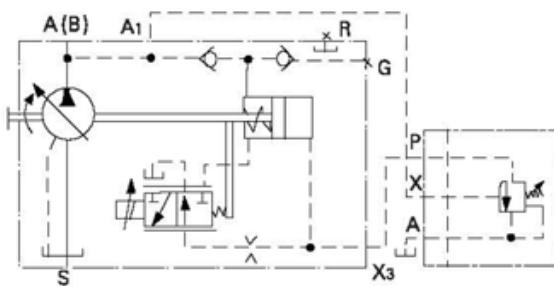

EP 带压力切断的电控比例变量 Electric Pro. Control with Pressure cut-off

接口 Connections

A,B 工作油口	Service lines
S. 吸油口	suction line
G. 遥控压力口	remote control pressure
R. 排气口	air bleed
A ₁ ,X ₃ ,遥控阀油口	ports for remote control valve

A7V变量泵 Variable Displacement Pump A7V

MA 手动变量

通过转动手轮借助于螺杆使变量活塞沿轴向运动，并经拨销使配油盘沿其滑动面运动，从而使泵在 $V_{g\min}$ 范围内无级地改变其排量。

Manual Control

By turning the handwheel, a piston is moved in an axial direction by means of a threaded spindle. A carrier pin moves the control lens on its sliding plane, thus permitting stepless variation of the pump displacement in the range $V_{g\min}$ to $V_{g\max}$. The pump position indicator is located in the handwheel.



接口 Connections

A,B	工作油口 service lines
S	吸油口 suction line
R	排气口 air bleed

MA 手动变量 Manual Control

HD 液控变量

液控变量可按先导压力无级地调节泵的排量，调节量与油口 X1 的先导压力成正比。

当用 HD 作 2 位变量时 ($V_{g\min}$ 至 $V_{g\max}$), X1 口的先导压力不得超过 4 MPa。调节从 $V_{g\min}$ 至 $V_{g\max}$ 。

在整个变量范围内 (min-max) 先导压力升高 1 MPa。

变量起点的设定范围为 0.4—1.5 MPa。所需的控制油从高压回路取得，要求的最低工作压力为 4 MPa。若低于此值，需在油口 X2 通入 4 MPa 的先导压力。

先导口 X1 处的供油量约为 0.5 L/min。

Hydraulic Control, Pressure Related

The hydraulic control, pressure related, permits the stepless adjustment of the pump displacement in relation to pilot pressure. Adjustment is proportional to the pilot pressure at port X1. When using the Hd control ax 2-position control ($V_{g\min}$ to $V_{g\max}$), the pilot oil pressure on port X1 must not exceed 4 MPa. Adjustment is from $V_{g\min}$ to $V_{g\max}$. The increase in pilot pressure over the complete adjustment range (min-max) is 1 MPa.

The setting range for commencement of control is between 0.4 and 1.5 MPa. The necessary control oil is taken from the high pressure circuit, and a minimum operating pressure of 4 MPa is required. If necessary apply pilot pressure of 4 MPa at port X2. The oil flow at pilot X1 is approx 0.5 L/min.

附加功能：压力切断

用于 $V_{g\min}=0$ 的所有规格。

压力切断用来把流量限制成高压的函数，以便不超过设定的工作压力。此功能由顺序阀实现。达到设定的最高压力(调节范围达 31.5 MPa)时，该阀打开，流量自动减小(到 Q=0)。

顺序阀离开泵单独安装，借助于底板可装于任何适当的位置(遥控)。最大单管长度不大于 5m。顺序阀与底板须单独订货。


Additional Function: Pressure cut-Off

For all sizes with $V_{g\min}=0$.

The pressure cut-off serves to limit the flow as a function of the high pressure so that a predetermined operating pressure is not exceeded. This function is carried out by a sequence valve. On reaching the set maximum pressure (adjustment range up to 31.5 MPa), the valve opens and the flow is automatically reduced (to Q=0).

The sequence valve is mounted separately from the pump in any suitable location by means of a subplate (remote control). The max. Single pipe length should not exceed 5m.

Order sequence valve and subplate separately.

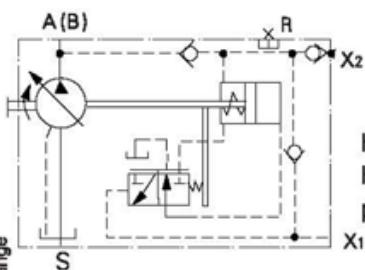

HD 液控变量 Hydraulic control, pressure related, HD

Hydraulic Control, pressure related, HD with pressure cut-off


注意: 顺序阀油口 T 必须单独通油箱

在零位连续工作 详见 DR 恒压变量。

Important: port T from the sequence valve must be piped separately to tank.

Continuous Operations is Zero position

For details see constant pressure control DR.

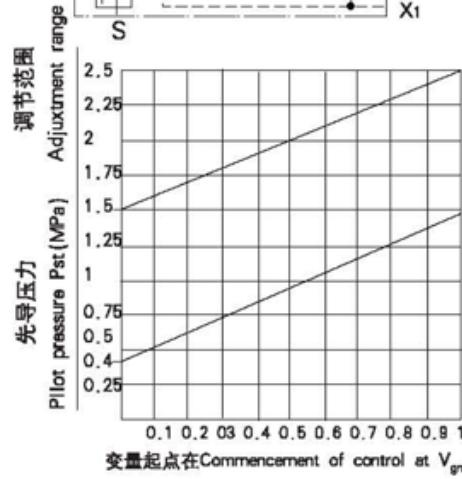

接口

- A,B 工作油口 service lines
- S. 吸油口 suction line
- X₁ 先导压力油口 pilot pressure
- X₂ 通控压力油口 remote control pressure
- A₁,X₃, 遥控阀油口 ports for remote control valve
- R. 排气口 air bleed

Connections

- service lines
- suction line
- pilot pressure
- remote control pressure
- ports for remote control valve
- air bleed


A7V变量泵 Variable Displacement Pump A7V

SC 刹车变量


用于刹车系统，当系统压力达到一定值后($P_x \geq 4\text{ MPa}$)，立刻使泵达到大摆角，即大流量，大扭矩。

Brake Control

When operating pressure goes up to the setting pressure ($\geq 4\text{ MPa}$)，the flow is max, and the torque is max.

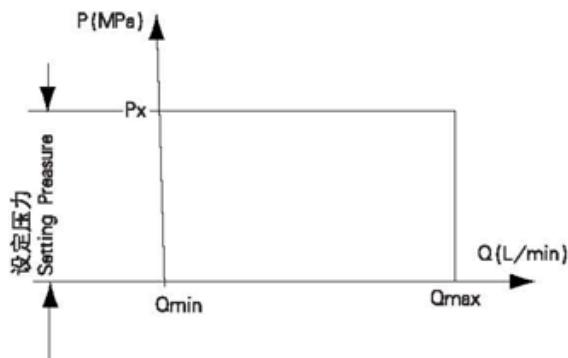

SC的P-Q特性曲线 Characteristics

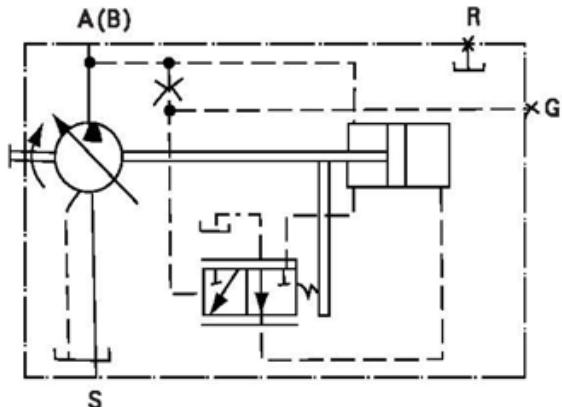

SC刹车变量
Brake control.SC

NC 数字变量

用步进电机来驱动泵变量，可通过控制装置随意设定工作曲线。(如LV, DR, EP等)


调节时间不大于3秒。

Numerical Control

Varied displacement is driven by electric stepping motor.

The working curve is set optionally by control apparatus.
(i.e.LV.DR.EP.etc.)

Adjustment time is not longer than 3s.

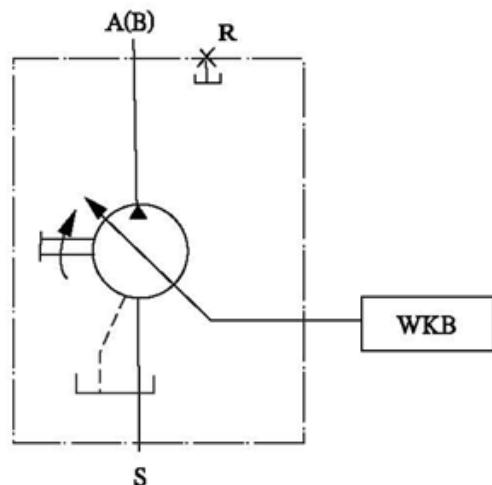


NC 数字变量
Numerical control.NC


A7V变量泵 Variable Displacement Pump A7V

元件尺寸 Unit dimensions 规格 Size 20-160

LV:恒功率控制 Constant HP Control

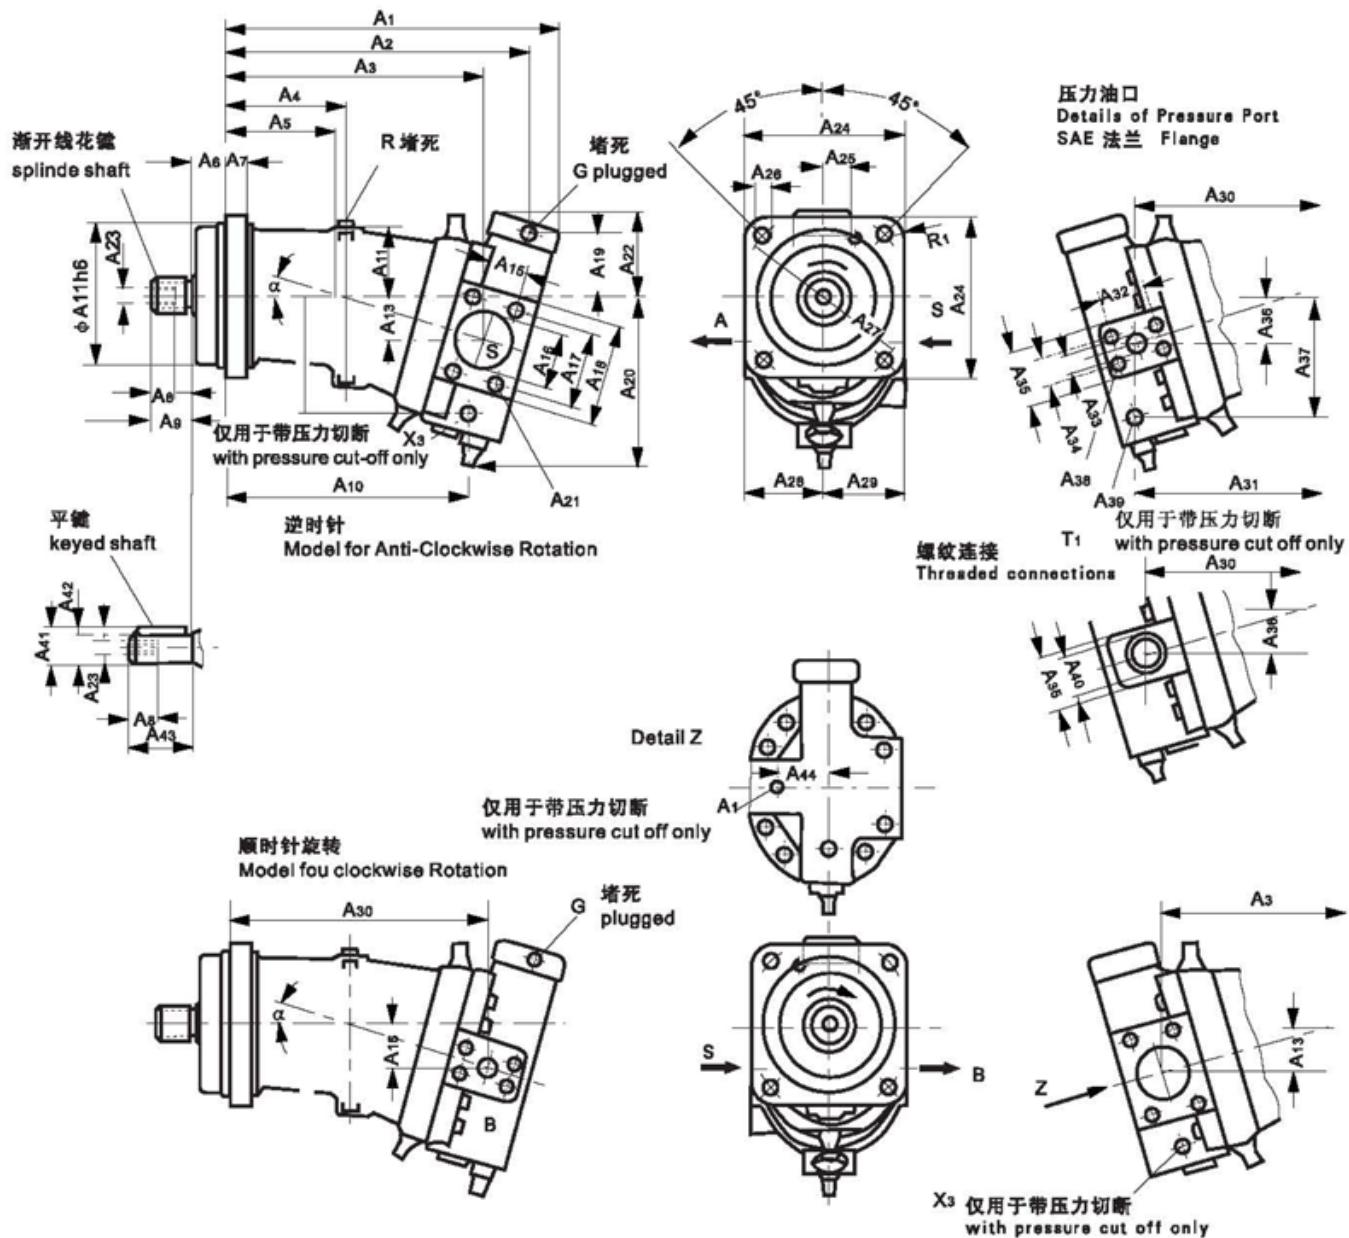

A7V变量泵 Variable Displacement Pump A7V

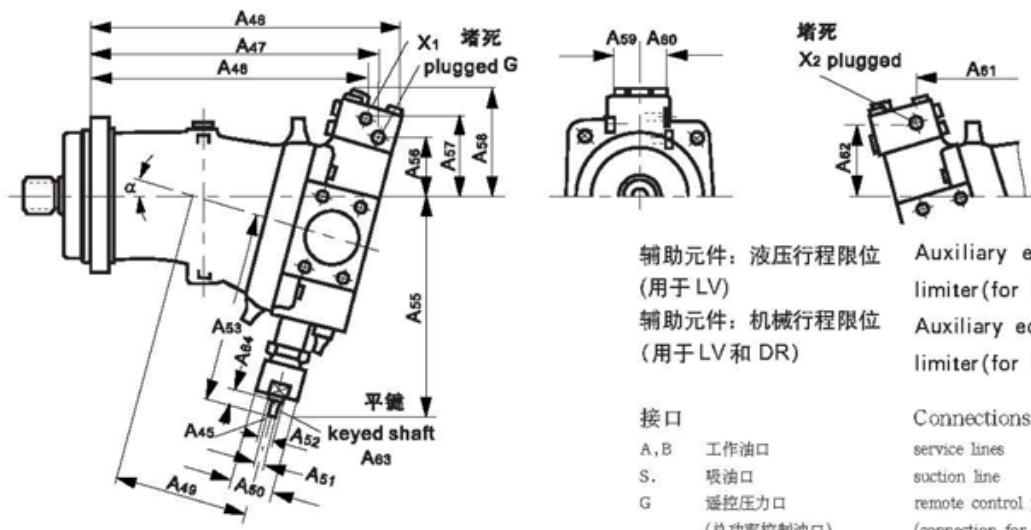

辅助元件: 液压行程限位
(用于 LV)

辅助元件: 机械行程限位
(用于 LV 和 DR)

Auxiliary equipment: hydraulic stroke limiter(for LV)

Auxiliary equipment: mechanical stroke limiter(for LV-and DR)

接口

A, B	工作油口	service lines
S.	吸油口	suction line
G	遥控压力口	remote control pressure M14 × 1.5
	(总功率控制油口)	(connection for summation HP control)
X ₁	先导压力油口	pilot pressure M14 × 1.5
X ₂	遥控压力口(HD)	remote control pressure(HD) M14 × 1.5
A ₁ , X ₃	遥控阀油口	ports for remote control valve
T	先导油回油口	pilot oil return line M12 × 1.5
T ₁	先导油回油口	pilot oil return line
R.	排气口	air bleed

Connections

A, B	工作油口	service lines
S.	吸油口	suction line
G	遥控压力口	remote control pressure M14 × 1.5
	(总功率控制油口)	(connection for summation HP control)
X ₁	先导压力油口	pilot pressure M14 × 1.5
X ₂	遥控压力口(HD)	remote control pressure(HD) M14 × 1.5
A ₁ , X ₃	遥控阀油口	ports for remote control valve
T	先导油回油口	pilot oil return line M12 × 1.5
T ₁	先导油回油口	pilot oil return line
R.	排气口	air bleed

规格

Size	a	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆	A ₇	A ₈	A ₉	A ₁₀	A ₁₁	A ₁₂	A ₁₃	A ₁₄	A ₁₅	A ₁₆	A ₁₇	A ₁₈	A ₁₉	A ₂₀	A ₂₁	深						
20	9	251	224	199	107	75	25	16	19	43	160	100	85	20	52	35.7	38	69.9	94	78	132	M12	20	95	M8	118	23.5	11	125
28	16	260	232	195	107	75	25	16	19	43	149	100	95	34	50	37.5	38	69.9	94	59	145	M12	20	80	M8	118	23.5	11	125
40	9	317	287	255	123	108	32	20	28	35	244	125	95	23	63	42.9	50	77.8	102	87	166	M12	20	109	M12	150	29	13.5	160
55	16	327	296	251	123	108	32	20	28	35	—	125	—	41	63	42.9	50	77.8	102	64	182	M12	20	91	M12	150	29	13.5	160
58	9	374	337	304	152	137	32	23	28	40	295	140	106	26.5	77	50.8	63	88.9	115	93	168	M12	20	113	M12	165	33	13.5	180
80	16	385	347	300	152	137	32	23	28	40	—	140	—	48	77	50.8	63	88.9	115	68	194	M12	20	120	M12	165	33	13.5	180
78	9	381	347	310	145	130	40	25	28	45	298	160	113	29	80	50.8	63	88.9	115	101	180	M12	20	120	M12	190	33	17.5	200
107	16	393	358	305	145	130	40	25	28	45	—	160	—	50	80	50.8	63	88.9	115	73	200	M12	20	98	M12	190	33	17.5	200
117	9	443	402	364	214	156	40	28	36	50	350	180	130	33	93	61.9	75	106.4	135	114	195	M16	24	137	M16	210	34	17.5	224
160	16	454	414	359	213	156	40	28	36	50	—	180	—	58	88	61.9	75	106.4	135	83	222	M16	21	112	M16	210	34	17.5	224

规格

Size	A ₂₈	A ₂₉	A ₃₀	A ₃₁	A ₃₂	A ₃₃	A ₃₄	A ₃₅	A ₃₆	A ₃₇	A ₃₈	deep	深 (T1)				深										
													A ₃₉	A ₄₀	A ₄₁	A ₄₂	A ₄₃	A ₄₄	deep	A ₄₆	A ₄₇	A ₄₈	A ₄₉	A ₅₀	A ₅₁	A ₅₂	
20	58	58	193	—	50.8	19	23.8	46	19	—	M10	17	—	M27 × 2	27.9	25	50	38	M3	9	257	226	230	108	42	8.8	8
28	58	58	189	—	50.8	19	23.8	46	33	—	M10	17	—	M27 × 2	27.9	25	50	38	M3	9	269	234	2420	108	42	8.8	8
40	71	81	253	261	50.8	19	23.8	53	23	98	M10	17	M18 × 1.5	M33 × 2	32.9	30	60	40	M4	10	323	290	279	134	—	11.2	10
55	71	81	249	—	50.8	19	23.8	53	40	—	M10	17	—	M33 × 2	32.9	30	60	40	M4	10	337	299	292	134	—	11.2	10
58	86	92	301	313	57.2	25	27.8	64	26	109	M12	18	M18 × 1.5	M42 × 2	38	35	70	62	M5	12	378	344	330	155.5	52	18	16
80	86	92	297	—	57.2	25	27.8	64	47	—	M12	18	—	M42 × 2	38	35	70	62	M5	12	391	354	343	155.5	52	18	16
78	89	93	306	318	57.2	25	27.8	64	28	119	M12	18	M18 × 1.5	M42 × 2	43.1	40	80	55	M5	12	385	342	338	169	52	18	16
107	89	93	301	—	57.2	25	27.8	64	19	—	M12	18	—	M42 × 2	43.1	40	80	55	M5	12	400	363	351	169	52	18	16
117	104	113	359	369	66.7	32	31.8	70	32	136	M14	19	M18 × 1.5	M45 × 2	48.5	45	90	65	M5	12.5	445	408	384	192	65	18	16
160	104	113	354	—	66.7	32	31.8	70	57	—	M14	19	—	M48 × 2	48.5	45	90	65	M5	12.5	461	420	399	192	65	18	16

规格

size	A ₃₁	A ₃₄	A ₃₅	A ₃₆	A ₃₇	A ₃₈	A ₃₉	A ₄₀	A ₄₁	A ₄₂	A ₄₃	A ₄₄	A ₄₅	A ₄₆	Connection	A ₄₇	A ₄₈	A ₄₉	A ₅₀	A ₅₁	重量				
20	161	14	176	77	104	129	35	30	228	92	键2 × 10	键8 × 40	W25 × 1.25 × 18 × 9g	EXT18Z × 1.25m × 30R × 5f	12	M16 × 1.5	M12 × 1.5	19							
28	161	14	186	58	84	144	35	30	238	73	键2 × 10	键8 × 40	W25 × 1.25 × 18 × 9g	EXT18Z × 1.25m × 30R × 5f	12	M16 × 1.5	M12 × 1.5	19							
40	184	16	204	85	117	147	30	30	276	104	键3 × 10	键8 × 50	W30 × 2 × 14 × 9g	EXT14Z × 2m × 30R × 5f	12	M16 × 1.5	M12 × 1.5	28							
55	184	16	215	62	98	128	30	30	288	83	键3 × 10	键8 × 50	W30 × 2 × 14 × 9g	EXT14Z × 2m × 30R × 5f	12	M18 × 1.5	M12 × 1.5	2							


A7V 变量泵 Variable Displacement Pump A7V

DR 恒压变量 Constant Pressure Control

标准型 Standard Model

遥控 Remote Control

Z 向 Detail z

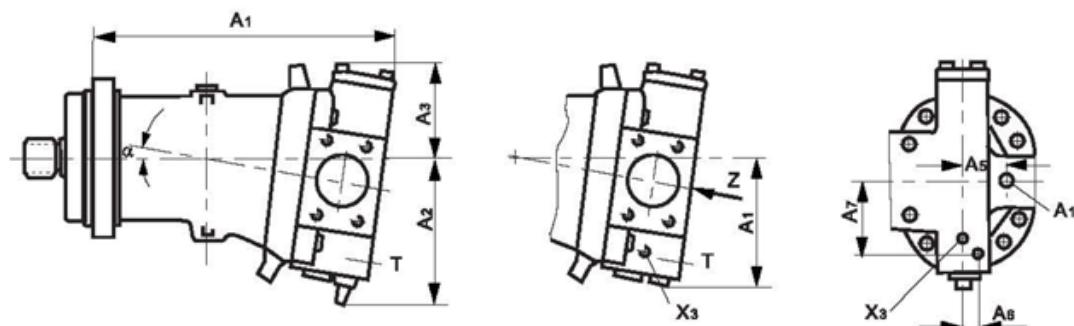

A1 和 X3 仅用于遥控 A1 and X3 only for remote control

其余尺寸见 LV. Other dimensions see LV.

T1:M12 × 1.5

规格


Size	a	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆	A ₇
20	9°	251	134	95	106	38	—	—
40	9°	315	166	107	127	40	14	53
58	9°	372	160	107	138	62	15	69
78	9°	380	180	114	147	60	14	70
117	9°	441	199	132	165	65	14	83

HD 液控变量 Hydraulic Control, Pressure Related

规格

Size	a	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆	A ₇
20	9°	248	175	132	182	75	190	147
28	16°	253	158	143	195	75	172	160
40	9°	312	236	151	206	110	233	166
55	16°	318	217	166	220	84	212	180
58	9°	367	287	158	213	110	285	170
80	16°	373	266	175	232	105	263	186
78	9°	375	292	170	225	122	290	182
107	16°	382	270	188	245	106	266	200
117	9°	434	333	188	250	132	331	200
160	16°	442	308	209	272	114	305	220

其余尺寸见 LV Other dimensions see LV.

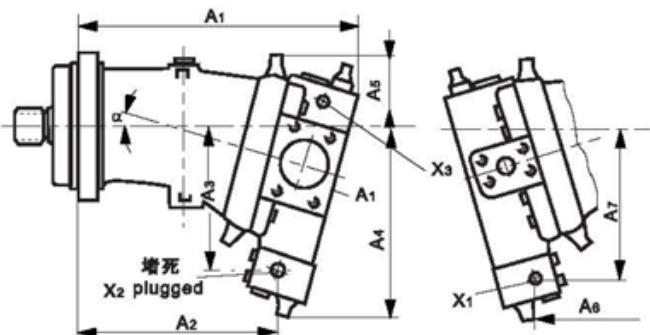

A₁ 和 X₃ 仅用于带压力切断 A₁ and X₃ with pressure cut-off only


EP 电控比例变量 electric Proportional Control

规格

Size	a	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆	A ₇
20	9°	248	182	144	113	54	216	75
28	16°	252	188	130	121	41	229	75
40	9°	312	267	201	130	49	234	110
55	16°	318	217	184	140	29	249	84
58	9°	367	320	249	141	52	245	110
80	16°	373	325	231	154	29	264	105
78	9°	374	325	254	153	55	257	122
107	16°	381	330	234	167	31	277	106
117	9°	434	381	294	172	64	279	132
160	16°	442	387	272	187	36	298	114

其余尺寸见 LV Other dimensions see LV.

标准型 Standard Model

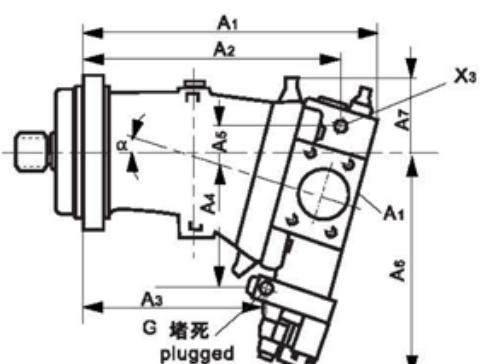

A₁ 和 X₃ 仅用于带压力切断 A₁ and X₃ with pressure cut-off only

A7V 变量泵 Variable Displacement Pump A7V


MA 手动变量 Manual Control

手动朝下 handwheel downwards

规格 Size	a	A ₁	A ₂	A ₃	A ₄
20	9°	251	108	175	95
28	16°	260	108	190	80
40	9°	315	134	197	108
55	16°	323	134	215	89
58	9°	327	155.5	215	107
80	16°	380	155.5	235	86
78	9°	380	169	246	144
107	16°	390	169	270	92
117	9°	441	192	261	132
160	16°	450	192	285	107

手动朝上 handwheel upwards

规格 Size	a	A ₁	A ₂	B ₁	B ₂
20	9°	—	—	—	—
28	16°	—	—	—	—
40	9°	317	100	175	132.5
58	9°	—	—	—	—
80	16°	—	—	—	—
78	9°	315	1000	180	157.5
107	16°	383	100	270.5	132.5
117	19°	—	—	—	—
160	16°	445	100	225	143
250	26.5	584	120	320	230

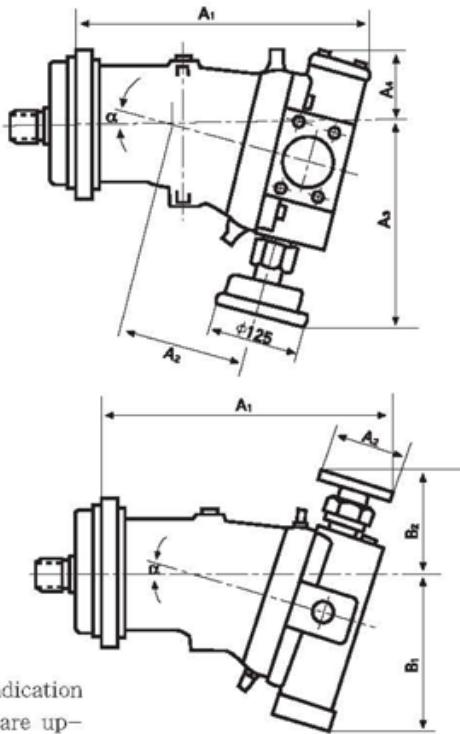


注: 手轮朝上或朝下。
订货时请说明。

Please give clear indication
of the handwheels are up-
wards or downwards, when
you order goods!

NC 数字变量 Numerical Control


规格 Size	a	A ₁	B ₁	B ₂
107	16°	419	225.5	224.5

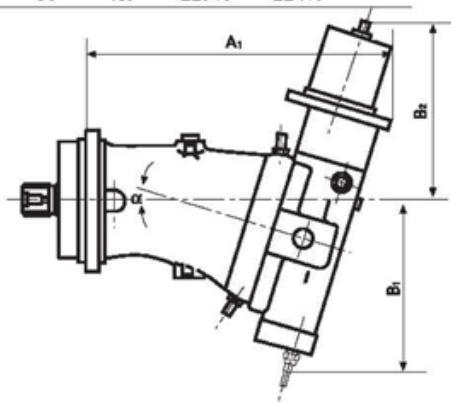

LVS 恒 功率负荷传感变量

Constant HP Control with Load Sensing


规格 Size	a	A ₁	B ₁	B ₂
117	9°	443	215	137

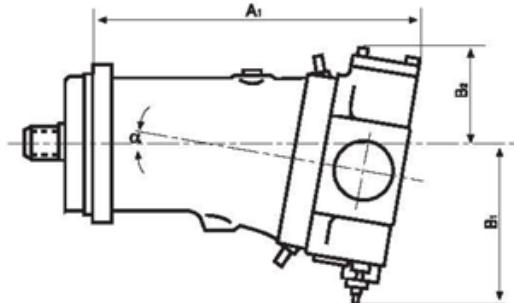

DRS 恒压负荷传感变量


Constant Pressure Control with Load Sensing SC

规格 Size	a	A ₁	B ₁	B ₂
117	9°	441	214	132

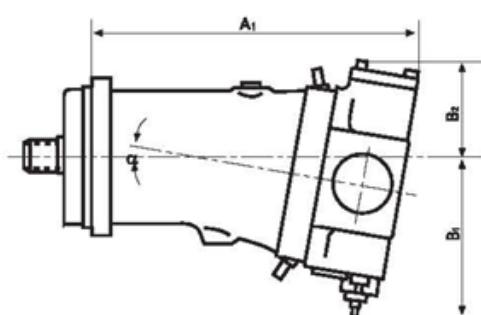

SC 刹车变量 Brake Control




规格 Size	a	A ₁	B ₁	B ₂
160	16°	441	230	98

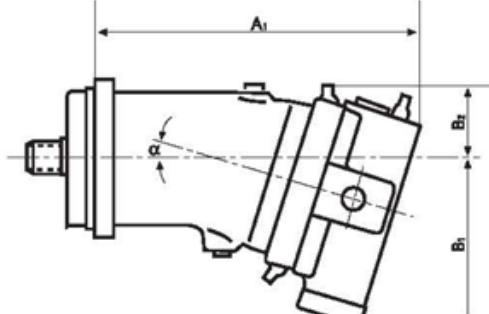


A7V 变量泵 Variable Displacement Pump A7V

元件尺寸 Unit dimensions 规格 Size-250

LV 恒功率变量泵 Constant HP control




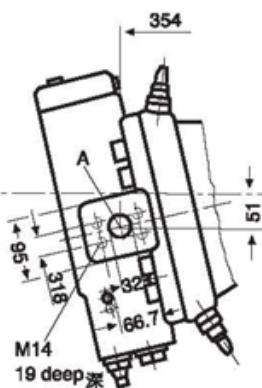
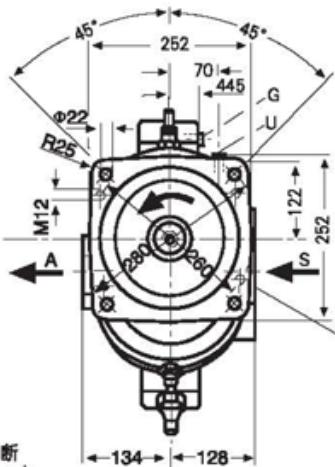
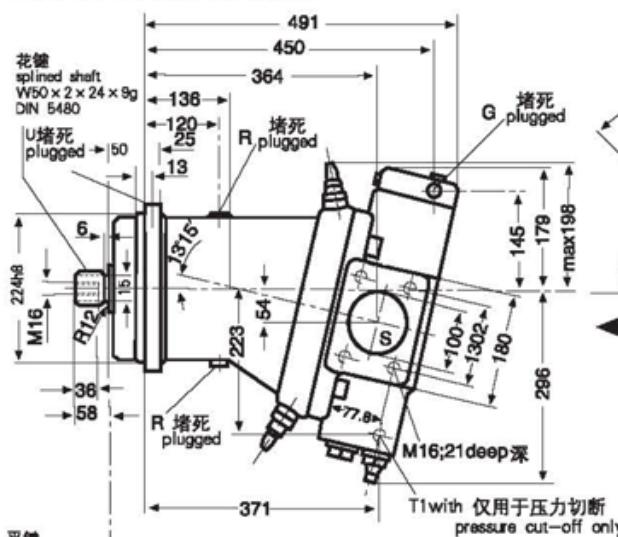


带压力切断 With Pressure Cut-Off



逆时针旋转
Model for Anti-Clockwise Rotation

顺时针旋转
Model for Clockwise Rotation

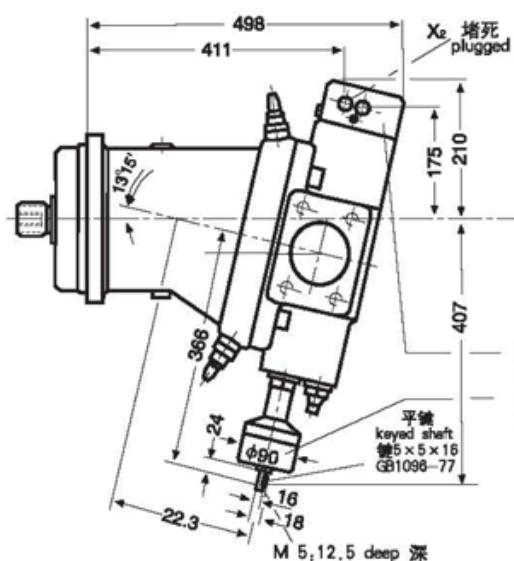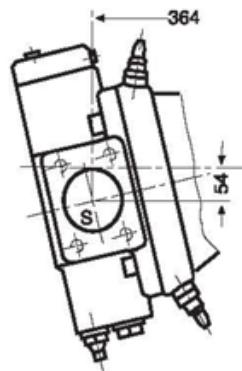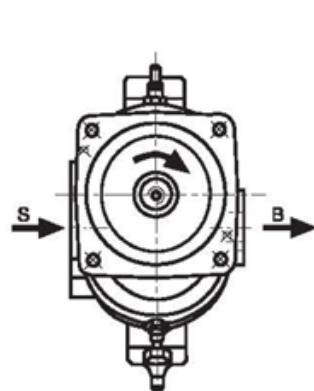


辅助元件：液压行程限位 (用于LV)
Auxiliary equipment: hydraulic stroke limiter (for LV)
辅助元件：机械行程限位 (用于LV和DR)
auxiliary equipment: mechanical stroke limiter (for LV and DR)

重量, 规格250: 约105公斤
Weight, size 250, approx. 105kg


A7V 变量泵 Variable Displacement Pump A7V

DR 恒压变量 Constant Pressure Control

标准型 Standard Model

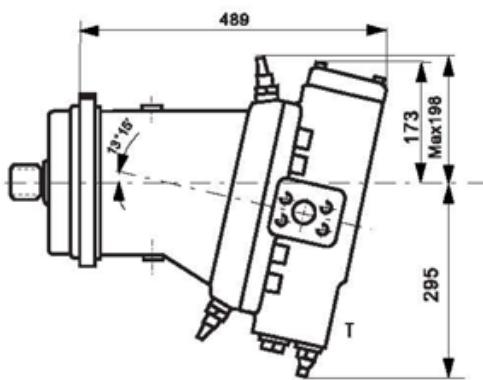

EP 电控变量 Electric Control

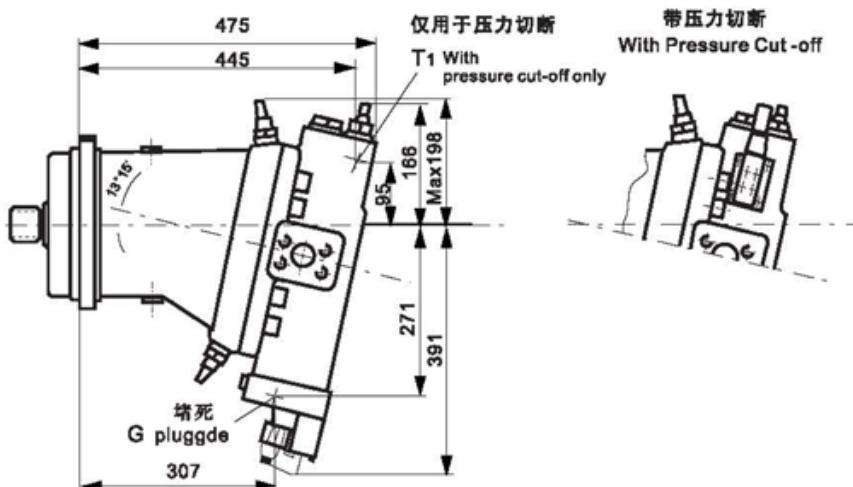


仅用于压力切断
T1 With pressure cut-off only

带压力切断
With Pressure Cut-off

A1 and X3 only for remote control

A1和X3仅限于遥控

HD 液控变量 Hydraulic Control, Pressure Related

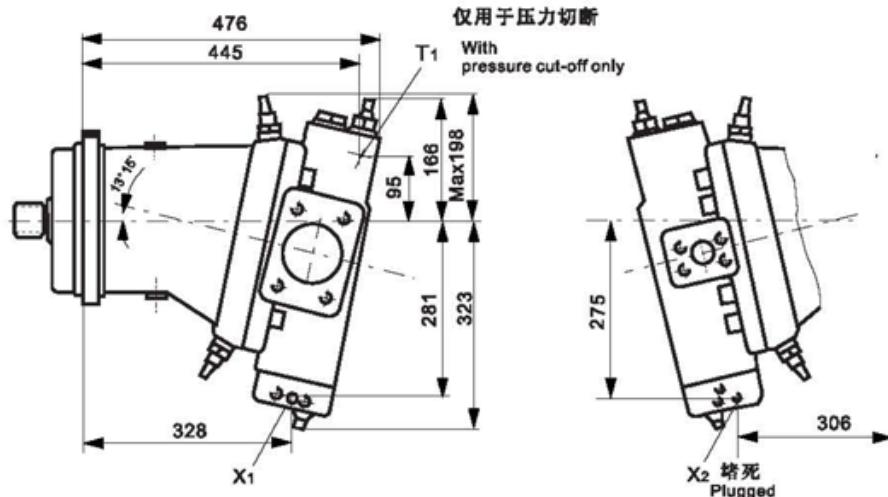

仅用于压力切断
T1 With pressure cut-off only

带压力切断
With pressure cut-off only

A, B 压力油口 service lines

X₁ 先导压力口 pilot pressure M14 × 1.5

S 吸油口 suction line

X₂ 遥控压力口 remote control pressure(HD) M14 × 1.5

G 遥控压力口 remote control pressure M14 × 1.5

T 先导油回油口 pilot oil return line M16 × 1.5

(总功率控制油口) (connection for summation HP control)

T₁ 先导油回油口 pilot oil return line M22 × 1.5

A₁, X₃ 遥控阀油口 ports for remote control valve M16 × 1.5


R. 排气口 air bleed M22 × 2

U 冲洗口 flushing port M14 × 1.5

A7V 变量泵 Variable Displacement Pump A7V

元件尺寸 Unit dimensions 规格 Size-355


LV 恒功率变量 Constant HP control

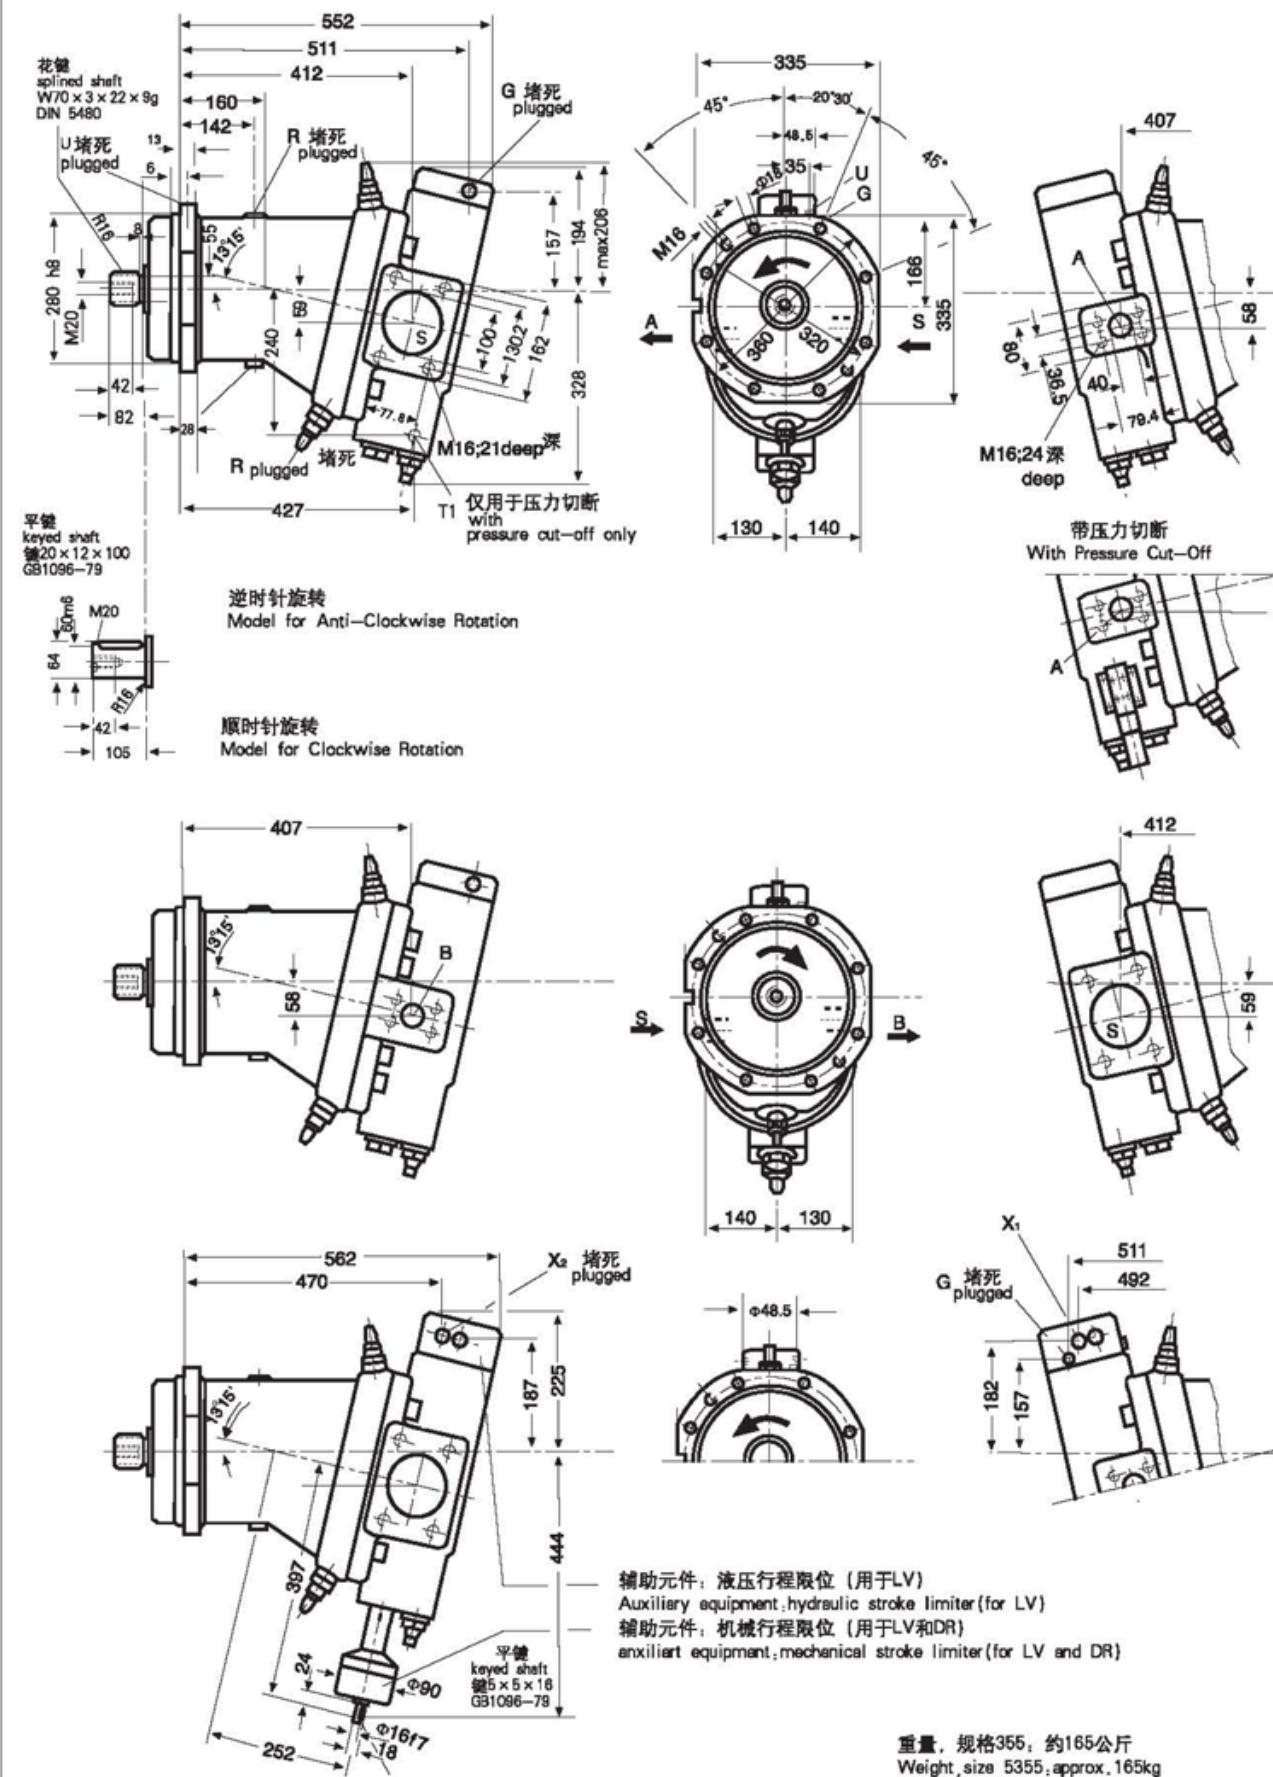


A7V 变量泵 Variable Displacement Pump A7V

DR 恒压变量 Constant Pressure Control


标准型 Standard Model

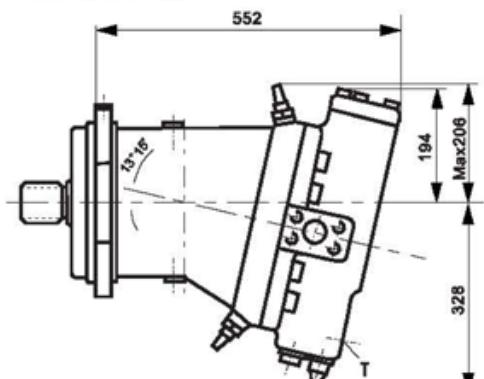


EP 电控变量 Electric Control

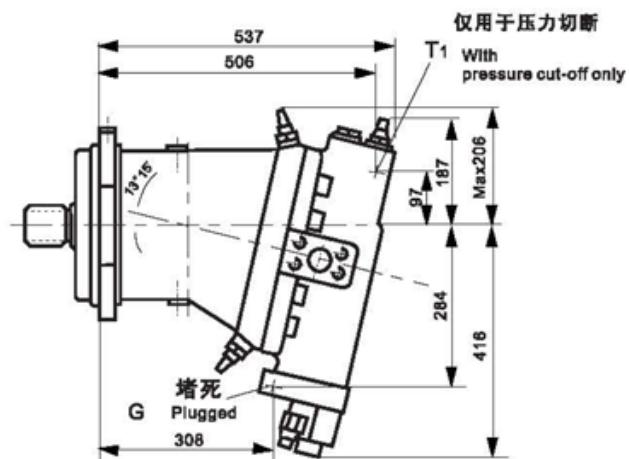

遥控 Remote Control

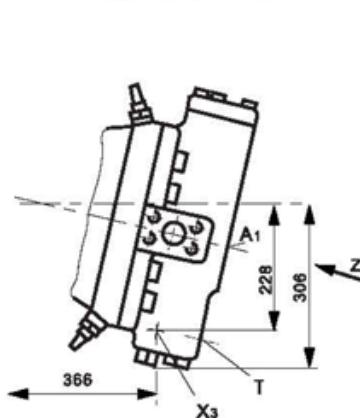


Z 向 Detail z




A1 和 X3 仅限于遥控
A1 and X3 only for remote control


带压力切断 With Pressure Cut-off



HD 液控变量 Hydraulic Control, Pressure Related

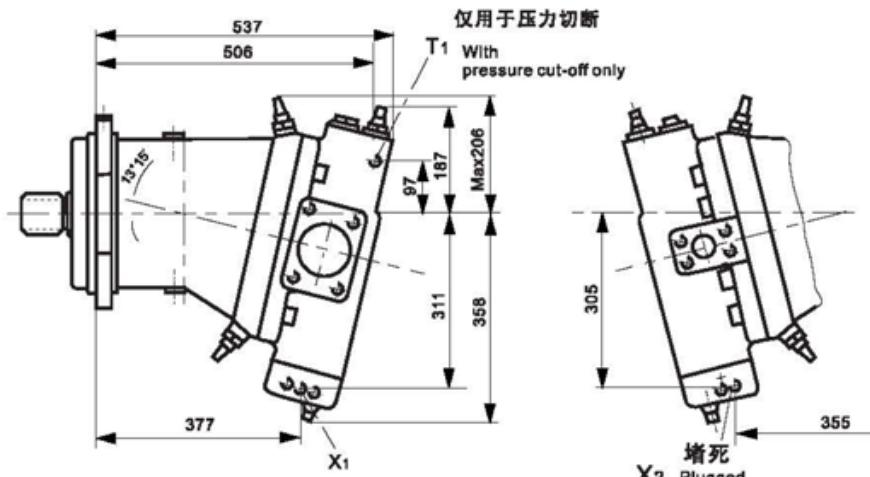

仅用于压力切断
With pressure cut-off only



A, B 压力油口 service lines

S 吸油口 suction line

G 遥控压力口 remote control pressure M16 × 1.5

(总功率控制油口) (connection for summation HP control)

X₁ 先导压力口 pilot pressure M16 × 1.5

X₂ 遥控压力口 remote control pressure(HD) M16 × 1.5

A₁, X₃ 遥控阀油口 ports for remote control valve M22 × 1.5

T 先导油回油口 pilot oil return line M16 × 1.5

T₁ 先导油回油口 pilot oil return line M22 × 1.5


R 排气口 air bleed M33 × 2

U 冲洗口 flushing port M14 × 1.5

A7V 变量泵 Variable Displacement Pump A7V

元件尺寸 Unit dimensions 规格 Size-500

LV 恒功率变量 Constant HP control

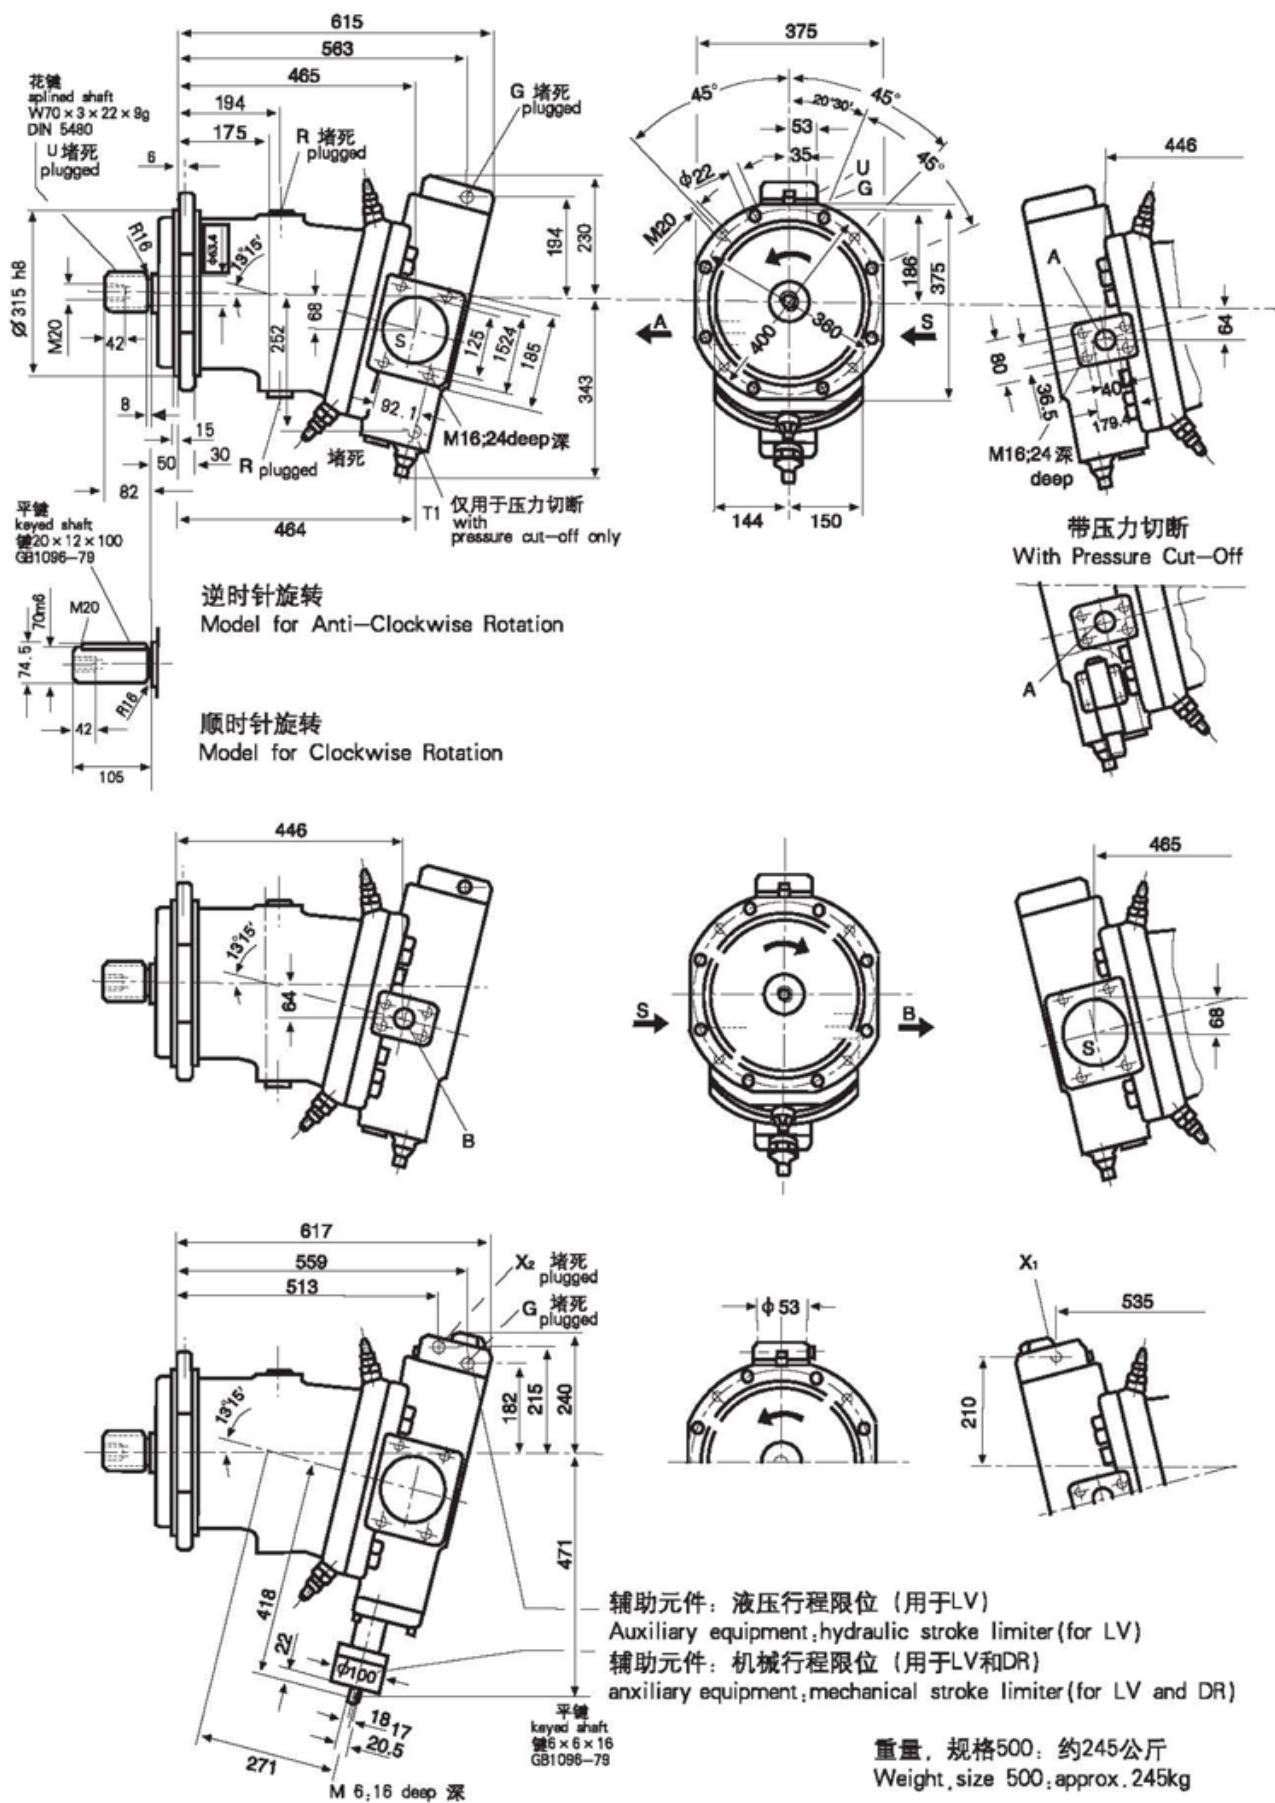


A7V 变量泵 Variable Displacement Pump A7V

DR 恒压变量 Constant Pressure Control



标准型 Standard Model

遥控 Remote Control


Z 向 Detail z

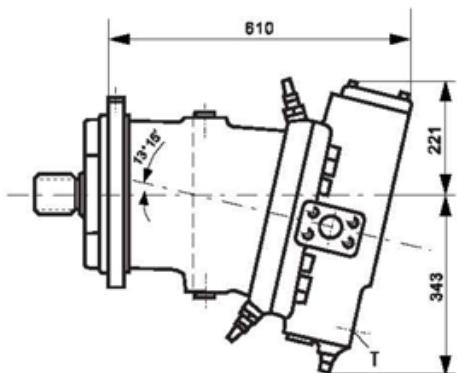

Ep 电控变量 Electric Control

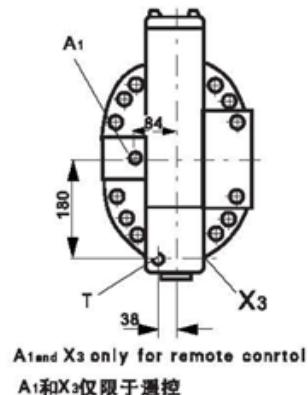


A1 and X3 only for remote control
A1和X3仅限于遥控

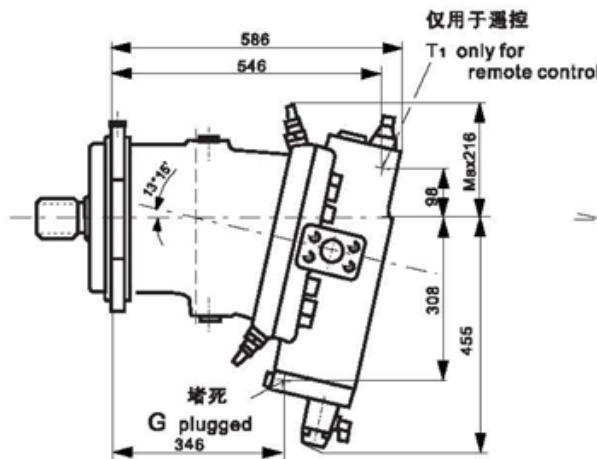

仅用于遥控
With Pressure Cut-off



Hp 液控变量 Hydraulic Control, Pressure Related

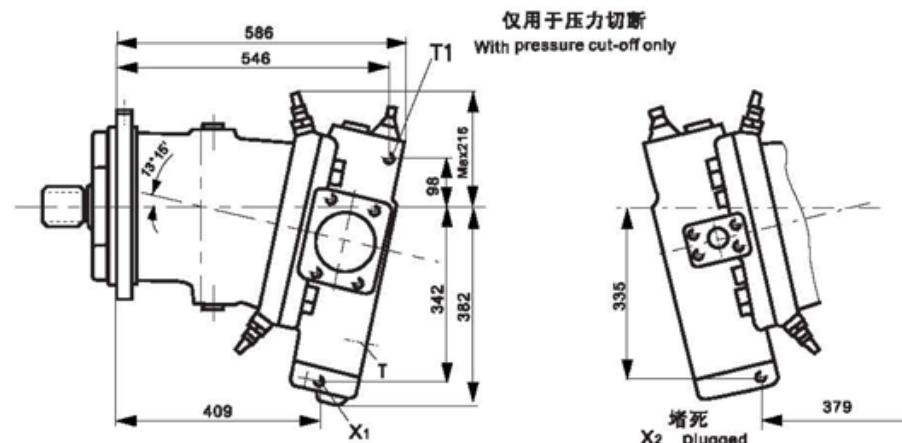

仅用于压力切断
With pressure cut-off only

带压力断切
With Pressure Cut-Off



A,B 压力油口 service lines

S 吸油口 suction line

G 遥控压力口 remote control pressure

(总功率控制油口) (connection for summation HP control)

M16 × 1.5

X₁ 先导压力口 pilot pressure M16 × 1.5

X₂ 遥控压力口 remote control pressure(HD) M16 × 1.5

A₁,X₃ 遥控阀油口 ports for remote control valve M22 × 1.5

T 先导油回油口 pilot oil return line M16 × 1.5

T₁ 先导油回油口 pilot oil return line M22 × 1.5

R 排气口 air bleed M33 × 2

U 冲洗口 flushing port M14 × 1.5

ANNOTATIONS :

HUADE AMÉRICA

CEP : 03162-020

RUA HIPÓDROMO 1445 – MOOCA, SÃO PAULO, SP, BRASIL

TEL : (11) 3186-5959

huade@huade.com.br

www.huade.com.br