





Catálogo de Productos

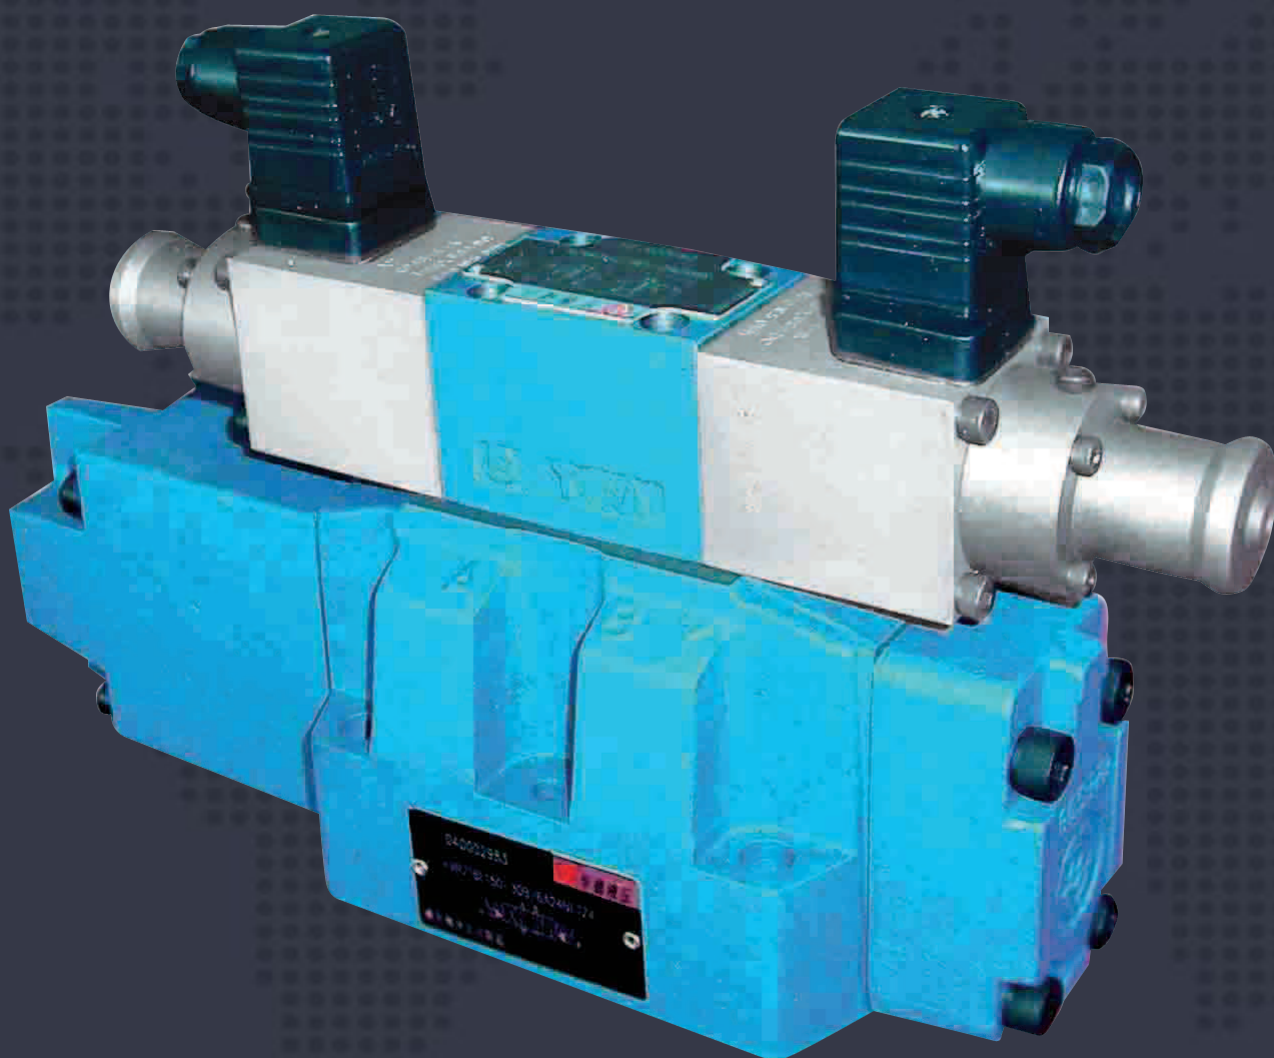

Proportional Directional Valves pilot operated type 4WRZ,
external pilot operated type 4WRH

Features:

- Pilot (WRZ) and direction (WRH) proportional valve
- For subplate mounting
- For the control of both direction and flow rate of a hydraulic fluid
- Spring centred ,no spool drift
- Low pressure drop across control lands
- Valve and electronic control from one source
- Proportional solenoid operation
- Porting pattern to DIN 24 340 form A,ISO4401 and CETOP-RP121H.




Function,section

Valve types 4WRZ... are 4- way valves operated by means of proportional solenoids.They control the direction and flow rate of hydraulic fluid.

They basically consist of the pilot valve (3),the main valve (7) with the main spool (8),and the centering spring (9). If solenoid "B" is energised, pilot spool (4) is moved to the right.Pilot oil is then either fed internally from port P,or "externally" from port X via the pilot valve (3) into the pressure chamber (10) and moves the main spool (8) a distance proportional to the strength of the electrical current.The throttling grooves in the main spool open progressively with increasing current, thus controlling the flow of hydraulic fluid to the actuator ports.


When the electrical signal is switched off, both the pilot spool (4) ,and the main spool (8) return to neutral independent of the control pressure supply.An emergency hand operator permits movement of the pilot spool position without energising the solenoids.

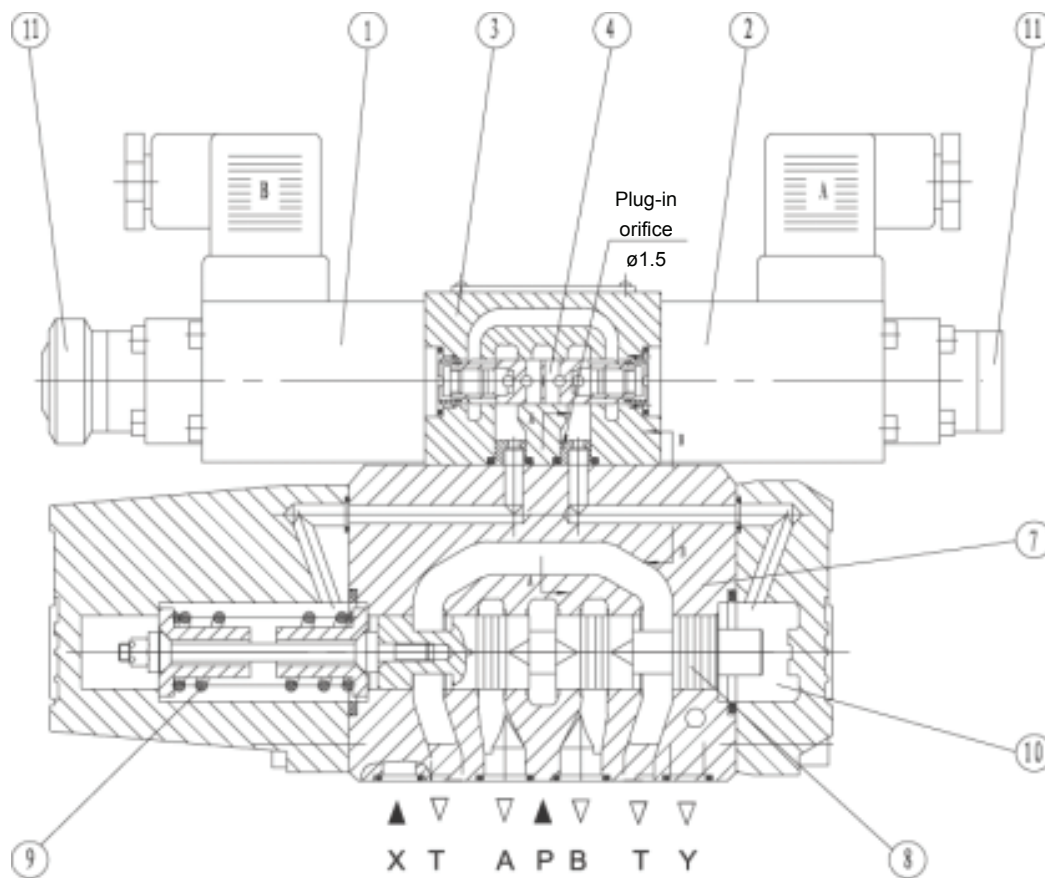

Proportional valve of type 4WRZ

Type 4WRH:


The type 4WRH valves are pilot operated proportional directional valves for external operation via pressure control valves. The function and principle is the same as that for valve type 4WRA. The inter-connecting plate (12) connects the pilot connection A with connection T(Y) and pilot connection B with P(X). The pilot pressure at the main valve must be from 0.4 MPa to 2.5 MPa, so flow is either from P to A and B to T or P to B and A to T.

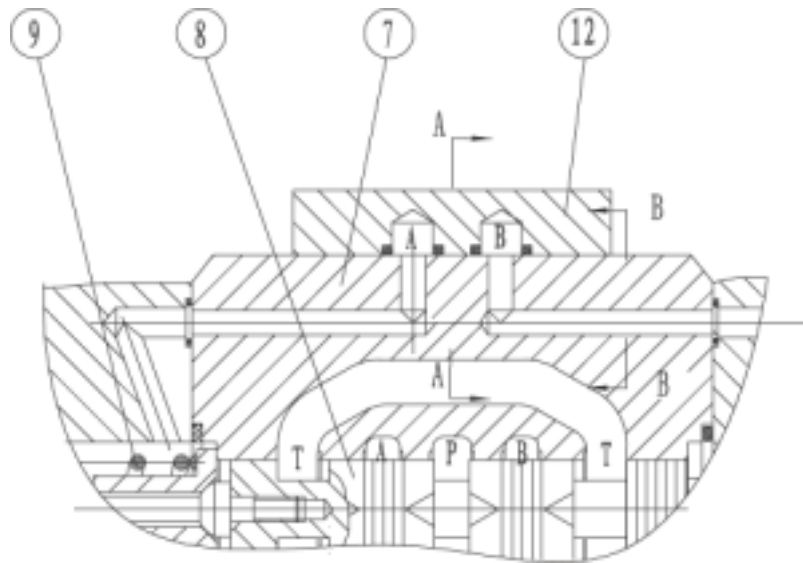

proportional valve of type 4WRH

Pilot valve:

The pilot valve is a proportional solenoid operated 3-way pressure reducing valve (type 3DREP6). Throttle inserts are installed in port A and B, further details see the text of 3DREP6.

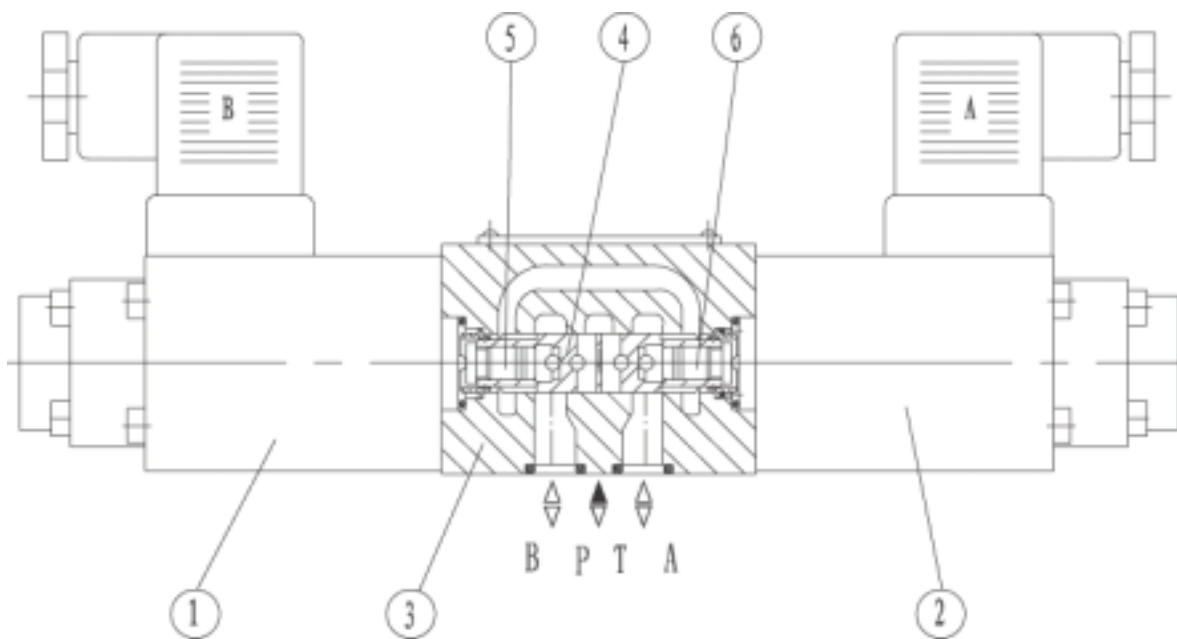


Pilot valve type 3DREP6

- 1、 Pilot oil feed , external ; drain , external。

On this model,the pilot oil feed via the port "X" , return is not directed into the T-port of main valve, but is led separately via port Y to tank(externaily)


- 13、 Plug M6

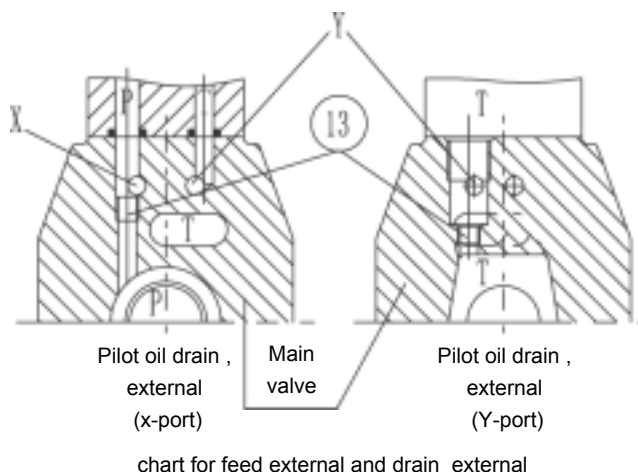

- 2、 Pilot oil feed , internal ; drain , external。


On this model,the pilot oil inlet is supplied from the P-port of the main valve(internaliy).The polit oil return is not directed into the T-port of main valve, but is led separately via port Y to tank(externaily)

- 13、 Plug M6

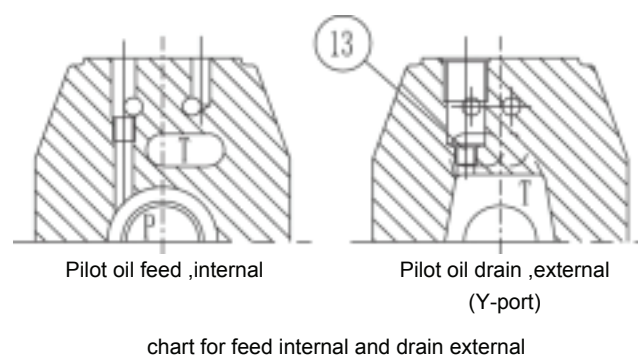

- 3、 Pilot oil feed , internal ; drain , internal。


On this model,the pilot oil inlet is supplied from the P-port of the main valve(internaliy).The polit oil return is taken directly into the T-port of the main valve (internaliy).Ports "X" and "Y" in the subplate are both plugged.

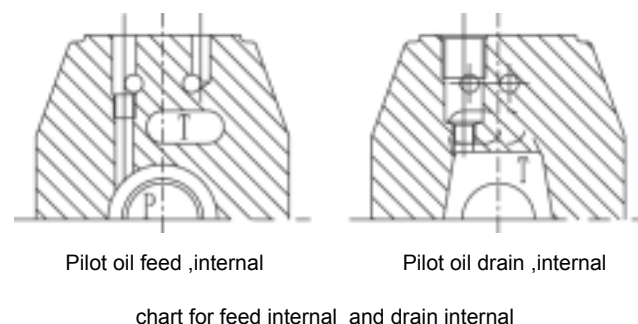


- 4、 Pilot oil feed , external ; drain , internal。

On this model,the pilot oil inlet is feed from port "X", The polit oil return is taken directly into the T-port of the main valve (internaliy).Port "Y" in the subplate is plugged.


- 13、 Plug M6

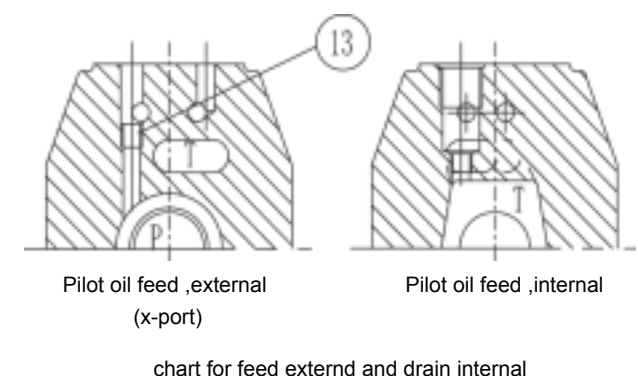

Symbols(simplified)

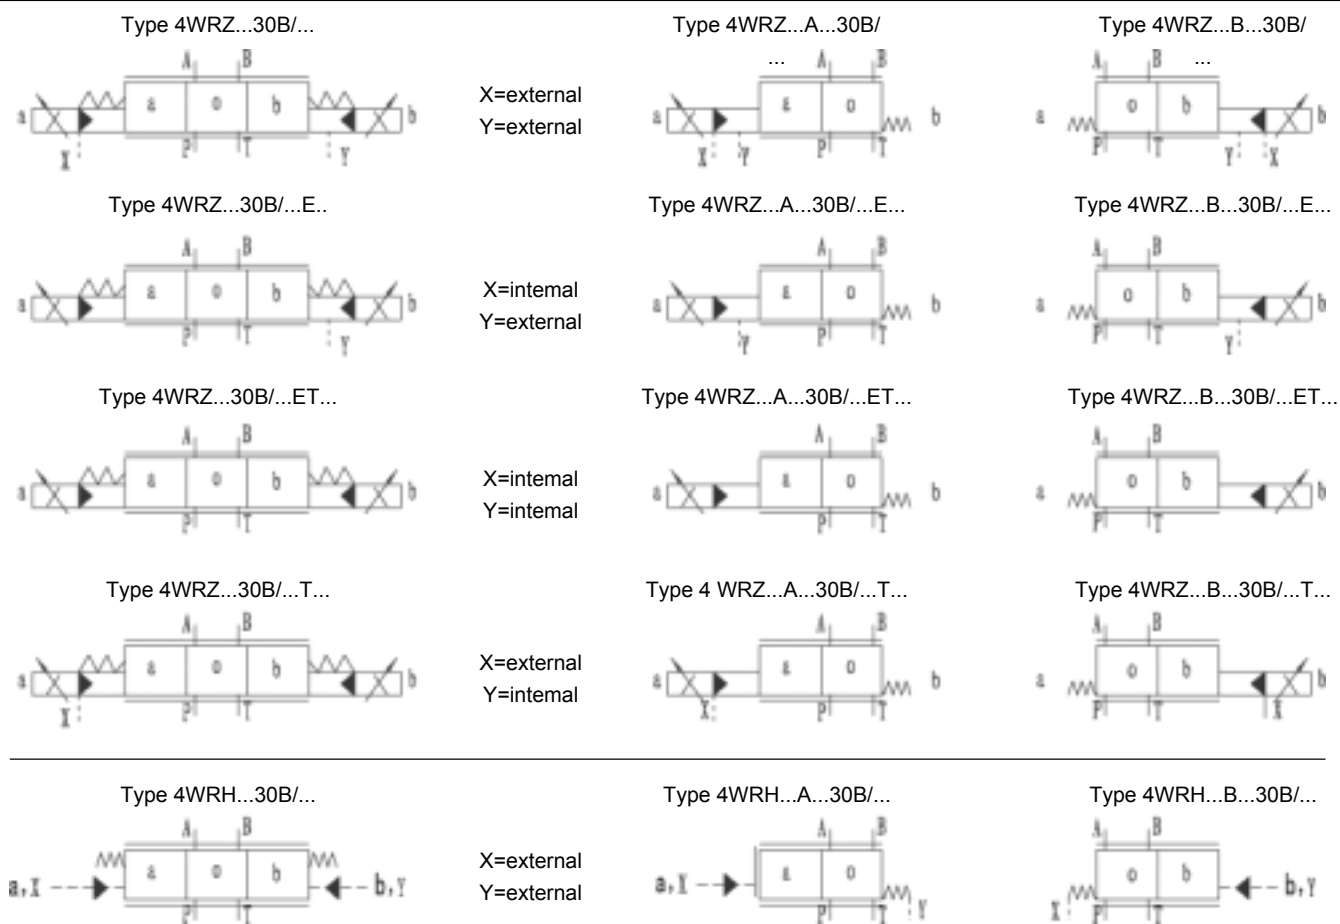


Symbols(detailed):

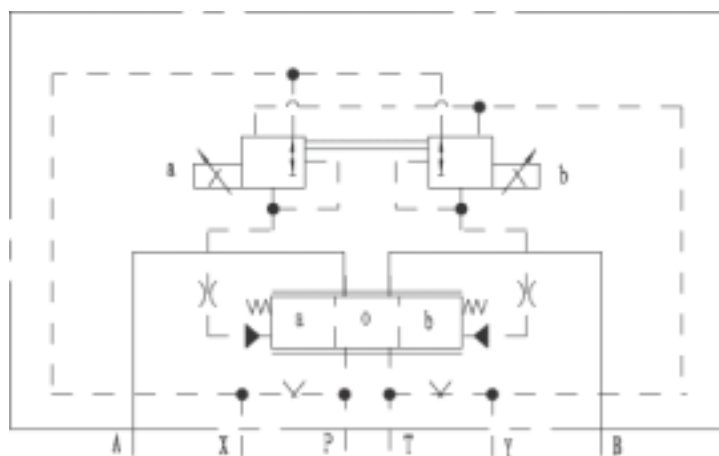


Example: 4WRZ...
Polit oil feed,external
polit oil drain,external

Electrical Connection:

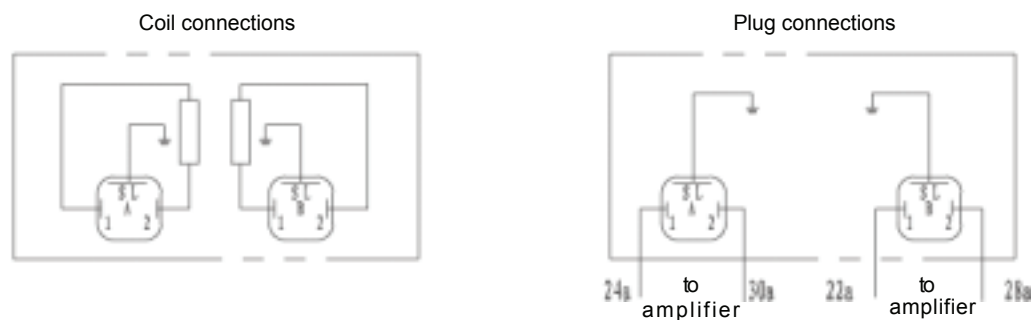

Ordering code

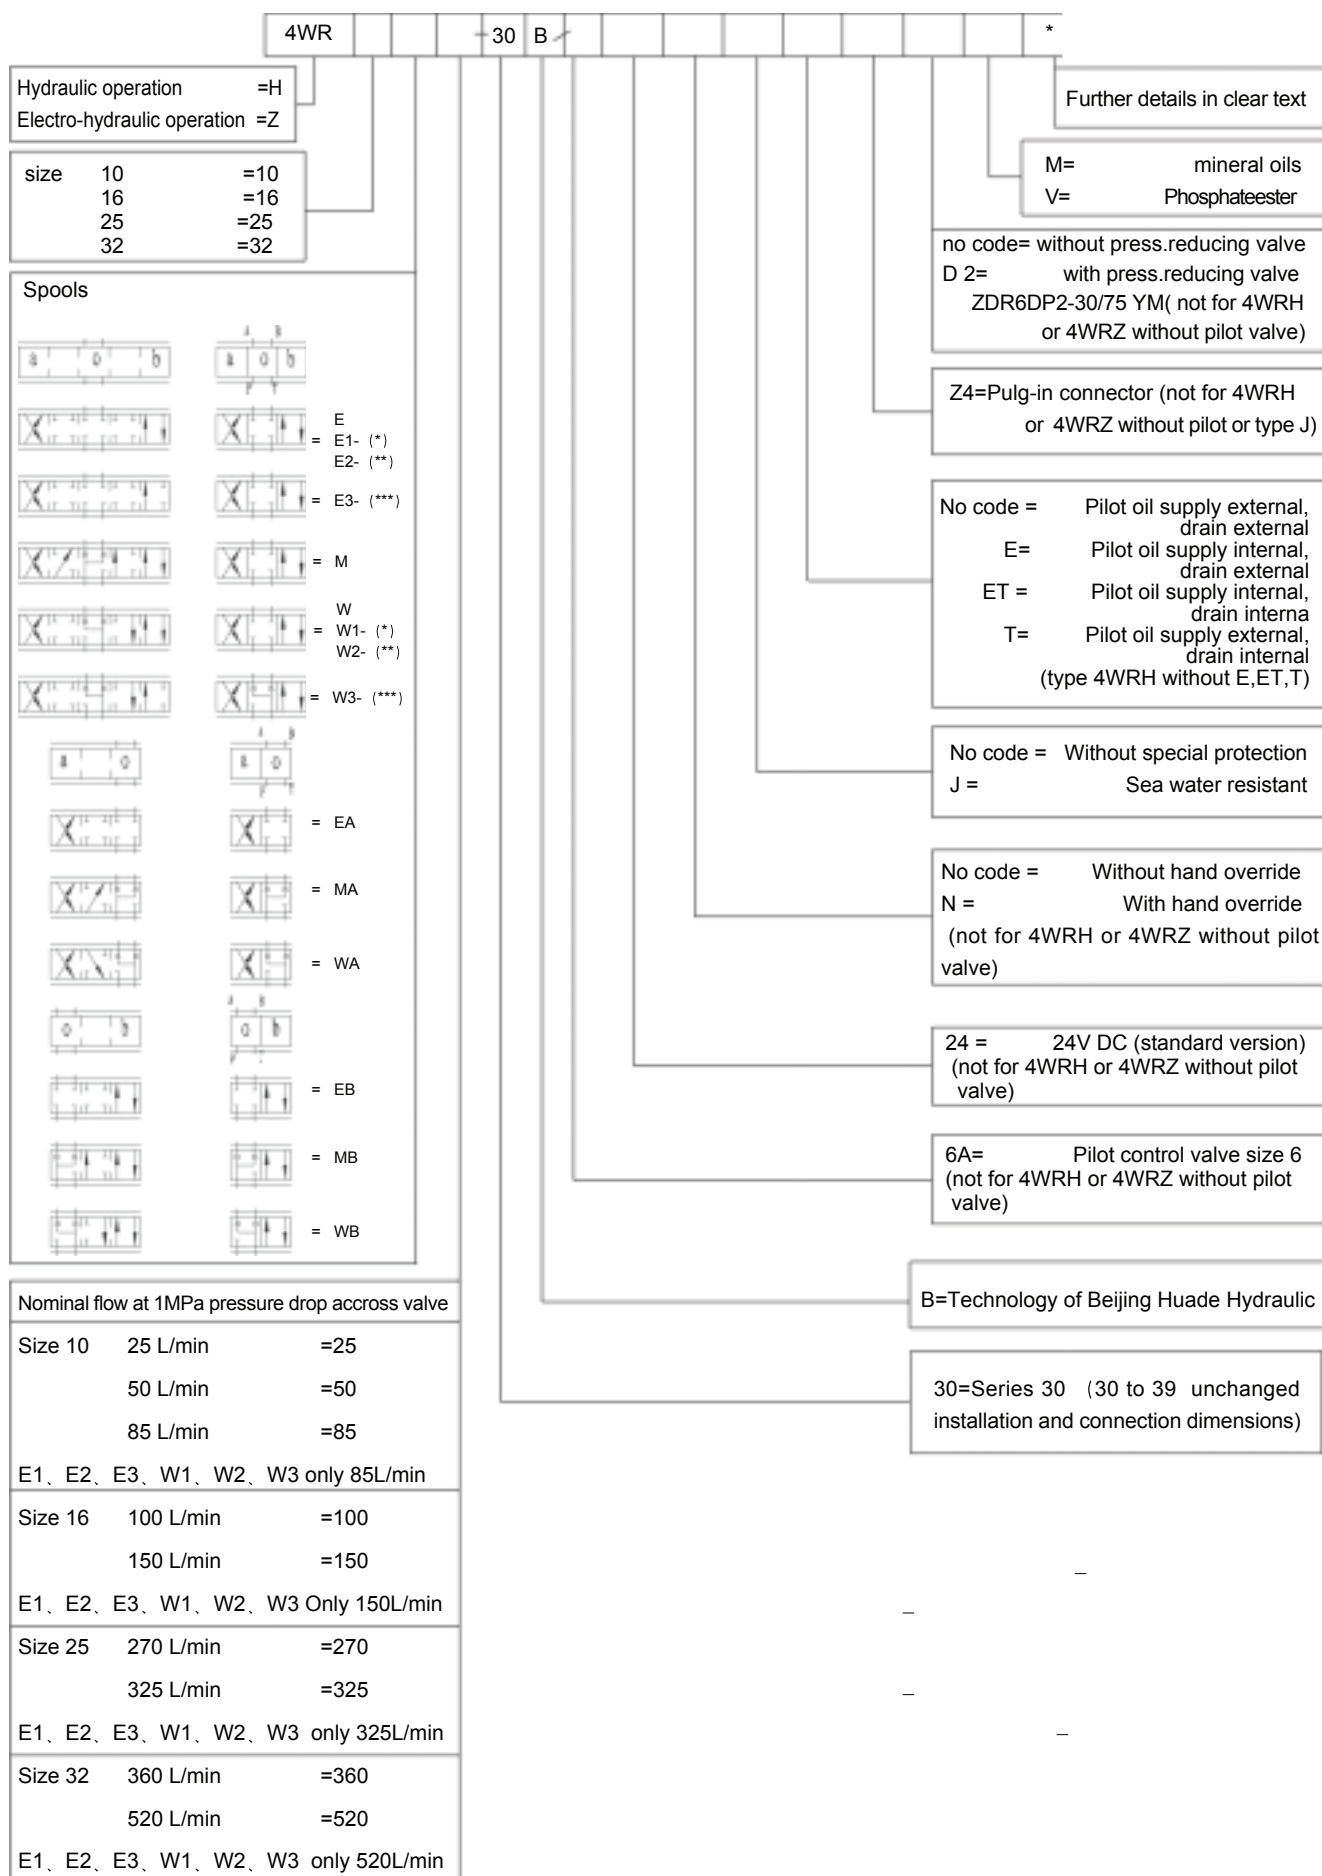

(for regenerative control, connect full bore of cyl.to port A)

Technical data

Hydraulic data




size		10	16	25	32
pilot valve pressure (MPa)	external pilot oil supply	3 to 10			
	internal pilot oil supply	Up to 10 (over 10 must installate ZDR6DP ₂ -30B/75YM)			
Main valve pressure (MPa)		31.5	35		
Return pressure (MPa)	port T(external pilot oil return)	31.5	25		15
	port T(internal pilot oil return)	3			
	port Y	3			
Pilot oil volume (cm ³) or spool movement 0~100%		1.7	4.6	10	26.5
Pilot oil flow at port X or Y (L/min) for spool movement 0~100%		3.5	5.5	7	15.9
Flow throught main valve (L/min)		270	460	877	1600
Hysteresis (L/min)		6			
Repeatability (%)		3			
degree of contamination (μ m)		≤ 20			
Fluid		Mineral oil(for NBR seal),Phosphate ester (for FPM seal)			
Viscosity range (mm ² /s)		2.8 to 380			
Fluid temperature range (°C)		-20 to +70			
mounting position		optional			
Weight (Kg)	valve with one solenoid	7.4	12.7	17.5	41.8
	valve with two solenoids	7.8	13.4	18.2	42.2

Electrical data

Type of supply		DC			
Norminal current of solenoid (A)		0.8			
Coil resistance (Ω)		cold (at20°C) 19.5;max.valve,hot 28.8			
Enviornment temperature (°C)		+50			
Coil temperature (°C)		+150			
Duty cycle		Continuous			
Pilot current (A)		≤ 0.02			
Insulation		IP65			
Associated amplifier	With 1 ramp time	VT-3000S30			
	With 5 ramp times	VT-3006S30			
Electrical connection		Plug connection			




Valve Movement with Stepped Electrical Input Singal

Size 10

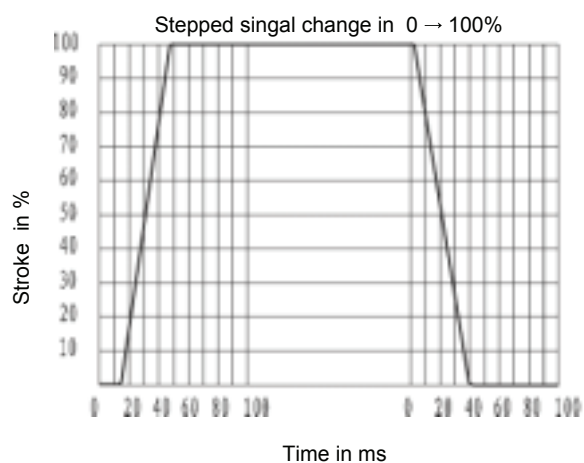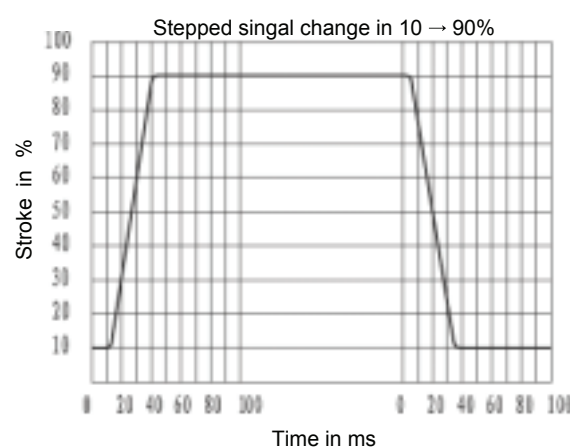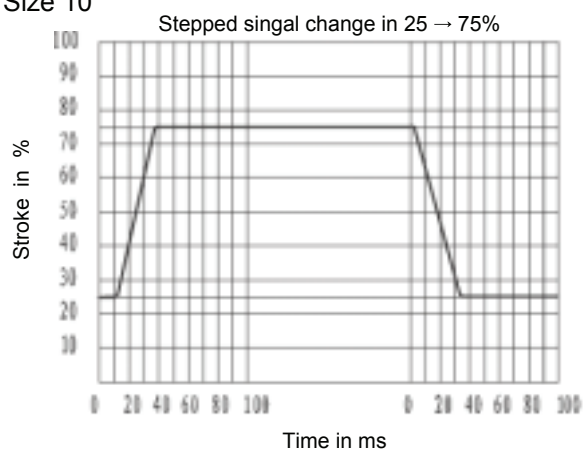

Pilot pressure at 5MPa


Size 16

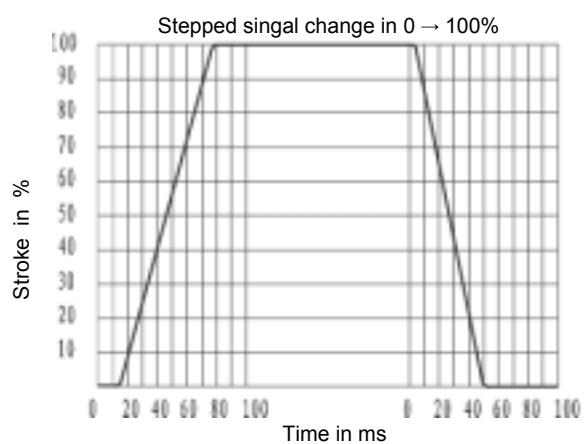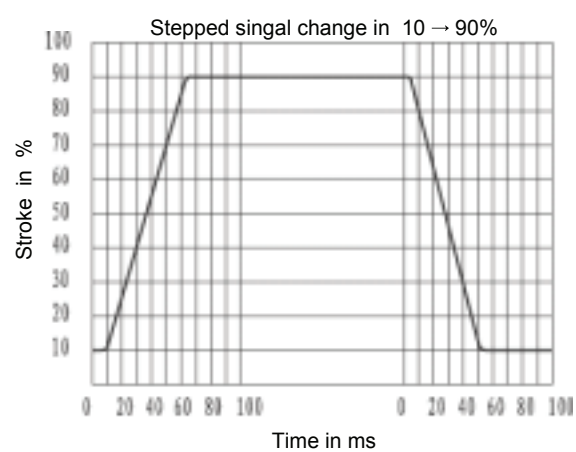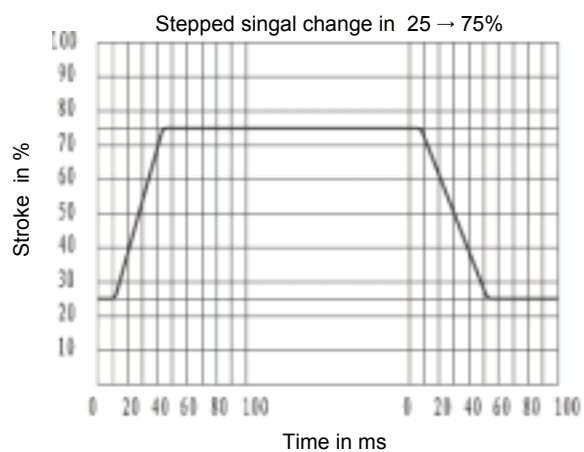


Pilot pressure at 5MPa

Size 25


Stepped singal change in 25 → 75%

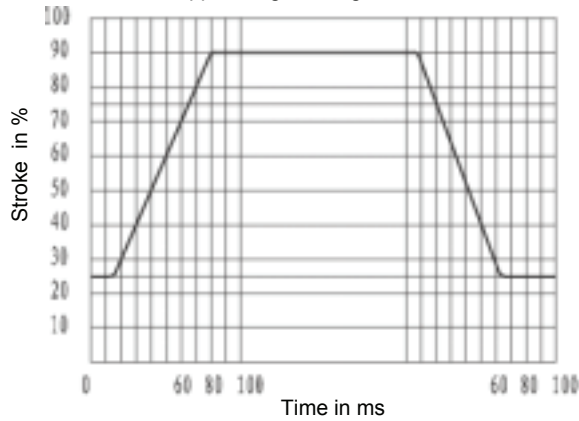

Stepped singal change in 10 → 90%

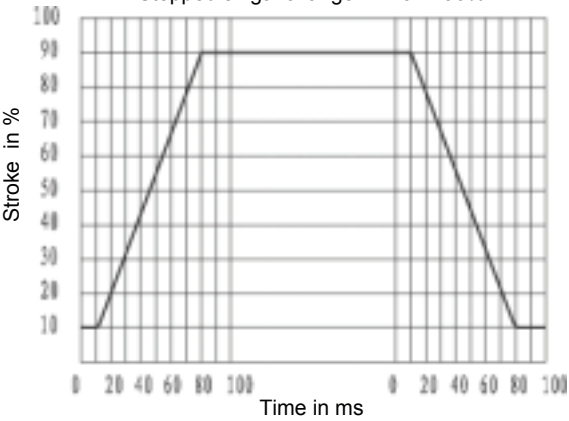


Stepped singal change in 0 → 100%

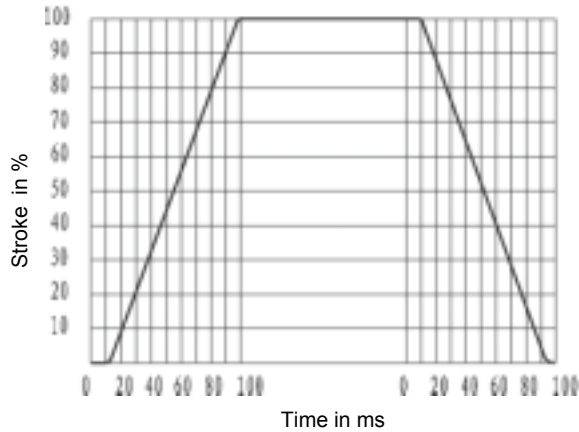


Pilot pressure at 5MPa

Size 32


Stepped singal change in 25 → 75%

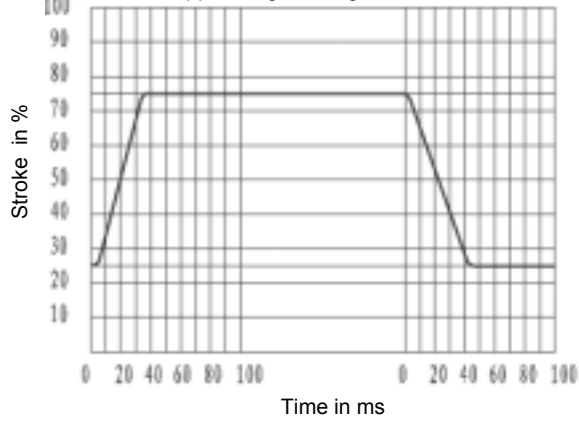

Stepped singal change in 10 → 90%

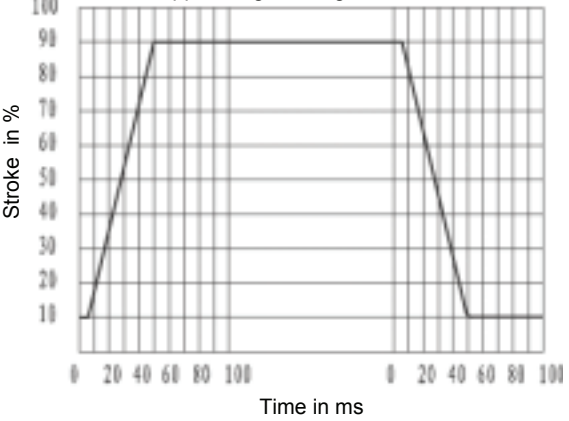


Stepped singal change in 0 → 100%

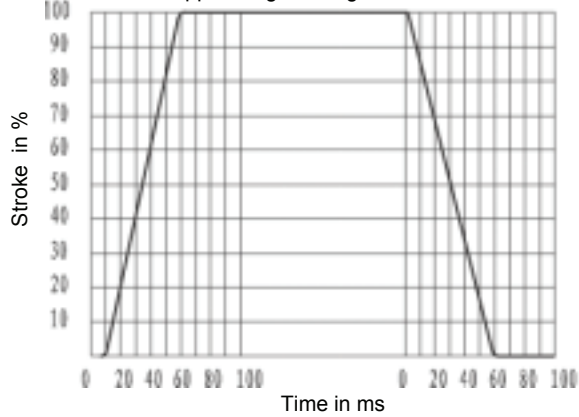


Pilot pressure at 5MPa

Size 10

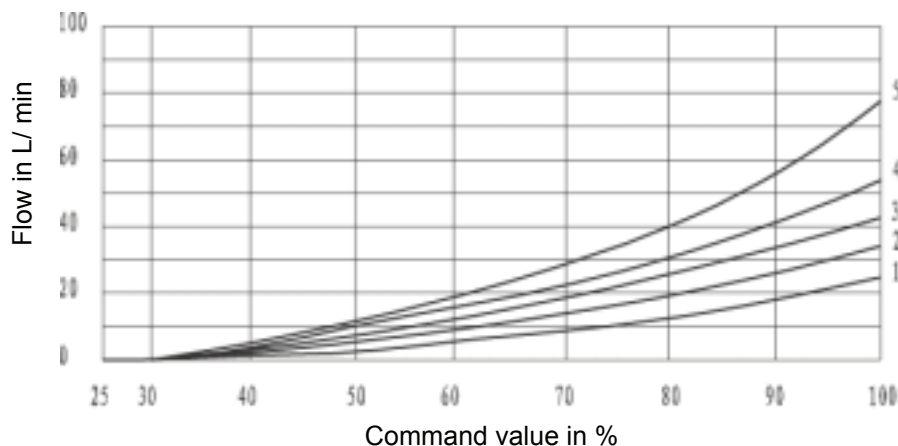


25L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

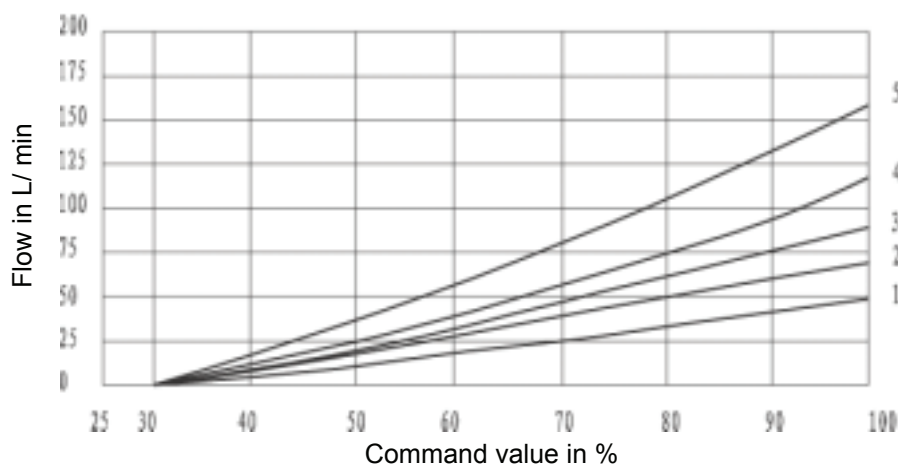

50L/min Nominal flow at 1MPa valve pressure difference


- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

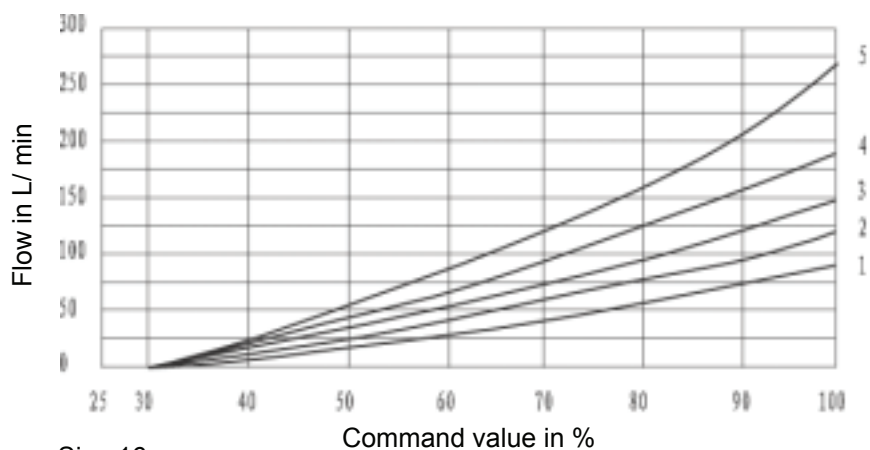

85L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant


Size 16

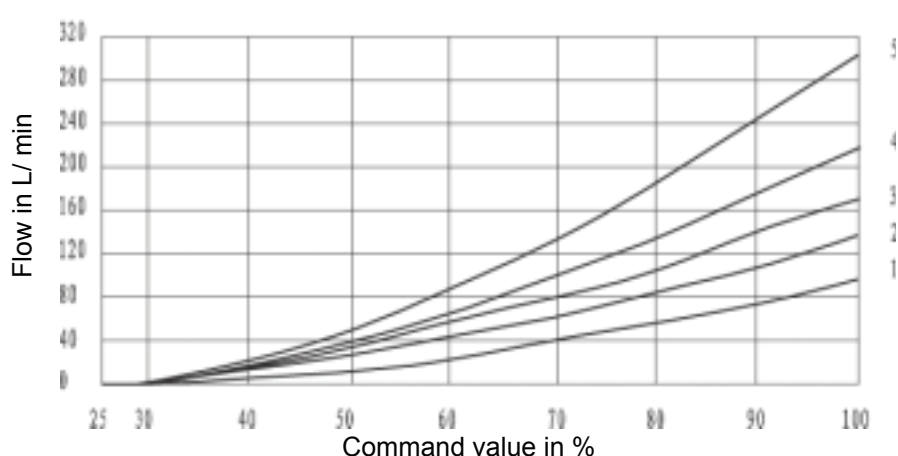

100L/min Nominal flow at 1MPa valve pressure difference


- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

Please note power limit!

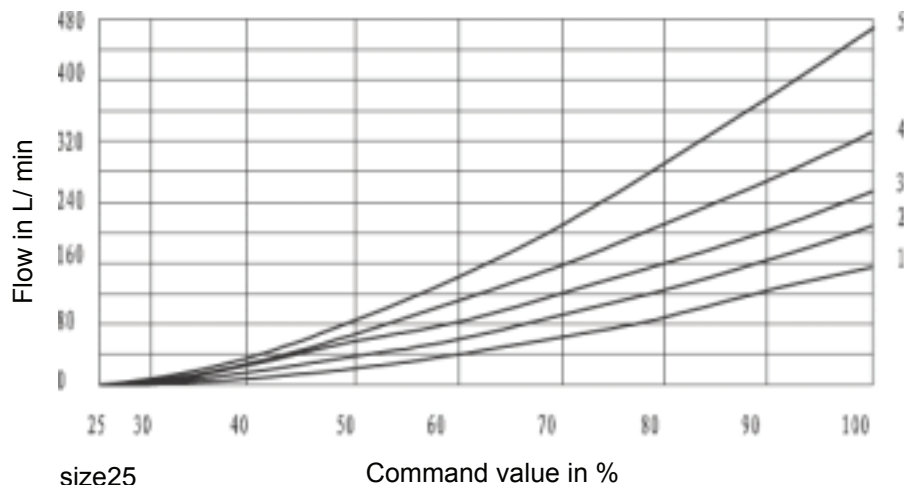


150L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

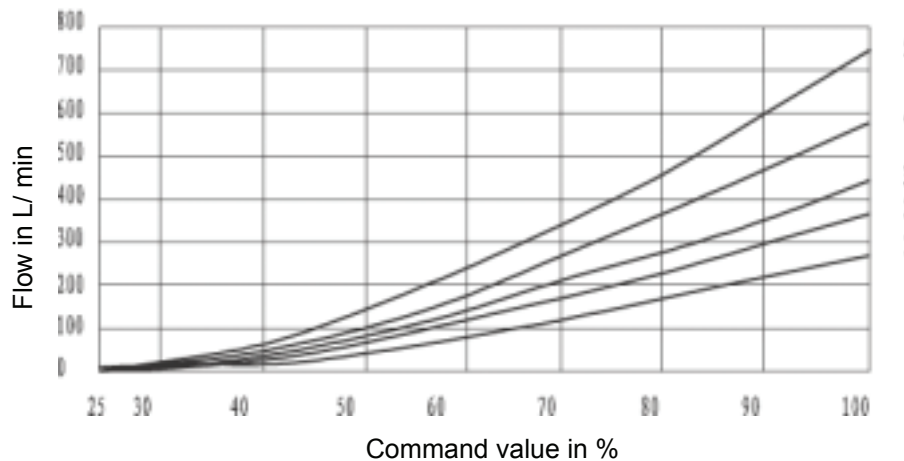


270L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

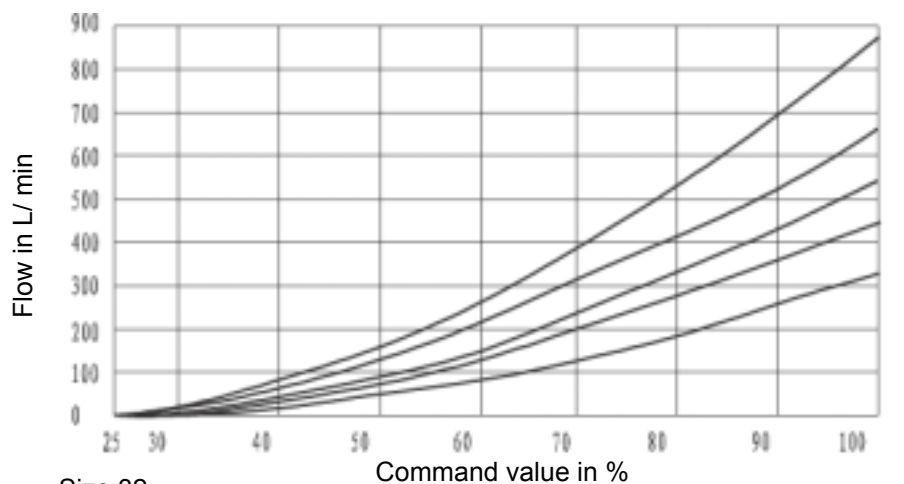

325L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

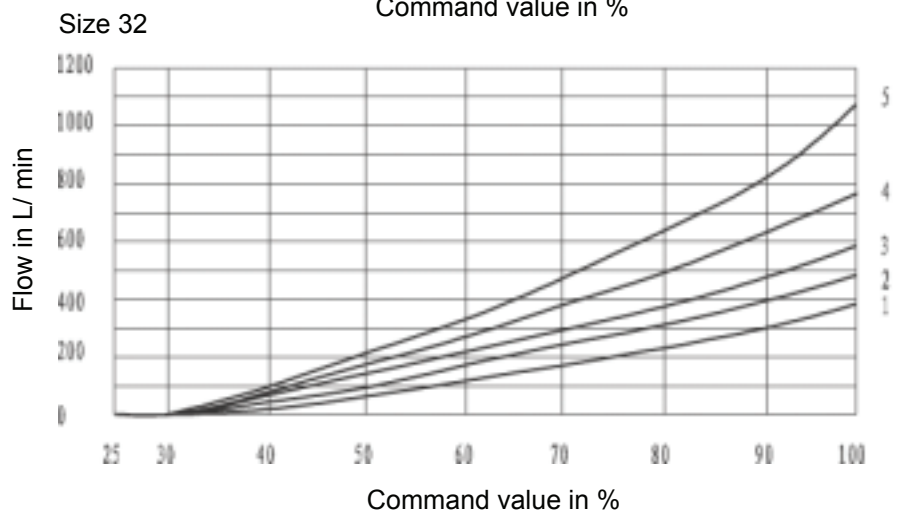


360L/min Nominal flow at 1MPa valve pressure difference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant

P_v = Pressure drop across valve (inlet pressure minus load pressure and return line pressure)

Characteristic curves:(measured at $v=36 \times 10^{-6} \text{m}^2/\text{S}$ $t=50^\circ\text{C}$)

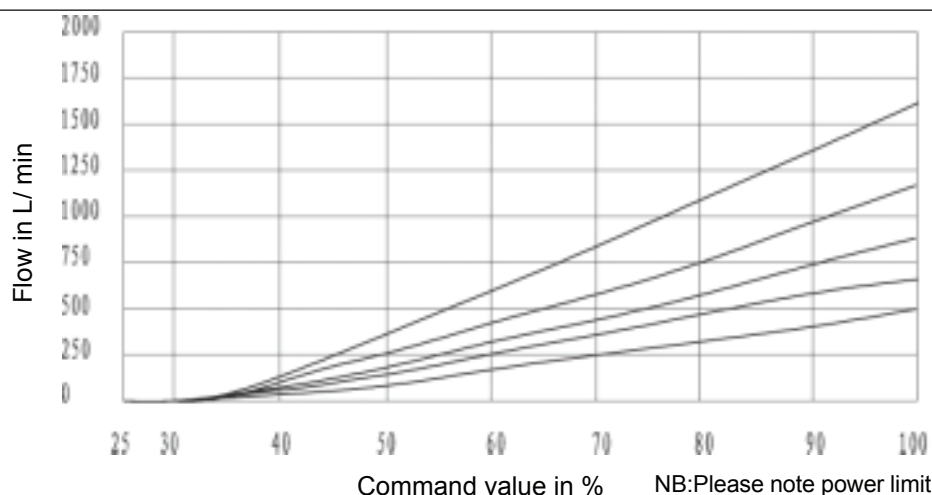


520L/min Nominal flow at
1MPa valve pressure dif-
ference

- 1 $P_v = 1\text{MPa}$ constant
- 2 $P_v = 2\text{MPa}$ constant
- 3 $P_v = 3\text{MPa}$ constant
- 4 $P_v = 5\text{MPa}$ constant
- 5 $P_v = 10\text{MPa}$ constant


P_v = Pressure drop across valve
(Input pressure minus load pres-
sure and return pressure)

Unit Dimensions Type 4WRZ10

(Dimensions in mm)

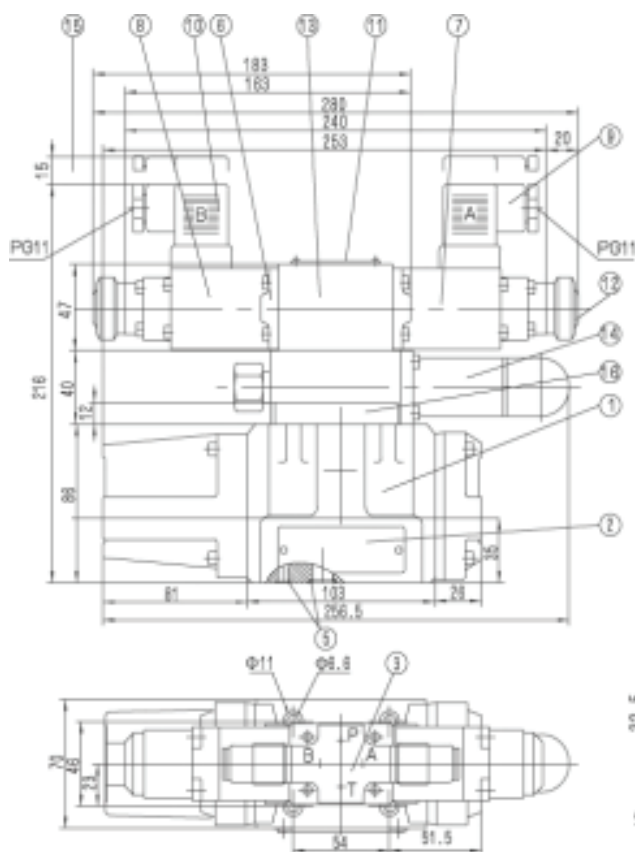


Required surface finish
of mating piece

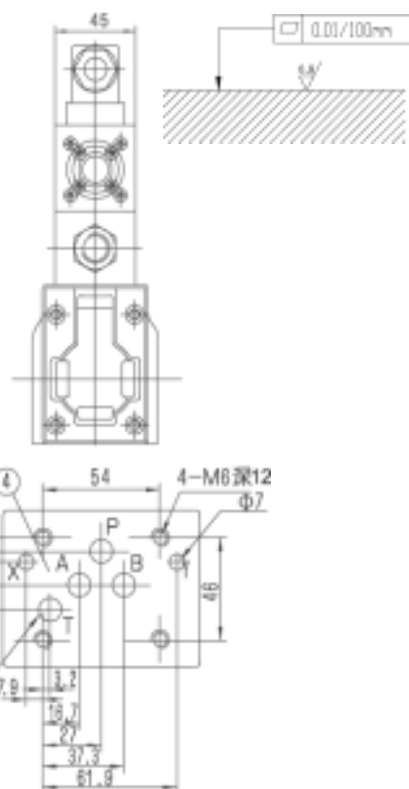

- | | | |
|--|---|---|
| 1 Main valve | 7 Proportional solenoid "a" | 14 Pressure reducing valve
ZDR6DP2-30/75YM |
| 2 Nameplate for main valve | 8 Proportional solenoid "b" | 15 Space required to remove plug |
| 3 Ports position of poilt valve | 9 Plug "A",coloured grey | 16 Connector plate(type WRH) |
| 4 Machined mounting
surface and position of ports | 10 Plug "B",coloured black | |
| 5 O-ring 12X2(Ports A,B,P,T)
O-ring 10.82X1.78(Ports X,Y) | 11 Nameplate of pilot valve | |
| 6 Pilot valve for 2-position valve
(Type A and B) | 12 Emergency hand operator | |
| | 13 Poilt valve for 3-position valve
with two solenoids and plug Z4 | |

Subplates G534/01
G535/01
G536/01

see page 81and 82

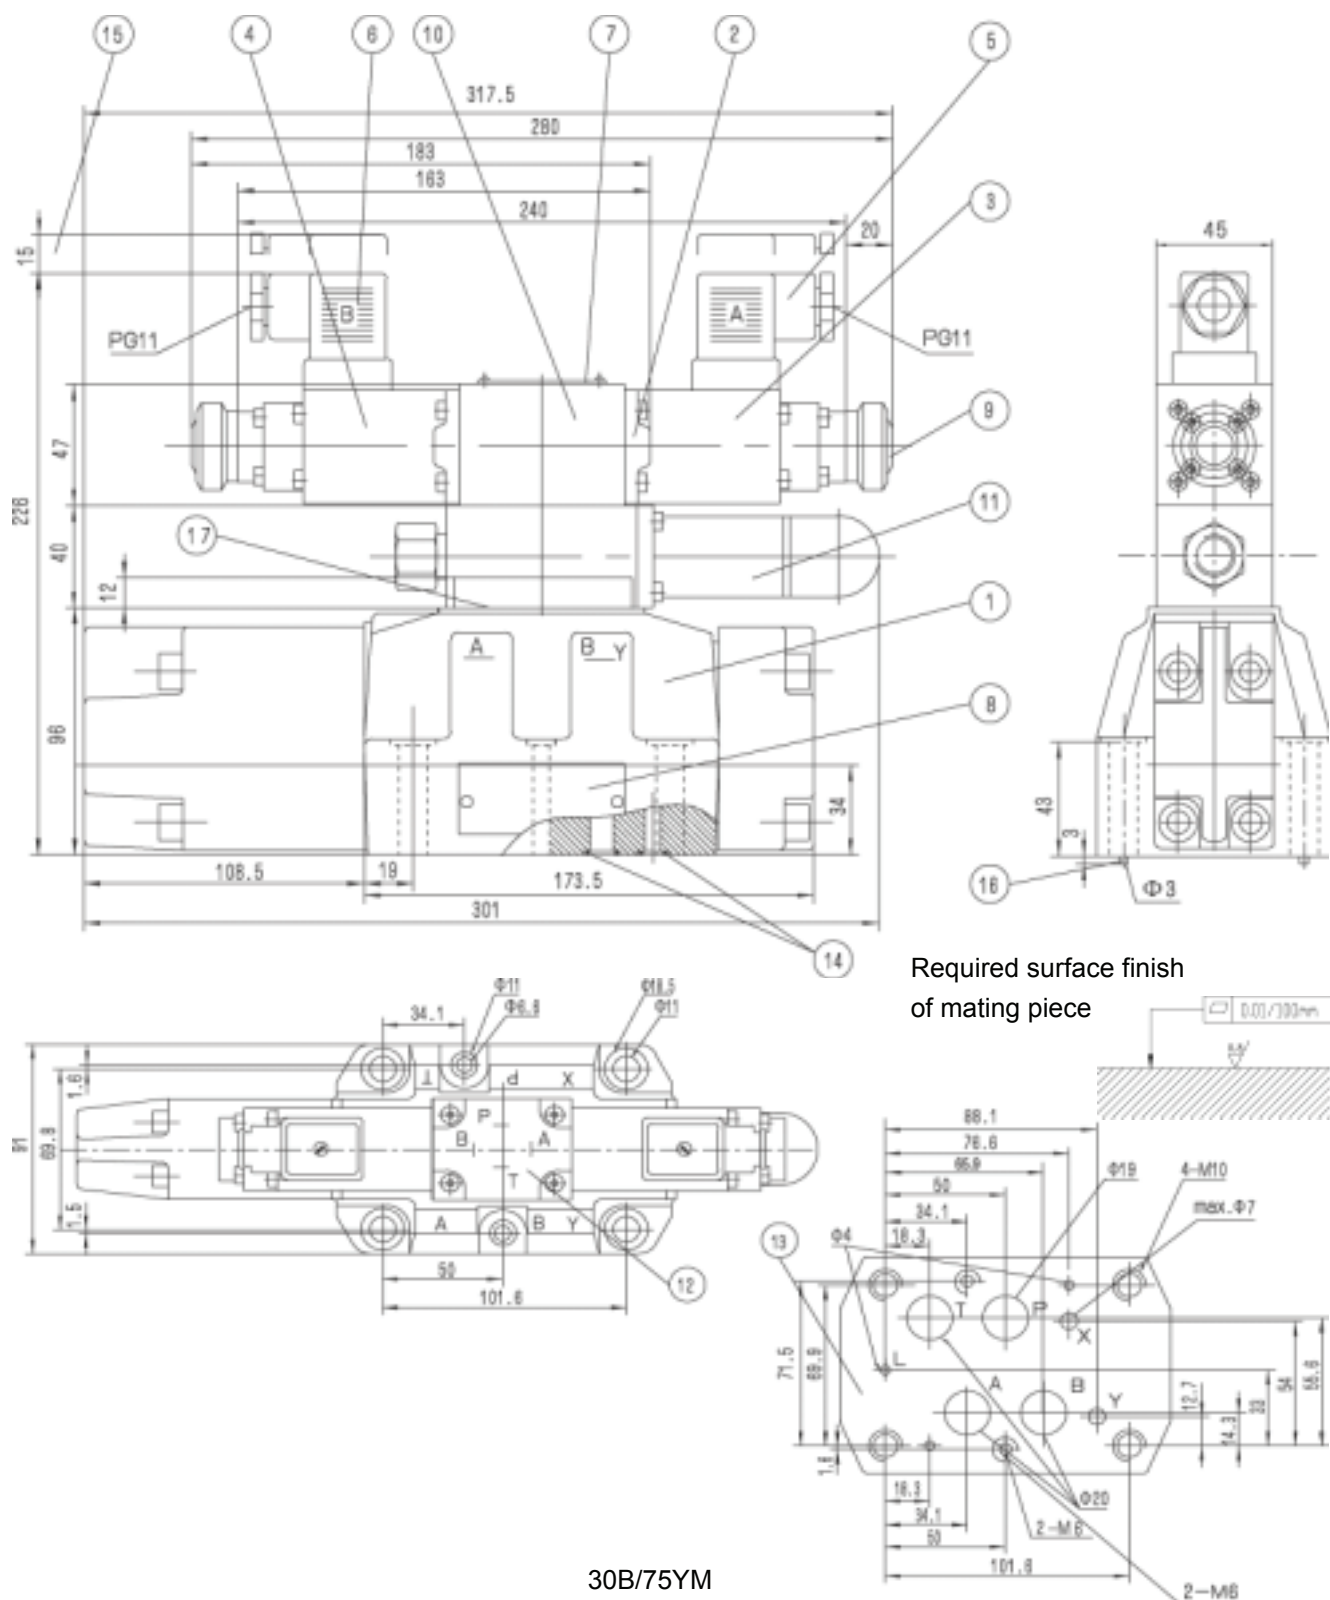

Required surface finish
of mating piece

30B/75YM

- 5 Plug "A", coloured grey
- 6 Plug "B", coloured black
- 7 Nameplate for pilot valve
- 8 Nameplate for main valve
- 9 Emergency hand operator
- 10 Pilot valve for 3-position with two solenoid and plug "Z4"
- 11 Pressure reducing valve ZDR6DP2-

- 12 Ports position of pilot valve
- 13 Machined mounting surface and position of ports
- 14 O-ring 22X2.5 (for Ports A,B,P,T)
O-ring 10X2 (for Ports X,Y)
- 15 Space required to remove plug
- 16 Locating pin
- 17 Connector plate(type WRH)

Subplates

G172/01


G172/01

G174/01

G174/02

G174/08

See page 82 and 83

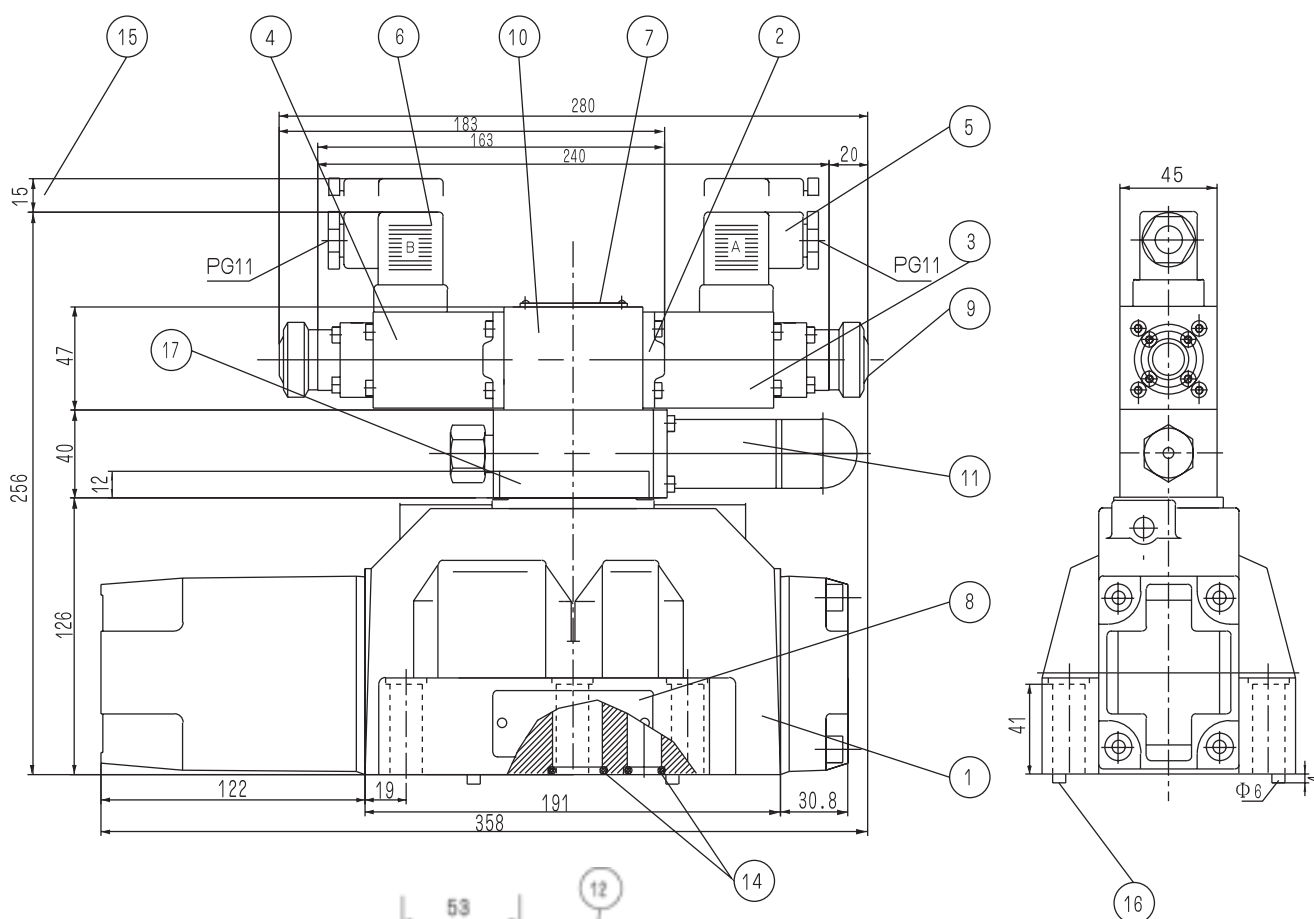



Required surface finish
of mating piece



- 1 Main valve
- 2 Pilot valve for 2-position valve with one solenoid and plug "Z4" (models A and B)
- 3 Proportional solenoid "a"
- 4 Proportional solenoid "b"
- 5 Plug "A", coloured grey
- 6 Plug "B", coloured black
- 7 Nameplate for pilot valve
- 8 Nameplate for main valve
- 9 Emergency hand operator
- 10 Pilot valve for 3-position valve with two solenoid and plug "Z4"
- 11 Pressure reducing valve ZDR6DP 2-30B/75YM
- 12 Ports Position of pilot valve
- 13 Machined mounting surface

- 14 O-ring 27X3 (for Ports A,B,P,T)
- 15 O-ring 19X3 (for Ports X,Y)
- 16 Subplates G151/01 G153/01 G154/01 G156/01 see page 84
- 17 Locating pin
- 18 Connector plate(type WRH)

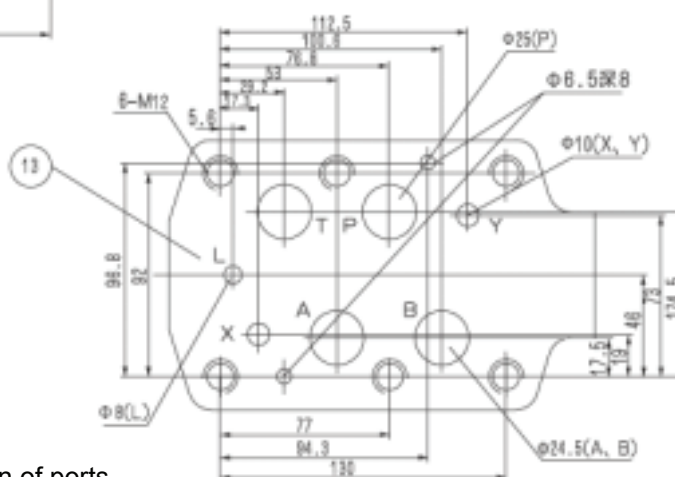

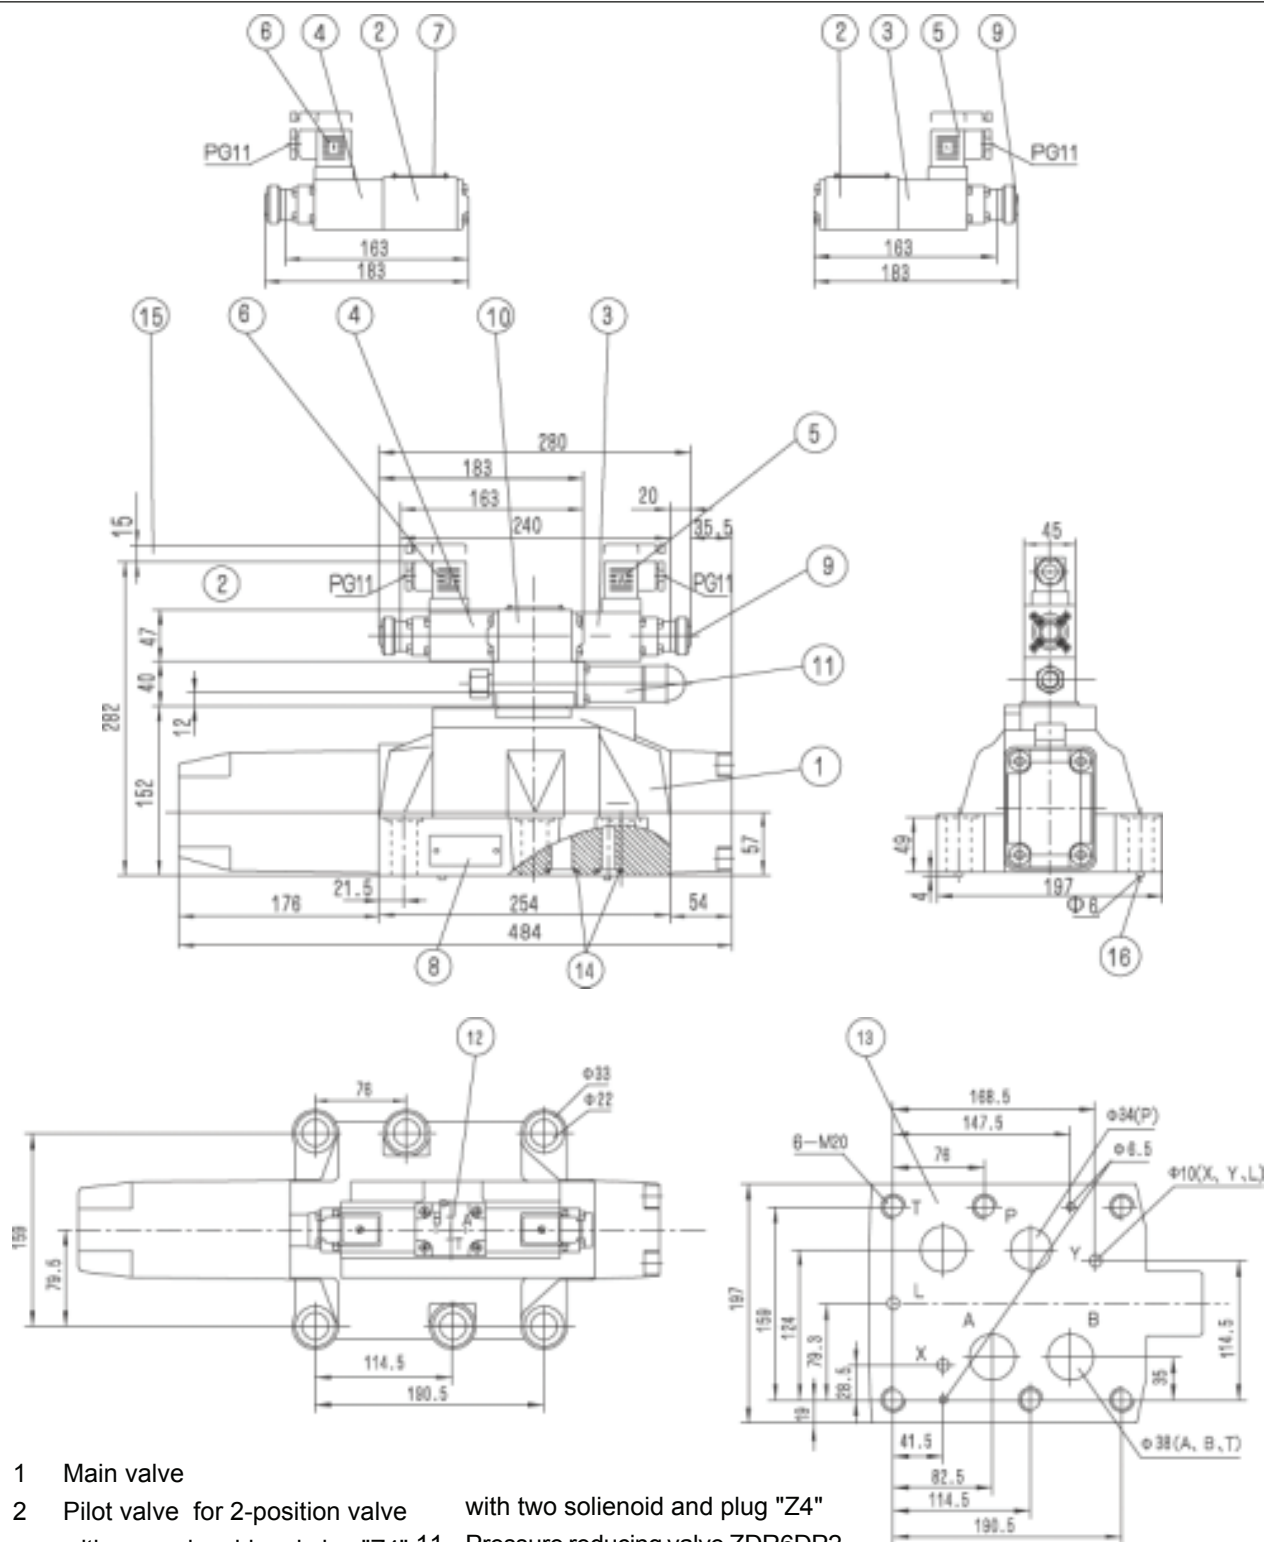

- | | | |
|----|---|--|
| 1 | Main valve | |
| 2 | Pilot valve for 2-position valve with one solenoid and plug "Z4" (models A and B) | with two solenoid and plug "Z4" Pressure reducing valve ZDR6DP2-30B/75YM |
| 3 | Proportional solenoid "a" | 12 Ports position of pilot valve |
| 4 | Proportional solenoid "b" | 13 Maachined mounting surface and position of ports |
| 5 | Plug "A",coloured grey | |
| 6 | Plug "B",coloured black | 14 O-ring 42X3(Ports A,B,P,T) |
| 7 | Nameplate for pilot valve | O-ring 19X3(Ports X,Y) |
| 8 | Nameplate for wain valve | 15 Space required to remove plug |
| 9 | Emergency hand operator | 16 Locating pin |
| 10 | Pilot valve for 3-position valve | 17 Connector plate(type WRH) |

Required surface finish
of mating piece

Subplates
G157/01
G157/02
See page 85



ANNOTATIONS :

HUADE AMÉRICA

CEP : 03162-020

RUA HIPÓDROMO 1445 – MOOCA, SÃO PAULO, SP, BRASIL

TEL : (11) 3186-5959

huade@huade.com.br

www.huade.com.br