




## Catálogo de Productos

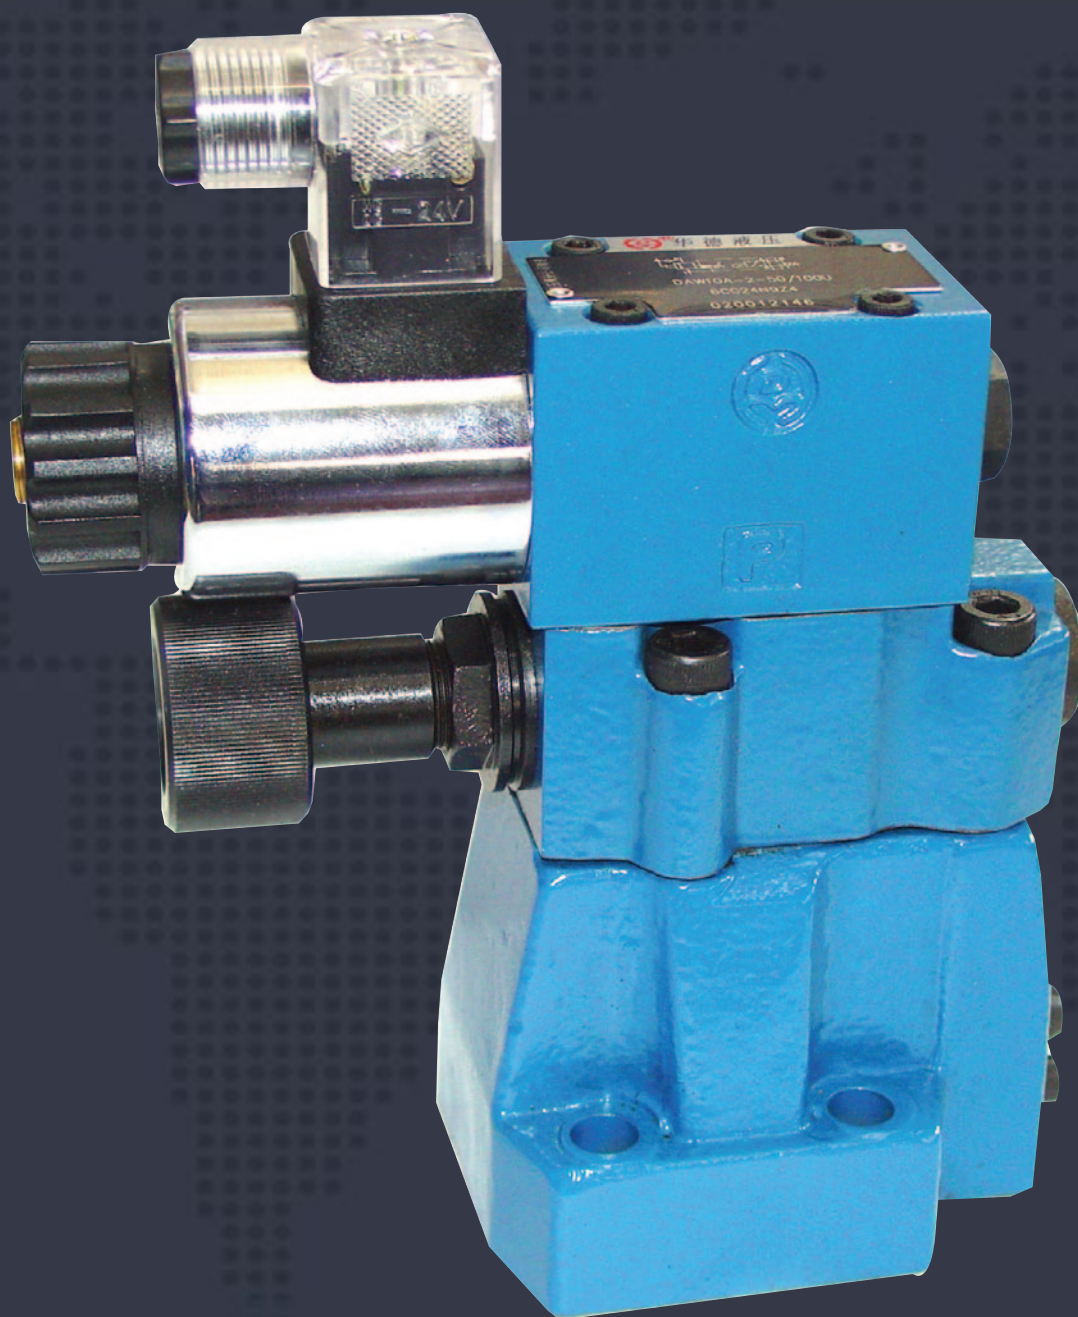


Pressure relief valve, type DB/DBW...50B/ (New Series)

|   |   |              |                 |                              |
|---|---|--------------|-----------------|------------------------------|
| BEIJING HUADE<br>HYDRAULIC INDUSTRIAL<br>GROUP CO.,LTD. | <b>Pressure relief valve, type DB/DBW...50B/<br/>(New Series)</b> |              |                 | RE25805 /12.2004             |
|   | Size 10 to 32   | up to 35 MPa | up to 650 L/min | Replaces:<br>RE25805/05.2001 |

#### Features:

- Subplate mounting
- Porting pattern to DIN 24 340, form E,ISO 6264 and CETOP-RP 121H
- Pipe connection
- Insert connection
- Three adjustment elements:
  - Rotary knob
  - Hex. head screw with protective cap
  - Lockable rotary knob with scale
- Solenoid operated unloading via built-in directional spool valve

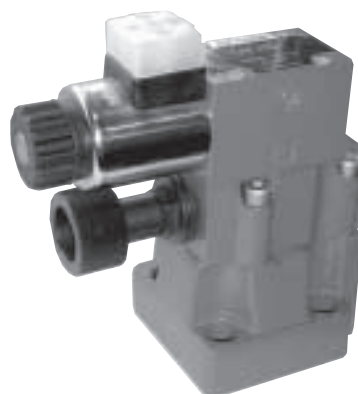

#### Function, section: type DB...

##### General

Types DB and DBW pressure valves are pilot operated pressure relief valves.


They are used for the limitation (DB) or limitation and solenoid actuated unloading (DBW) of the control pressure. The pressure relief valves (DB) consist mainly of the main valve (1) with main spool assembly (3) and pilot operated valve (2) with pressure adjustment element.

##### Pressure relief valve type DB:

The pressure present in port A acts on the main spool (3). At the same time pressure is applied via the control lines (6) and (7), which are fitted with orifices (4) and (5), on the spring loaded side of the main spool (3) and at the ball (8) in the pilot control valve (2). If the pressure in port A exceeds the valve set at the spring (9), the ball (8) opens against the spring (9).

The signal for this comes internally via the control lines (10) and (6) from port A. The pressure fluid on the spring loaded side of the main spool (3) now flows via the control line (7), orifice bore (11) and ball (8) into the spring chamber (12). In type DB...50B/... it flows internally via the control line (13) to tank, or in type DB...50/...Y.. externally via the control line (14). Due to the orifices (4) and (5) a pressure drop occurs at the main spool (3), the connection from port A to port B is open, Now the pressure fluid flows from port A to port B whilst maintaining the set operating pressure.

The pressure relief valve may be unloaded or switched over to a different pressure (second pressure stage) via port "X" (15).

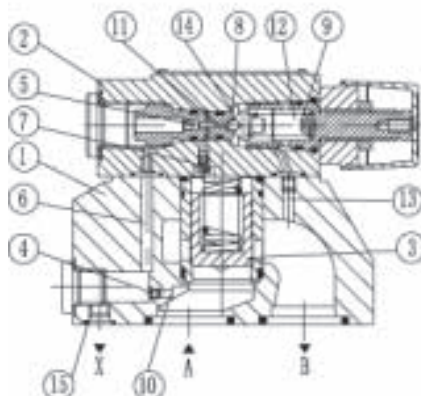


Type DBW...50B/...

### Pressure relief valve type DBW

The function of this valve is basically same as the valve type DB.

The unloading at the main spool(3),however,is achieved by actuating the built-in directional valve(16).

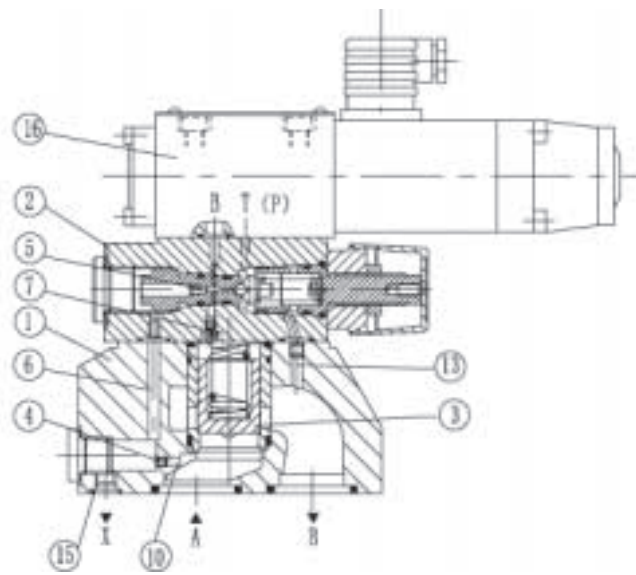

Type DBW...50B/...

### symbols

|  |   |   |  |
|--|---|---|--|
| <p>DB ...50B/..</p>  | <p>DB ...50B/..X.</p>   | <p>DB ...50B/..Y..</p>  | <p>DB ...50B/..XY..</p>  |
| <p>DBW ...50B/..</p> <p>Normally closed</p> <p>Normally open</p> | <p>DBW ...50B/..X..</p> <p>Normally closed</p> <p>Normally open</p> | <p>DBW ...50B/..Y..</p> <p>Normally closed</p> <p>Normally open</p> | <p>DBW ...50B/..XY..</p> <p>Normally closed</p> <p>Normally open</p> |

# Huade América

[illegible]

## Technical data

### General

| Installation                              |                       |                  | optional                     |      |      |      |      |
|---|-----------------------|------------------|------------------------------|------|------|------|------|
| Weight                                    |                       |                  | DB10                         | DB15 | DB20 | DB25 | DB30 |
|   | Subplate<br>mounting  | DB (Kg)          | 2.6                          | -    | 3.5  | -    | 4.4  |
|   |                       | DBW (Kg)         | 3.8                          | -    | 4.7  | -    | 5.6  |
|   |                       | DBC (Kg)         | 1.2 (type DBWC add 1.2Kg)    |      |      |      |      |
|   |                       | DBC10 or 30 (Kg) | 1.5 (DBWC10 or 30 add 1.2Kg) |      |      |      |      |
|   | Threade<br>connection | DB..G.. (Kg)     | 5.3                          | 5.2  | 5.1  | 5.0  | 4.8  |
|   |                       | DBW..G.. (Kg)    | 6.5                          | 6.4  | 6.3  | 6.2  | 6.0  |
| Technical data for the directional valves |                       |                  | see WE6.../...               |      |      |      |      |

### Hydraulic technical data


|   |                                      |  |      |      |      |      |
|---|--------------------------------------|--|------|------|------|------|
| Maximum operating pressure at ports A, B, X (MPa) |                                      | up to 35.0   |      |      |      |      |
| Maximum back pressure at port Y                   | DB (MPa)                             | up to 31.5   |      |      |      |      |
|   | DBW.6A. (standard solenoids) (MPa)   | AC(DC) 10.0 AC(DC) 16.0                                      |      |      |      |      |
|   | DBW.6B. (high-power solenoids) (MPa) | AC(DC) 16.0  |      |      |      |      |
| Settable pressure                                 | Minimum (MPa)                        | flow dependent (see characteristic curves )                  |      |      |      |      |
|   | Maximum (MPa)                        | Maximum 5.0、10.0、20.0、31.5、35.0                              |      |      |      |      |
| Maximum flow                                      |                                      | DB10   | DB15 | DB20 | DB25 | DB30 |
|   | Subplate mounting (L/min)            | 250  | -    | 500  | -    | 650  |
|   | Threaded connections (L/min)         | 250  | 500  | 500  | 500  | 650  |
| Pressure fluid                                    |                                      | Mineral oil (for NBR seal) or phosphate ester (for FPM seal) |      |      |      |      |
| Pressure fluid temperature range (°C)             |                                      | -30 to + 80  |      |      |      |      |
| Viscosity range (mm²/s)                           |                                      | 10 to 800  |      |      |      |      |
| Degree of contamination                           |                                      | NAS 1638 class 9.  |      |      |      |      |




## Characteristic curves (measured at $v = 41 \text{ mm}^2/\text{s}$ and $t = 50^\circ\text{C}$ )

The characteristic curves were measured with external, at zero pressure, drain pilot oil.  
With internal pilot oil drain the inlet pressure increases by the outlet pressure present at port B.


Inlet pressure in relation to the flow

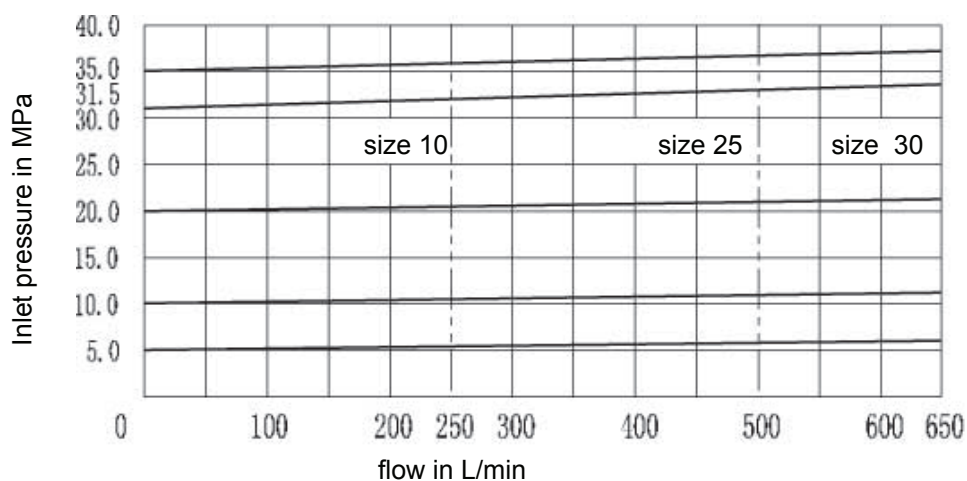


Minimum settable pressure and bypass pressure in relation to the flow  
Standard version

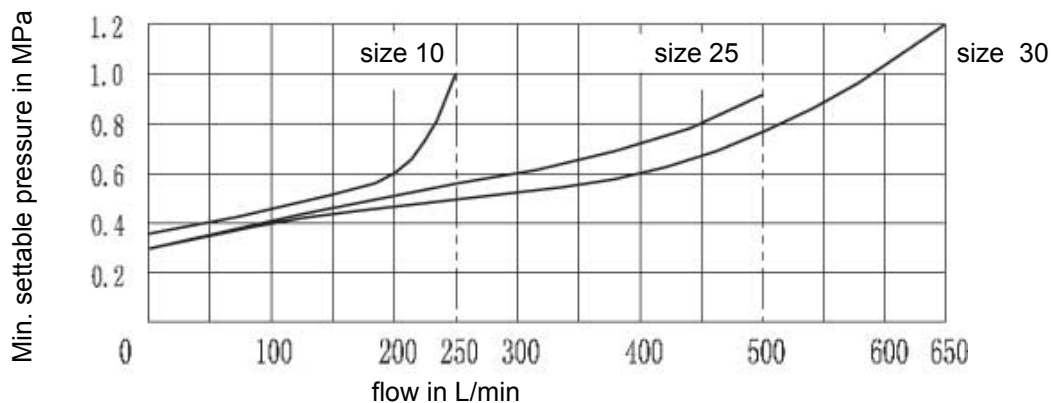


Minimum settable pressure and bypass pressure in relation to the flow  
Version "U"

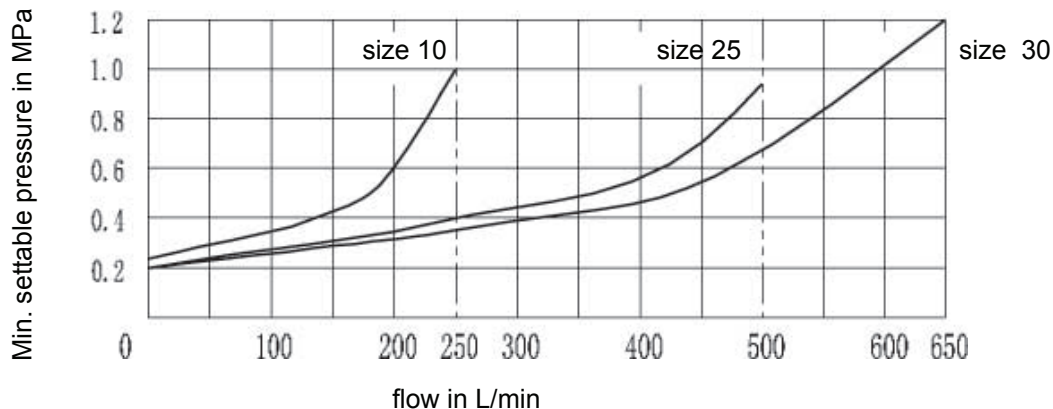

The characteristic curves are valid for outlet pressure  $B = 0$  over the entire flow range!

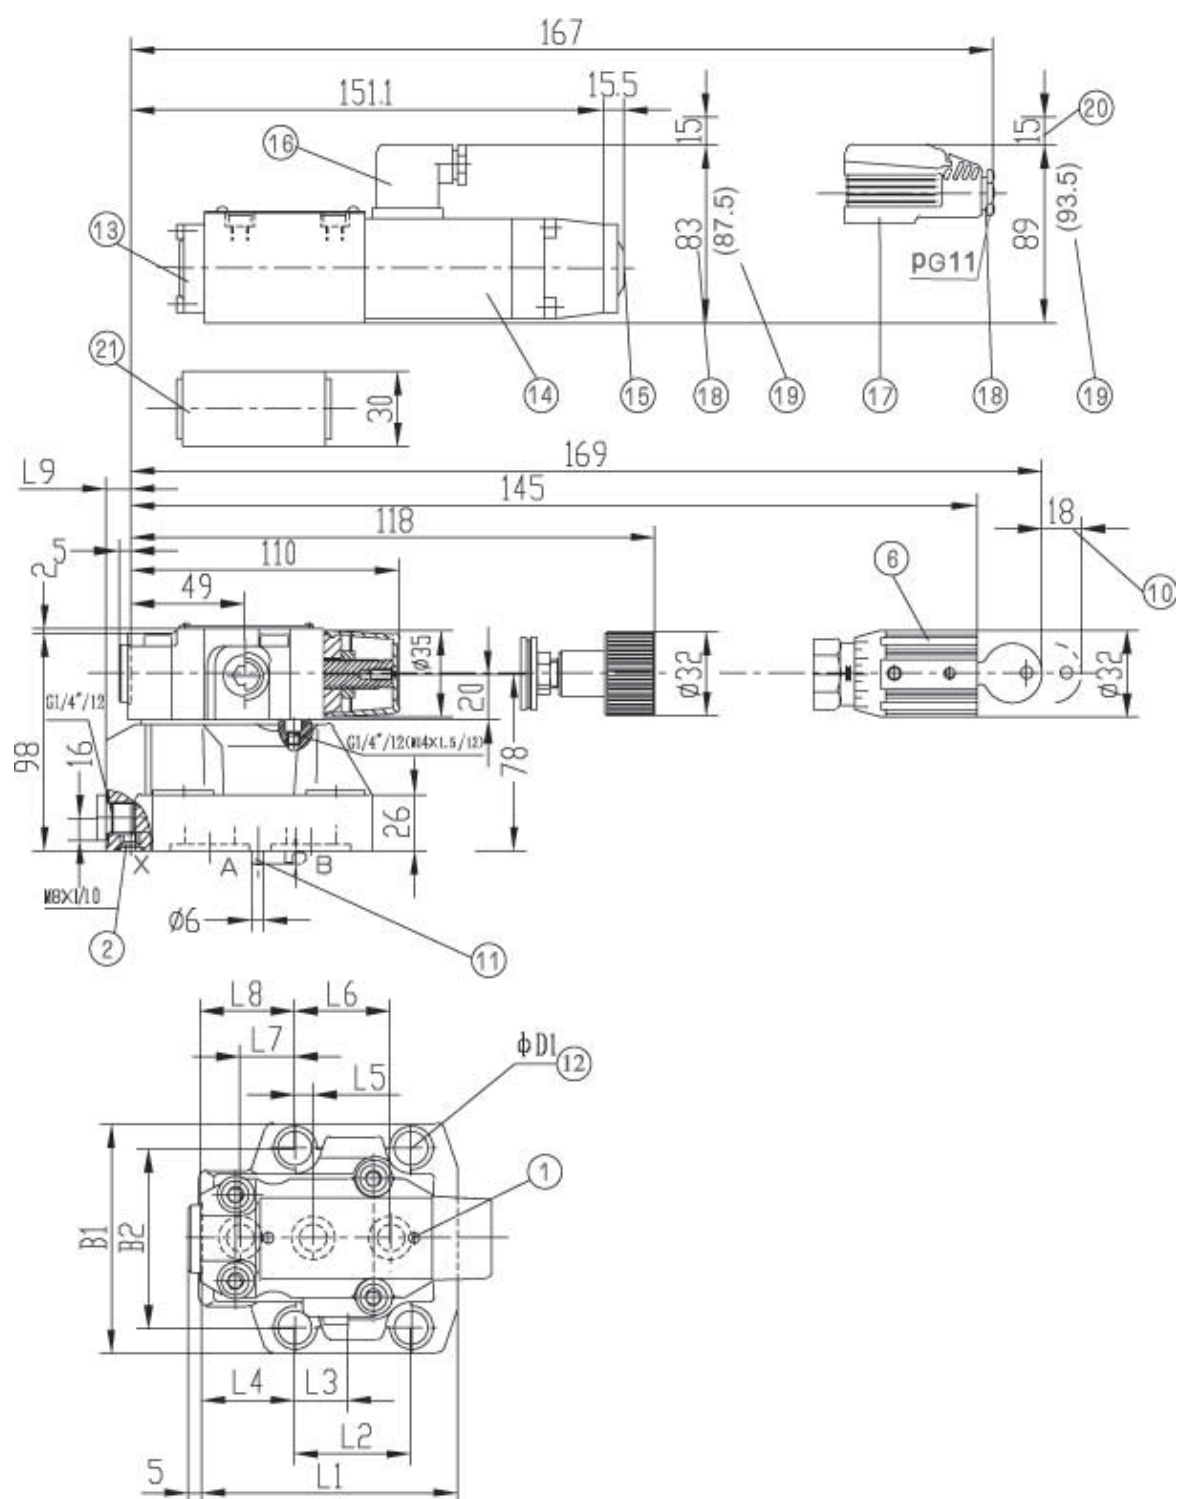


| Type     | L1    | L2   | L3   | L4   | L5   | L6   | L7   | L8   | L9   | B1  | B2   | φD1 | Ports A,B    | Port Y      |
|----------|-------|------|------|------|------|------|------|------|------|-----|------|-----|--------------|-------------|
| DB/DBW10 | 91    | 53.8 | 22.1 | 27.5 | 22.1 | 47.5 | 0    | 25.5 | 2    | 78  | 53.8 | 14  | 17.12 × 2.62 | 9.25 × 1.78 |
| DB/DBW20 | 116   | 66.7 | 33.4 | 33.3 | 11.1 | 55.6 | 23.8 | 22.8 | 10.5 | 100 | 70   | 18  | 28.17 × 3.53 | 9.25 × 1.78 |
| DB/DBW30 | 147.5 | 88.9 | 44.5 | 41   | 12.7 | 76.2 | 31.8 | 20   | 21   | 115 | 82.6 | 20  | 34.52 × 3.53 | 9.25 × 1.78 |

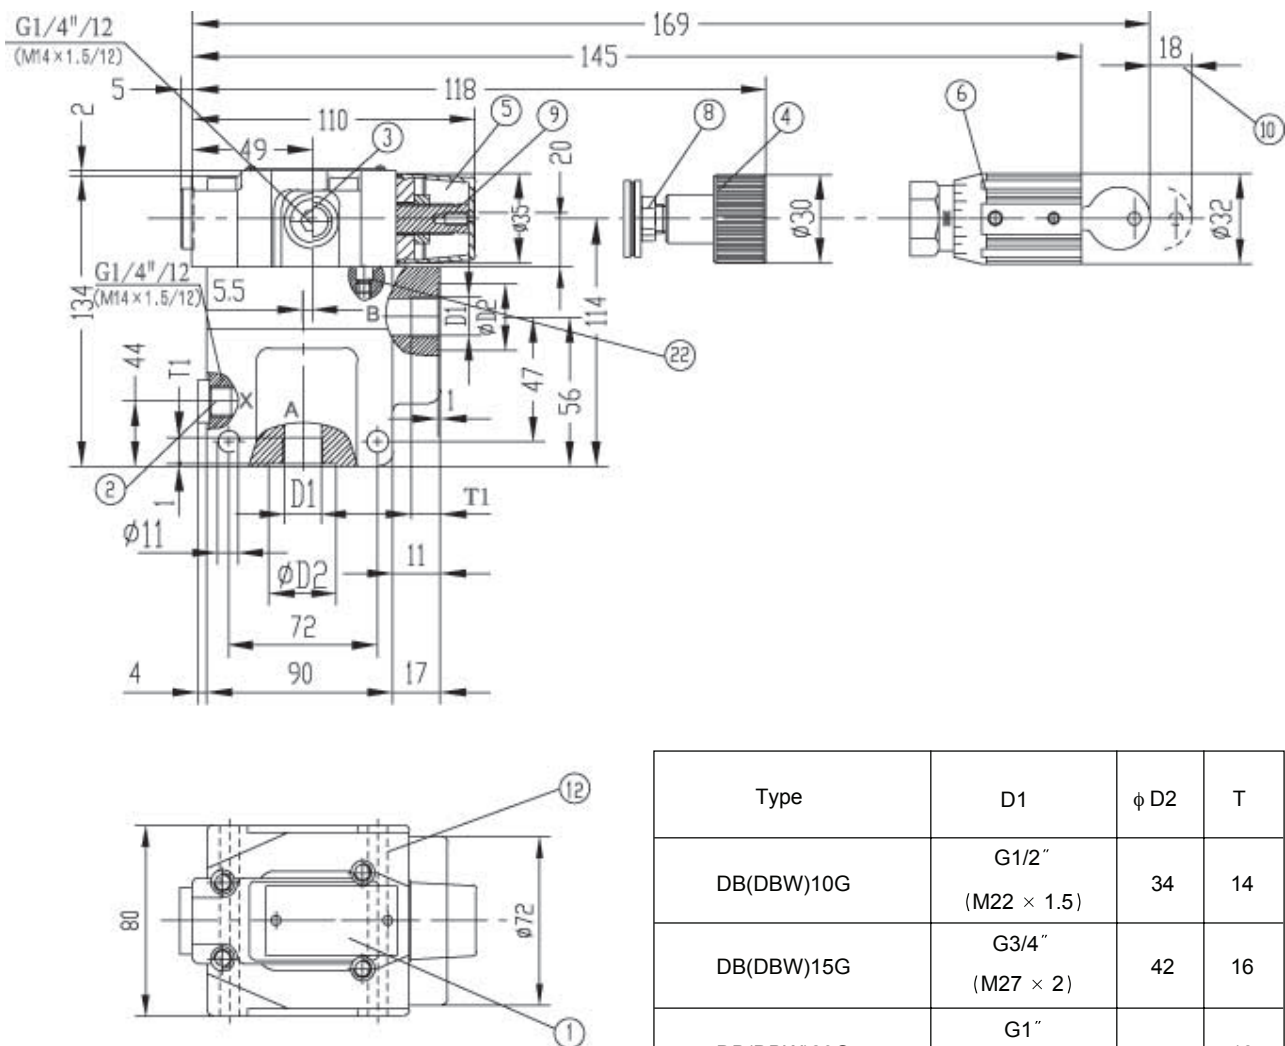

| Type       | D1                          | $\phi$ D2 | T  |
|------------|-----------------------------|-----------|----|
| DB(DBW)10G | G1/2"<br>(M22 $\times$ 1.5) | 34        | 14 |
| DB(DBW)15G | G3/4"<br>(M27 $\times$ 2)   | 42        | 16 |
| DB(DBW)20G | G1"<br>(M33 $\times$ 2)     | 47        | 18 |
| DB(DBW)25G | G1 1/4"<br>(M42 $\times$ 2) | 58        | 20 |
| DB(DBW)30G | G1 1/4"<br>(M48 $\times$ 2) | 65        | 22 |



Pilot control valves with cartridge element (DBC 30) or without cartridge element (DBC).

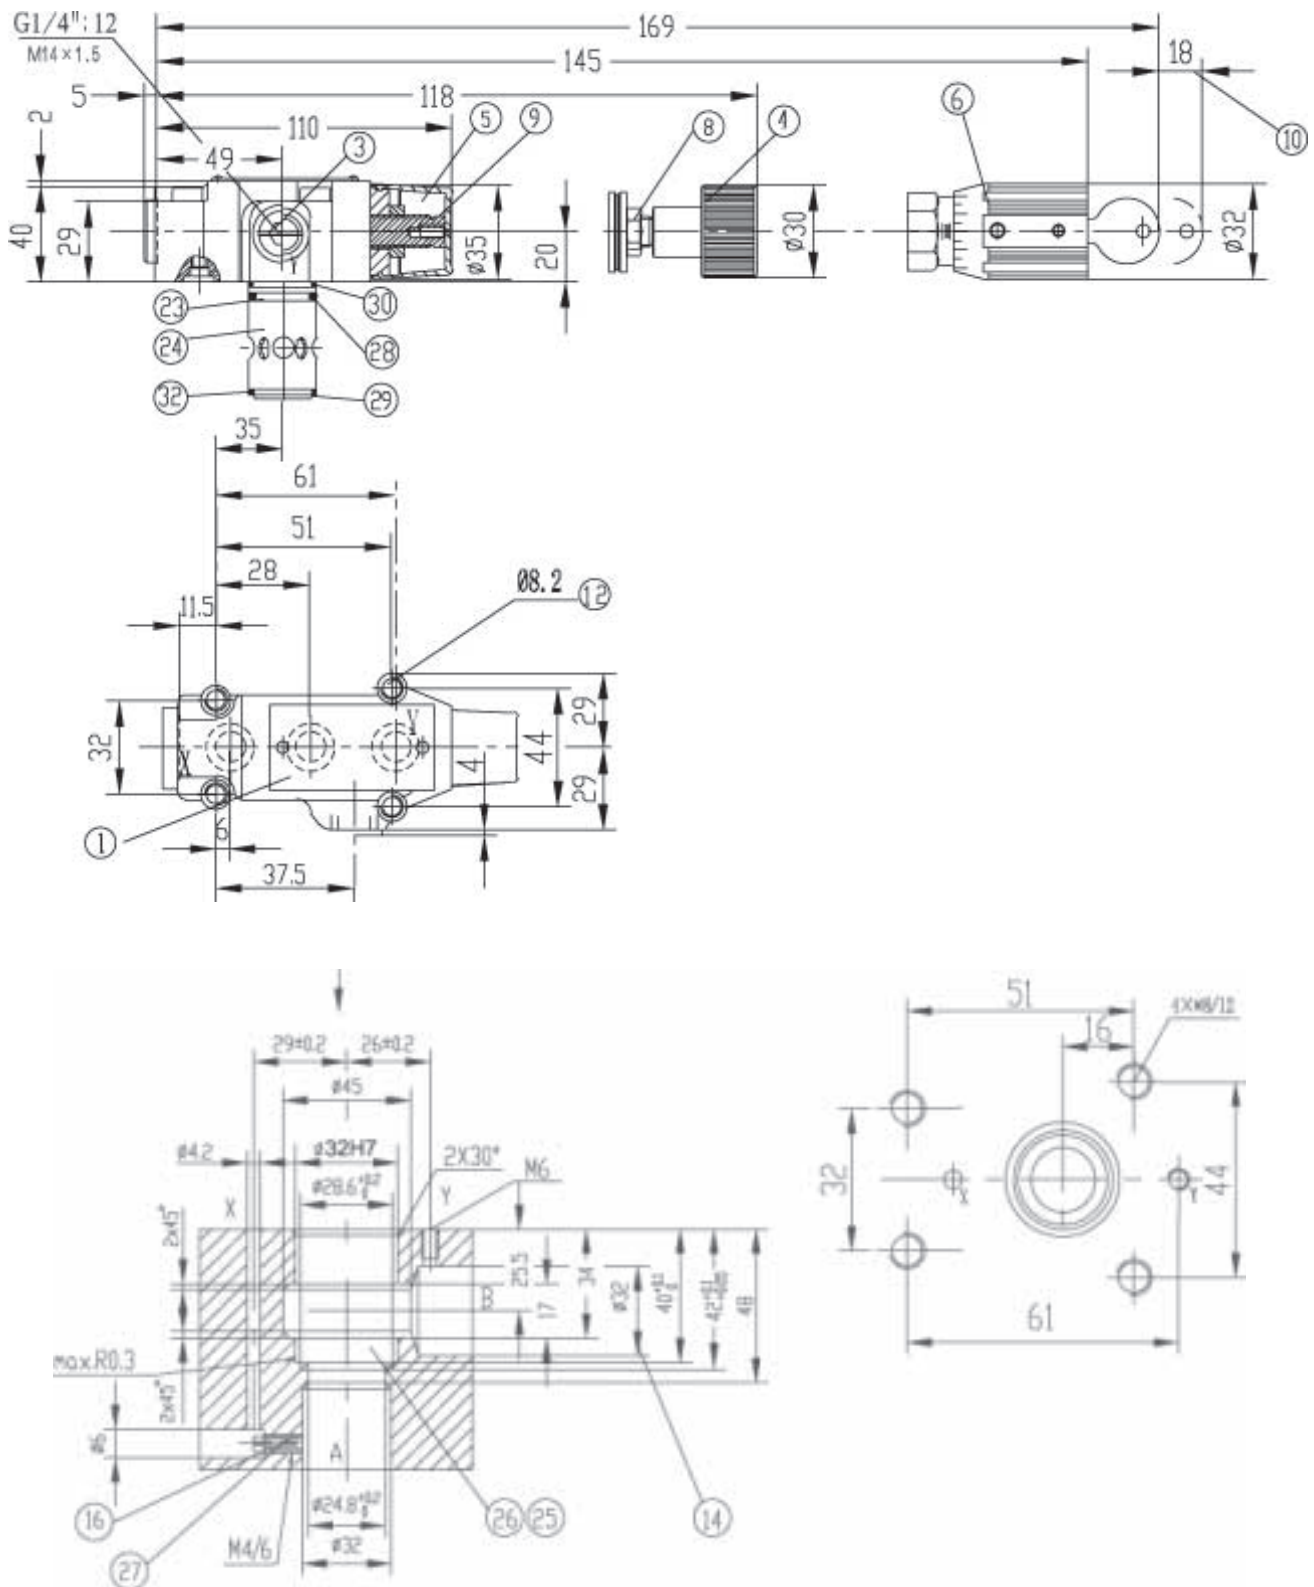

## Item explanations

- |   |   |
|---|---|
| 1 Nameplate                                   | 19 The dimension of the high-power solenoid "B"   |
| 2 Port X for external pilot oil supply        | 20 Space required to remove plug-in connector   |
| 3 Port Y for external pilot oil drain         | 21 Switching shock damping valve, optional  |
| 4 Adjustment element 1                        | 22 Omitted with internal pilot oil drain  |
| 5 Adjustment element 2                        | 23 O-ring 9.25X1.78   |
| 6 Adjustment element 3                        | 24 Main spool assembly  |
| 8 Lock nut 22 A/F                             | 25 The $\Phi 32$ bore may connect the $\Phi 45$ bore at any position. Please take care that the connection hole X and the fixing holes are not damaged. |
| 9 Hexagon 10 A/F                              | 26 Back-up ring and O-ring must be inserted into this bore before assembling the main spool.  |
| 10 Space required to remove key               | 27 Cartridge element include orifice and main spool assembly  |
| 11 Locating pin                               | 28 O-ring 28x 1.8   |
| 12 Valve fixing holes                         | 29 O-ring 27.3 x 2.4  |
| 13 Directional spool valve WE6                | 30 O-ring 28 x 2.65   |
| 14 Solenoid "a"                               | 32 Back-up ring 28.4X32X0.8   |
| 15 Hand override, optional                    |   |
| 16 Plug-in connector "Z4"                     |   |
| 17 Large plug-in connector "Z5" and "Z5L"     |   |
| 18 The dimension of the standard solenoid "A" |   |

Subplates for:

| DB/DBW10            | DB/DBW20          | DB/DBW30          | DBC/DBWC           |
|---------------------|-------------------|-------------------|--------------------|
| G545/01 (G3/8")     | G408/01 (G3/4")   | G410/01 (G11/4")  | G51/01 (G1/4")     |
| G545/02 (M18 × 1.5) | G408/02 (M27 × 2) | G410/02 (M42 × 2) | G51/02 (M14 × 1.5) |
| G546/01 (G1/2")     | G409/01 (G1")     | G411/01 (G11/2")  |                    |
| G546/02 (M22 × 1.5) | G409/02 (M33 × 2) | G411/02 (M48 × 2) |                    |
| See page 148、149    |                   |                   |                    |

Valve fixing screws for:

Types DB/DBW 10

4-M12 x 50 -10.9(GB/T70.1-2000);  $M_A = 130 \text{ Nm}$

Types DB/DBW 20

4-M16 x 50 -10.9(GB/T70.1-2000);  $M_A = 310 \text{ Nm}$

Types DB/DBW 30

4-M18 x 50 -10.9(GB/T70.1-2000);  $M_A = 430 \text{ Nm}$

Types DBC/DBWC, DBT/DBWT


Types DBC 10/DBWC 10 and types DBC 30/DBWC 30

4-M8 x 40 -10.9(GB/T70.1-2000);  $M_A = 37 \text{ Nm}$

Required surface finish  
of mating piece



## NOTICE

1. The fluid must be filtered. Minimum filter fineness is 20  $\mu\text{m}$ .
2. The tank must be sealing up and an air filter must be installed on air entrance.
3. Products without subplate when leaving factory, if need them, please ordering specially.
4. Valve fixing screws must be high intensity level (class 10.9). Please select and use them according to the parameter listed in the sample book.
5. Roughness of surface linked with the valve is required to  .
6. Surface finish of mating piece is required to 0.01/100mm.

## **ANNOTATIONS :**

---

### **HUADE AMÉRICA**

CEP : 03162-020

RUA HIPÓDROMO 1445 – MOOCA, SÃO PAULO, SP, BRASIL

TEL : (11) 3186-5959

[huade@huade.com.br](mailto:huade@huade.com.br)

[www.huade.com.br](http://www.huade.com.br)